

re: **Response to City Comments**
 Proposed Residential Development
 475 Terry Fox Drive – Ottawa, Ontario

to: Ironclad Developments Inc. – **Nikolas Kyriakopoulos** – nkyriakopoulos@ceengineering.ca

date: July 14, 2026

file: PG7418-MEMO.01 Revision 4

Further to your request and authorization, Paterson Group (Paterson) has prepared the current memorandum to provide geotechnical responses to City of Ottawa comments dated August 29, 2025, and revised to consider the response to those comments in a letter dated November 24, 2025. The following memorandum should be read in conjunction with the current Geotechnical Report PG7418-1 Revision 4 dated April 17, 2026, prepared for the aforementioned site.

City Review Comments (August 29, 2025)

Comment 6: *Please coordinate with the civil consultant to confirm if the proposed retaining walls on site will require a global stability analysis report and drawings. These documents will be required to make for a complete submission if the proposed retaining walls are greater than 1.0 m in height.*

Response: Based on Paterson's review of the currently proposed grading concepts, retaining walls reaching up to 1.54 m in height will be required. Based on this information, Paterson has subsequently prepared a global stability analysis of the highest and most critical segment of the proposed retaining wall structure based on the current civil design drawings. This analysis considers a surcharge of 15 kPa, equivalent to typical traffic loading, representing trees to consider their presence along the top of the wall area.

Based on our review, the factors of safety for the static and seismic loading cases exceed the required minimum factors of safety of 1.5 and 1.1, respectively, and are considered acceptable from a geotechnical and global stability perspective. The analysis was undertaken using SLIDE, a computer program which permits a two-dimensional slope stability analysis using several methods including the Bishop's method, which is a widely used and accepted analysis method. The cross-sections are appended to this memorandum.

Comment 7: *Cross-sections are required for the proposed retaining walls.*

Response: Cross-sections of a typical segmental block retaining wall design that will be required for the proposed retaining wall during the detailed design stage has been appended to this memorandum in response to this comment. The attached typical detail provides an example of the type of retaining wall structure that is considered feasible and suitable for the subject site from a geotechnical perspective.



Comment 8: *Confirm if the proposed walls on each side of the ramp to the underground parking garage are considered structural/foundation walls or retaining walls.*

Response: Typically, these walls are considered structural since they will be designed as cast-in-place reinforced concrete structures and attached to the remainder of the foundation structure. Their design will be reviewed from a geotechnical perspective during the detailed design stage to ensure suitable frost protection and drainage has been provided to them from a geotechnical perspective.

Supportability Comments

Comment 53: *Sections 4.3 - Groundwater and 6.5 - Groundwater Control of the Geotechnical report should be updated to include a groundwater monitoring program with data sufficient to establish the seasonal high groundwater table elevation, as opposed to a single observation in February. Once this elevation is known, it should inform section 6.5 and what level of groundwater control and dewatering are required.*

Response: Paterson obtained this information and the results remain unchanged since Paterson assumed fully saturated conditions. Reference should be made to Section 6.5 of the current Geotechnical Report for the associated recommendations.

Comment 54: *Further information regarding the potential impacts of dewatering on adjacent structures and what level of foundation drainage, both temporary and permanent, would be required is required based on Section 3.3.5 - Foundation Drainage of the City's Geotechnical Investigation and Reporting Guidelines. It is unclear how the impact could be determined without long term groundwater level monitoring.*

Response: The recommended foundation drainage system considers the proximity of the proposed structures to neighboring structures, as well as long-term dewatering resulting from the implementation of these systems, and assumptions identified in our response to Comment 53. Based on that review, the proposed structures will not result in long-term dewatering that would negatively impact neighboring structures and infrastructure.

Comment 55: *What is the long-term impact of this development on the groundwater table in this area?*

Response: It is expected there will be a negligible long-term impact on the groundwater table for the surrounding area. The groundwater table is expected to lower to close to the founding depth in proximity to each of the proposed structures, however, the low permeability of the subsoils that will surround these buildings will result in a zone of influence that is limited to within the proximity of the subject site.



Comment 56: *Do planting restrictions apply to trees of size smaller than 7.5m in height? Note that some small coniferous trees and ornamental trees (4-1m – 7.5m and < 4.0m in height) are being proposed within 4.5m from the foundation.*

Response: At this time, it is understood that the proposed structures will be supported by deep foundations consisting of driven piles extending to refusal to advancement. Since the structures will be supported by a foundation that does not attain support from the clay subsoils, there are no applicable tree planting setback restrictions for the proposed structures from a geotechnical perspective.

Comment 57: *Are there any minimum tree setbacks from the proposed retaining walls on site? Could the structural integrity of these retaining walls be influenced if trees are being proposed along them, especially the ones planted at the bottom of the wall, where roots could grow underneath the walls footings?*

Response: There are no specific tree planting setbacks applicable to proposed retaining walls. However, the retaining wall designer should consider both the additional loads applied from trees in close proximity to retaining walls, as well as the implementation of root barriers to protect the retaining wall systems to resist pressures exerted by root systems. Trees located in front of the wall may be accommodated by thickened and reinforced bedding layers where clay soils may be present at the founding depth of the proposed retaining wall bedding layer.

Comment 58: *Are clay dikes required for this development?*

Response: Based on our review of the currently proposed site servicing plans prepared by D.B. Gray Engineering Inc (Revision 5 dated July 10, 2026), clay seals are not considered required for the subject site from a geotechnical perspective.

Comment 59: *Please discuss the following topics in the report:*

- a. *Backfilling of the existing ditch within the site and ROW boulevard.*
- b. *The proposed site grading being greater than the permissible grade raises within the proposed buildings, parking lot and existing ditch.*
- c. *The pavement design for the road reinstatement works required as part of the watermain extension on Kanata Avenue and Terry Fox Drive, based on their road classification.*
- d. *If encroachment over the City's right of way is anticipated during construction of the foundation.*

Responses:

- a) Backfilling throughout the existing ditch is recommended to be undertaken as identified in Section 5.2 of the current Geotechnical Report.
- b) The current Geotechnical Report advises if higher than permissible grade raises are required that solutions associated with mitigating these exceedances would be explored; reference should be made to the grading plan review memorandum prepared by Paterson Group addressing this item.



- c) Reference should be made to Section 5.7 of the Current Geotechnical Report.
- d) Based on the existing topographic information and proposed USF elevation identified on the civil design drawings, the building excavations are not anticipated to extend beyond the property boundaries.

Comment 60: *Please include your responses to the above comments in the report*

Response: The responses to the above-noted comments have been incorporated in the current Geotechnical Report.

Comment 61: *Once the civil and landscaping drawings are finalized, please provide a stamped and signed memo identifying that the most recent site design drawings have been reviewed from a geotechnical perspective and are in keeping with the geotechnical recommendations provided in the investigation.*

Response: Reference should be made to Paterson Group Memorandum PG7418-MEMO.02 Revision 4 dated July 14, 2026, summarizing our review of the grading and landscaping design drawings. In summary, the proposed designs are acceptable from a geotechnical perspective. The implementation of lightweight fill has been recommended for a portion of Building B and Building C where grade raise exceedances have been identified and may be mitigated by the recommended measure accordingly.

City Review Comments (November 24, 2025)

Comment 27a: *The geotechnical investigation and geotechnical responses to City comments, both prepared by Paterson Group, contain conflicting information with regard to landscaping considerations. The investigation recommends tree planting setbacks in accordance with SMC planting guidelines, but the response document describes deep foundations (not supported on clay), removing the need for tree planting setbacks. Please clarify the recommendations within the geotechnical report, based on the foundation type and depth. If no SMD setbacks apply, the Landscape Plan must be revised with larger-growing trees in the ROW.*

Response: Paterson understands that the proposed foundations will consist of deep foundations such as end-bearing driven piles or conventional spread footings placed on the bedrock surface. Since the proposed buildings will not be supported by the clay deposit, there are no applicable tree planting setbacks for the building footprint, which have been removed from the current Geotechnical Report.



Comment 71: *Please document your responses to the previous comments #52, #53 and #58d in your geotechnical investigation.*

Response: The Geotechnical Report does not concern Comment #52, and as such, it will not be included in the Geotechnical Report. The remaining comment responses are provided in the aforementioned Geotechnical Report.

Comment 72: *The following grades from the grading plan are higher than the permissible grade raise, but aren't discussed in your geotechnical memo. Discussion must be provided.*

Response: Reference should be made to Paterson Group Memorandum PG7418-MEMO.02 Revision 4 dated July 14, 2026, summarizing our review of the grading and landscaping design drawings. In summary, the proposed designs are acceptable from a geotechnical perspective. The implementation of lightweight fill has been recommended for a portion of Building B and Building C where grade raise exceedances have been identified and may be mitigated by the recommended measure accordingly. The aforementioned exceedances are considered minor and acceptable from a geotechnical perspective and were considered during the original review dated October 29, 2025.

Comment 73: *Thank you for providing a global stability analysis for the highest section of the retaining wall. Although this is the highest section of the retaining wall, can you confirm that it is also the most critical cross-section that could be analyzed for this site? Perhaps the highest section of the retaining wall may not be the most critical if elsewhere along the wall larger trees are being proposed closer to the top of wall? Please confirm.*

Response: Reference should be made to our response to Comment #7. In summary, Paterson has confirmed that the section considered is the most critical section and an additional surcharge has been applied to consider the presence of trees equivalent to typical traffic loading.

Comment 74: *[City's response to previous deficiency #7]: Noted, this comment has been moved under the comments section. Please provide the actual cross-sections of the proposed retaining wall once available.*

Response: This comment has been acknowledged; this will be provided at the detailed design stage when the retaining wall design is typically and most appropriately complete.

City Review Comments (February 9, 2026)

Comment 142: *The geotechnical report must confirm if there are tree planting restrictions for trees and plants smaller than 7.5m in height. The geotechnical response memo (PG7418-MEMO.01) indicated that there were no tree planting restrictions based on the proposed use of deep foundations; however, the response to comment 27a in the completeness matrix (Feb 9, 2026) indicates that the plans are not currently based on deep foundations.*



Response: The current geotechnical report has been revised to advise this setback is not considered applicable from a geotechnical perspective.

Row 67 of Comment Spreadsheet: A new armour stone retaining wall greater than 1.0 m in height has been introduced to the east of Building C; this wall also requires a) stamped structural drawings and b) an Internal Compound Stability (ICS) analysis, which confirms that the wall achieves a factor of safety of at least 1.5 for static conditions and 1.1 for seismic conditions.

Response: A retaining wall design will be provided at the detailed design stage and prior to building permits being granted, as is typical for these types of structures in the City of Ottawa. Based on our review, the proposed wall geometry and design is captured by the aforementioned design assessment complete for the 1.54 m high and critical section of the analyzed wall located along the northeastern property boundary. Based on this, the current wall has a global stability factor meeting the minimum requirements sought for the design and will be confirmed with the remaining design at the upcoming design stage and once it is appropriate to fulfill the design.

We trust that this information is satisfactory for your immediate requirements.


Best Regards,

Paterson Group Inc.

Nicholas F. R. Versolato, P.Eng., ing.

Drew Petahtegoose P.Eng.



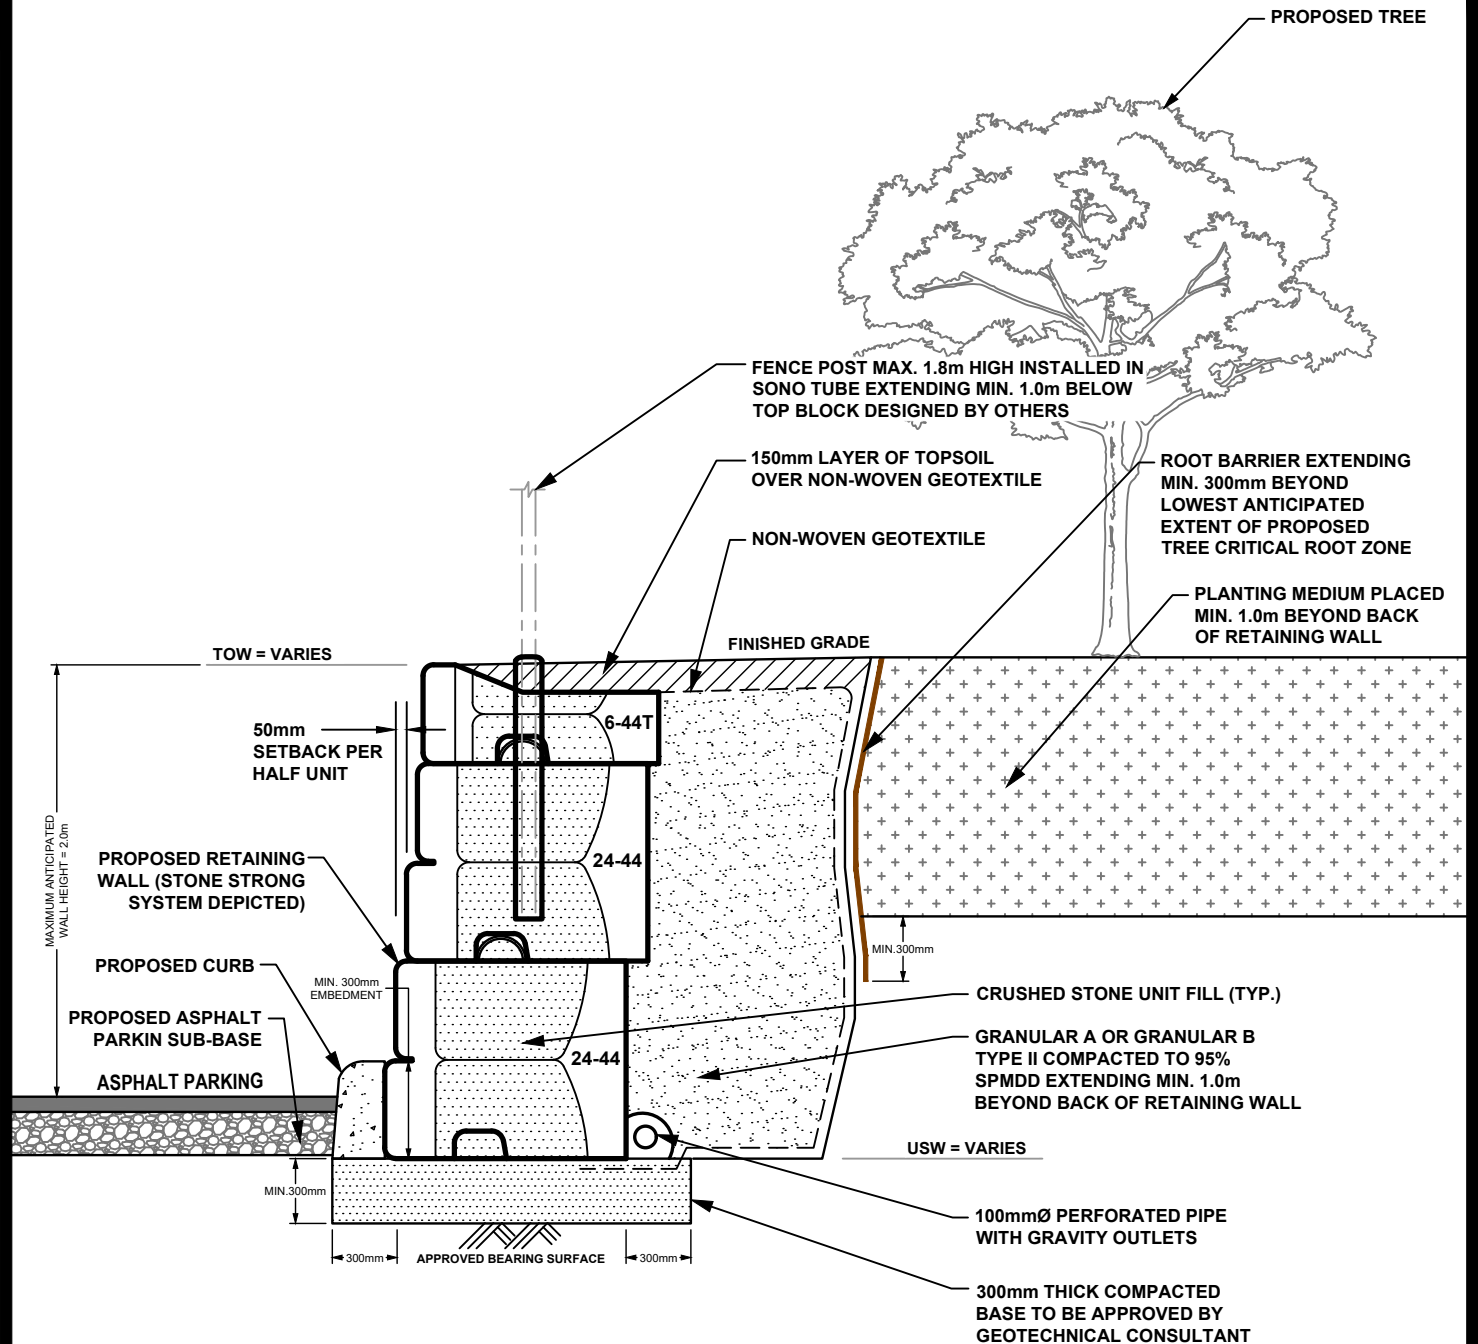

IRONCLAD DEVELOPMENTS INC.

PROPOSED RESIDENTIAL DEVELOPMENT
475 TERRY FOX DRIVE
OTTAWA, ONTARIO

Title:

**TYPICAL RETAINING
WALL CROSS-SECTION**

Date:

10/2025

Scale:

1:35

Drawn by:

NFRV

Checked by:


DP

Report No.:


PG7418

Drawing No.:

FIGURE 1

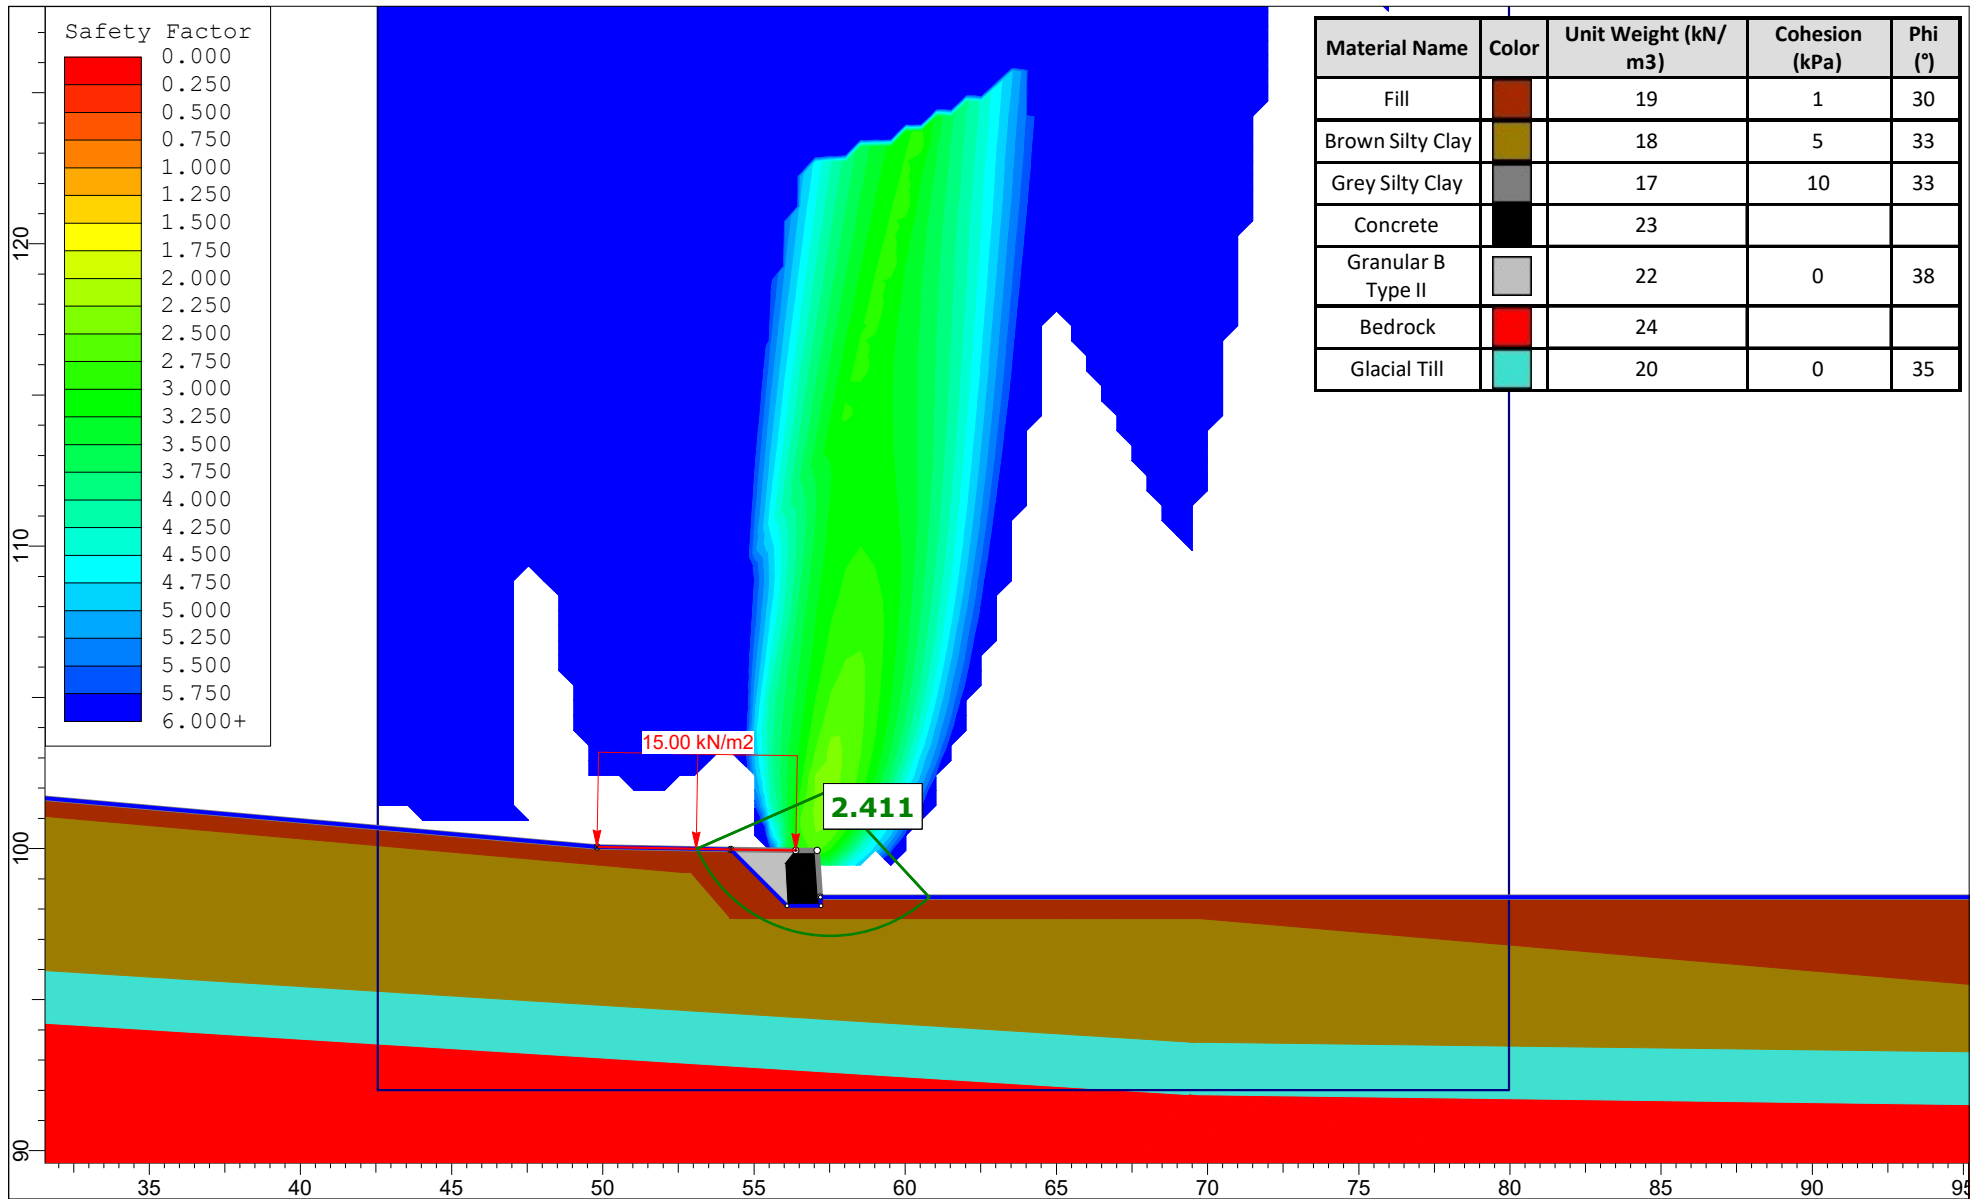

 SLIDEINTERPRET 9.031	Project Ironclad Developments Inc. Slope Stability Analysis 475 Terry Fox Drive, Ottawa, Ontario		
	Figure No. Figure 1A - Section A - Proposed Conditions - Static Loading		
	Drawn by: NFRV	Company: Paterson Group	
	Date: 2026-01-05	File No. PG7418	

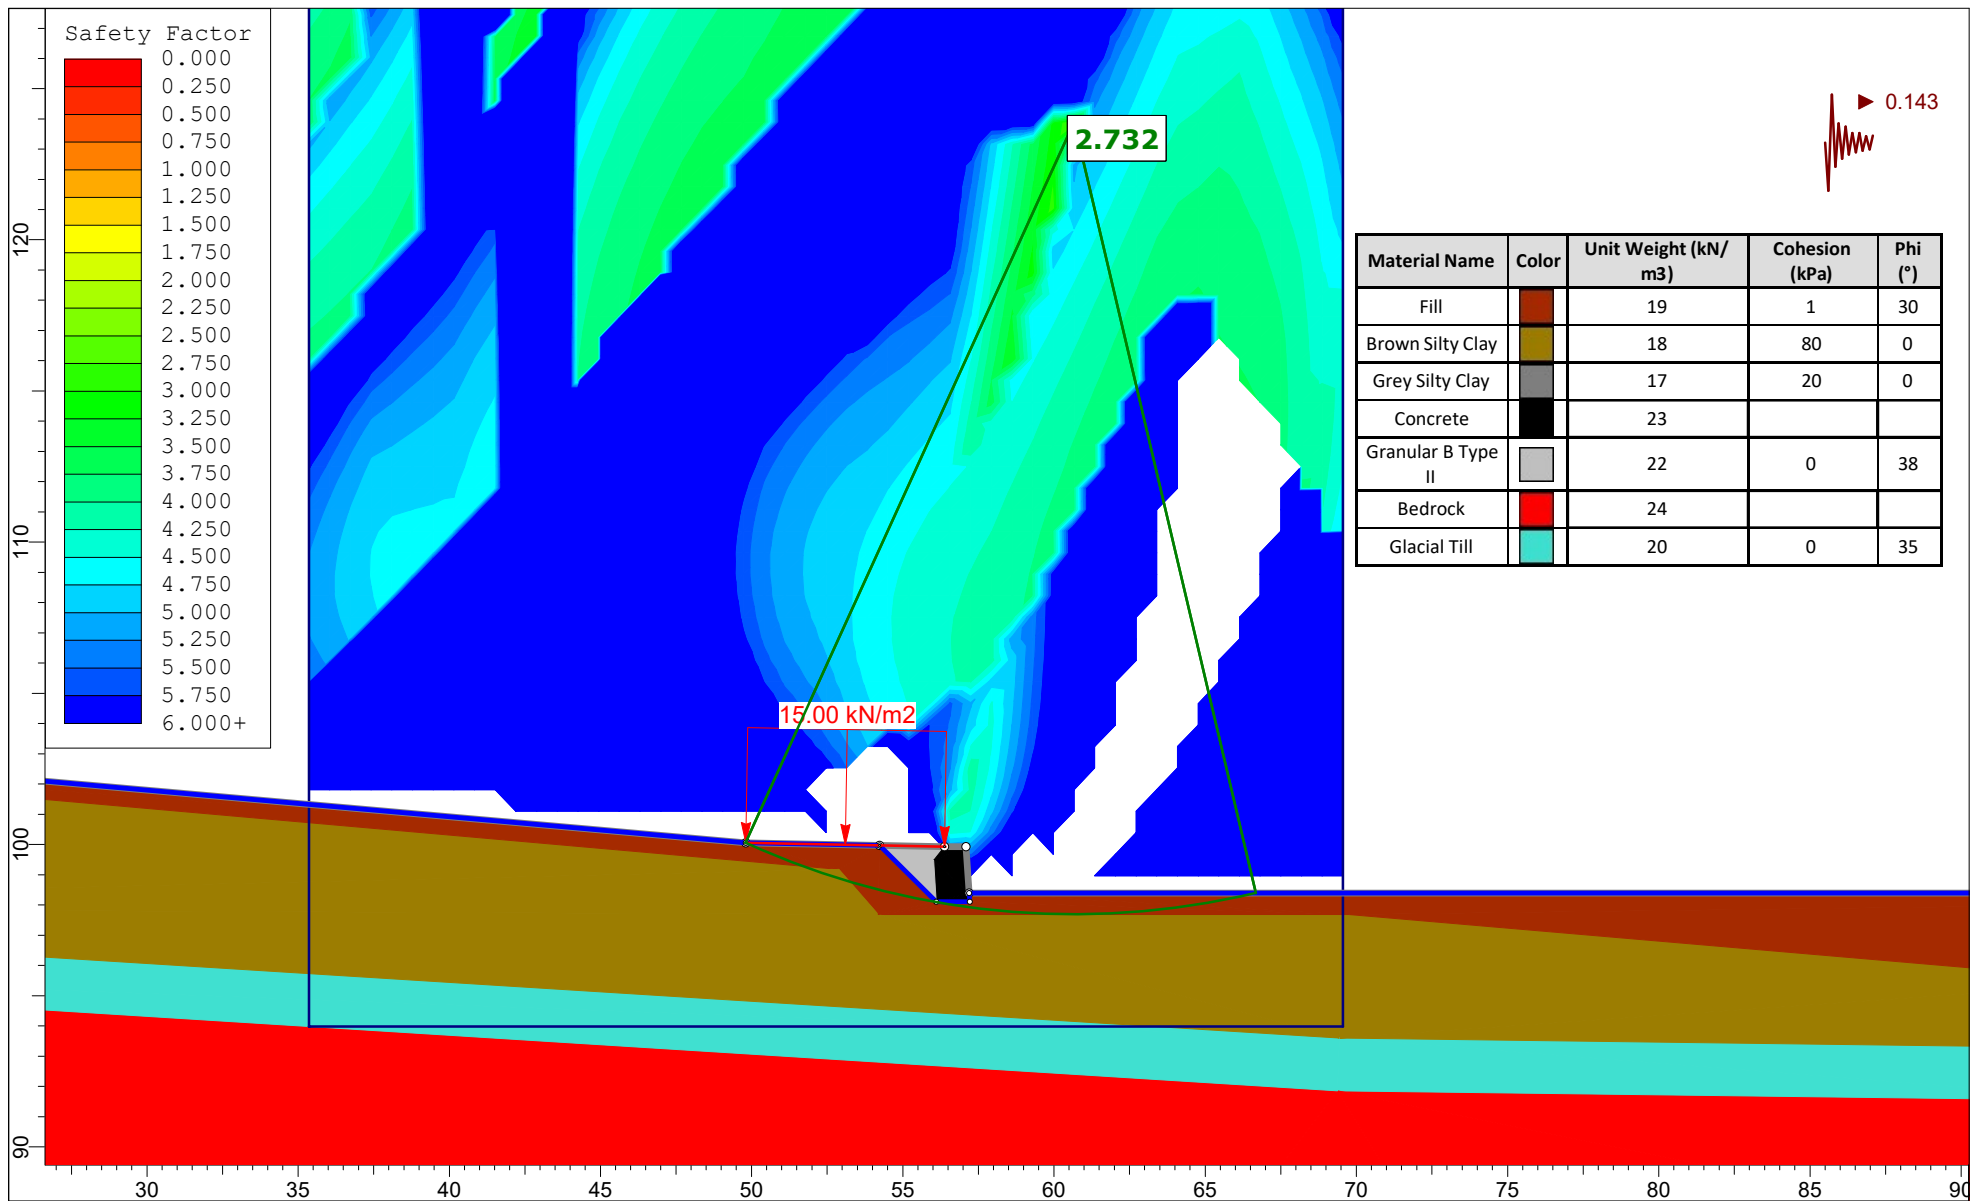

 PATERSON GROUP SLIDEINTERPRET 9.031	Project Ironclad Developments Inc. Slope Stability Analysis 475 Terry Fox Drive, Ottawa, Ontario		
	Figure No. Figure 1B - Section A - Proposed Conditions - Seismic Loading		
	Drawn by: NFRV	Company: Paterson Group	
	Date: 2026-01-05	File No. PG7418	

Geotechnical Investigation

Proposed Residential Development

475 Terry Fox Drive
Ottawa, Ontario

Prepared for Ironclad Developments Inc.

Report PG7418-1 Revision 4 dated April 17, 2026

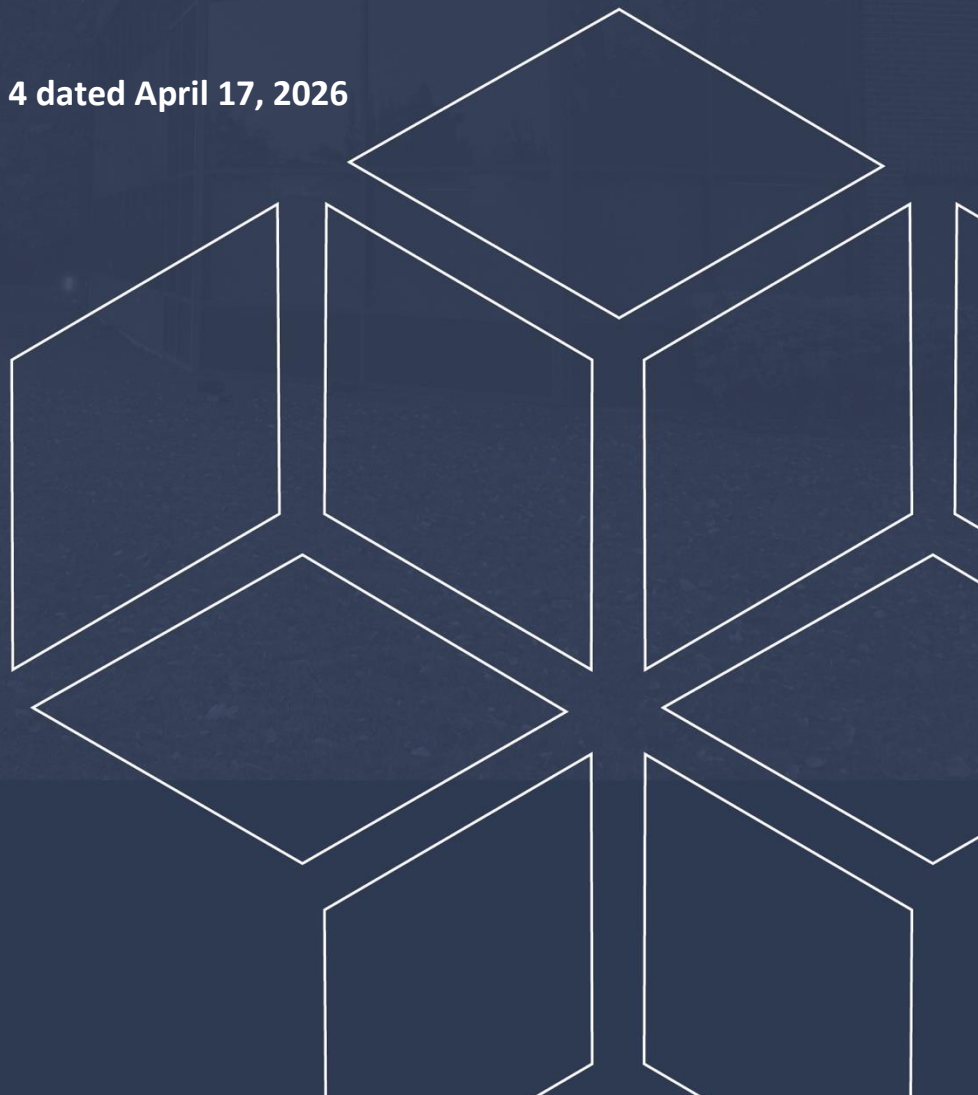


Table of Contents

	PAGE
1.0 Introduction	1
2.0 Proposed Development	1
3.0 Method of Investigation	2
3.1 Field Investigation	2
3.2 Field Survey	4
3.3 Laboratory Testing	4
3.4 Analytical Testing	5
3.5 Hydraulic Conductivity Testing	5
4.0 Observations	6
4.1 Surface Conditions	6
4.2 Subsurface Profile	6
4.3 Groundwater	9
4.4 Hydraulic Conductivity Testing Results	9
5.0 Discussion	11
5.1 Geotechnical Assessment	11
5.2 Site Grading and Preparation	11
5.3 Foundation Design	17
5.4 Design for Earthquakes	21
5.5 Basement Slab	23
5.6 Basement Wall	23
5.7 Pavement Design	25
6.0 Design and Construction Precautions	30
6.1 Foundation Drainage and Backfill	30
6.2 Protection of Footings Against Frost Action	31
6.3 Excavation Side Slopes	31
6.4 Pipe Bedding and Backfill	34
6.5 Groundwater Control	36
6.6 Winter Construction	37
6.7 Corrosion Potential and Sulphate	38
6.8 Landscaping Considerations	38
6.9 Low-Impact Development Considerations	41
7.0 Recommendations	42
8.0 Statement of Limitations	43

Appendices

Appendix 1	Soil Profile and Test Data Sheets Symbols and Terms Rock Core Photographs Atterberg Limits Testing Results Compressive Strength Testing Results Grain-Size Testing Results Analytical Testing Results Hydraulic Conductivity Testing Results
Appendix 2	Figure 1 – Key Plan Figure 1A and Figure 1B – Global Stability Analysis Results Figure 2 & 3 – Seismic Shear Wave Velocity Profiles Figure 4 – Typical Retaining Wall Cross-Section Drawing PG7418-1 – Test Hole Location Plan Drawing PG7418-2 – Permissible Grade Raise Plan

1.0 Introduction

Paterson Group (Paterson) was commissioned by Ironclad Developments Inc. to conduct a geotechnical investigation for the proposed residential development to be located at 475 Terry Fox Drive in the City of Ottawa (reference should be made to Figure 1 - Key Plan in Appendix 2 of this report).

The objectives of the geotechnical investigation were to:

- ☐ Determine the subsoil and groundwater conditions at this site by means of test holes.
- ☐ Provide geotechnical recommendations pertaining to design of the proposed development including construction considerations which may affect the design.

The following report has been prepared specifically and solely for the aforementioned project which is described herein. It contains our findings and includes geotechnical recommendations pertaining to the design and construction of the subject development as they are understood at the time of writing this report.

Investigating for the presence or potential presence of contamination on the subject property was not part of the scope of work of the present investigation. Therefore, the present report does not address environmental issues.

2.0 Proposed Development

Based on the available conceptual site plans provided by the client, it is anticipated that the future development will consist of three (3) multi-storey residential buildings. All three buildings (Building A, B and C) are anticipated to be six (6) storeys in height. Paterson understands each building will be provided with one level of underground parking, and that Building A and Building B will share and be connected by their basement level.

Associated access lanes, at-grade parking, landscaped and hardscaped areas and a retaining wall are also anticipated as part of the development. The development is anticipated to be municipally serviced and will be supported by municipal service extensions throughout Terry Fox Drive.

3.0 Method of Investigation

3.1 Field Investigation

Field Program

The field program for the current geotechnical investigation was carried out from February 5 to 7, 2025 and consisted of advancing a total of 10 test pits and 5 boreholes below the existing ground surface to a maximum depth of 10.4 m and 4.1 m, respectively.

The test hole locations were distributed in a manner to provide general coverage of the subject site while taking into consideration underground utilities and site features. The test pit and borehole locations are shown on the attached Drawing PG7418-1 – Test Hole Location Plan included in Appendix 2.

The test pits were advanced using an excavator. All fieldwork was conducted under the full-time supervision of Paterson personnel under the direction of a senior engineer from our geotechnical department. The test pitting procedure consisted of advancing to the required depths at select locations, sampling and testing the overburden.

The boreholes were completed using a rubber-track low-clearance auger drilling rig operated by a two-person crew. The testing procedure consisted of augering, excavating, and coring to the required depth at the selected location and sampling the overburden and/or bedrock.

A previous subsurface investigation was undertaken by Paterson in October 2015 within the subject site. At that time, 6 boreholes were advanced throughout the subject site to a maximum depth of 12.6 m below the ground surface. The test hole locations from the previous study are shown on Drawing PG7418-1 - Test Hole Location Plan included in Appendix 2.

Sampling and In Situ Testing

Soil samples were collected from the boreholes using two different techniques, namely, sampled directly from the auger flights (AU) or collected using a 50 mm diameter split spoon (SS) sampler. The bedrock was cored to assess the bedrock type and quality. All samples were visually inspected and initially classified on site. The auger and split-spoon samples were placed in sealed plastic bags, and rock cores (RC) were placed in cardboard boxes.

All samples were transported to our laboratory for further examination and classification. The depths at which the auger, split spoon and rock core samples were recovered from the boreholes are shown as AU, SS and RC, respectively, on the Soil Profile and Test Data sheets presented in Appendix 1. Photographs of the rock core are presented in Appendix 1.

The Standard Penetration Test (SPT) was conducted in conjunction with the recovery of the split-spoon samples. The SPT results are recorded as “N” values on the Soil Profile and Test Data sheets. The “N” value is the number of blows required to drive the split-spoon sampler 300 mm into the soil after a 150 mm initial penetration using a 63.5 kg hammer falling from a height of 760 mm.

Diamond drilling was completed at borehole BH 2-25 to confirm the bedrock type and quality. A recovery value and a Rock Quality Designation (RQD) value were calculated for each drilled section of bedrock and are presented as RC on the Soil Profile and Test Data sheets in Appendix 1. The recovery value is the ratio of the bedrock sample length recovered over the drilled section length, in percentage.

The RQD value is the total length ratio of intact rock core length more than 100 mm in one drilled section over the length of the drilled section, in percentage. These values are indicative of the quality of the bedrock.

The overburden thickness was evaluated by completing dynamic cone penetration tests (DCPT) at boreholes BH 1-25 and BH 3-25. A DCPT test was completed at borehole BH 4 of the previous investigation. The DCPT testing consisted of driving a steel drill rod, equipped with a 50 mm diameter cone at the tip, using a 63.5 kg hammer falling from a height of 760 mm. The number of blows required to drive the cone into the soil is recorded for each 300 mm increment.

Soil samples from the test pits were recovered from the side walls of the open excavation. Grab samples were collected from the test pits at selected intervals. The samples were initially classified on site, placed in sealed plastic bags and transported to our laboratory. The depths at which the grab samples were recovered from the test pits are shown as G on the Soil Profile and Test Data sheets in Appendix 1.

Undrained shear strength testing was carried out in cohesive soils using a field vane apparatus.

The subsurface conditions observed in the test pits and boreholes were recorded in detail in the field. The soil profiles are logged on the Soil Profile and Test Data Sheets in Appendix 1 of this report. The Soil Profile and Test Data sheets from the previous subsurface investigation are also included in Appendix 1.

Groundwater

For the current investigation, monitoring wells were installed in BH 1-25 and BH 2-25. Flexible polyethylene standpipe piezometers were installed in the remainder of the boreholes from the current investigation to permit monitoring of the groundwater levels subsequent to the completion of the sampling program

The groundwater observations are discussed in Subsection 4.3 and presented in the Soil Profile and Test Data sheets in Appendix 1.

Monitoring Well Installation

Typical monitoring well construction details are described below:

- ☐ 1.5 m of slotted 32 mm or 51 mm diameter PVC screen at specified intervals within the borehole column.
- ☐ 51 mm diameter PVC riser pipe from the top of the screen to the ground surface.
- ☐ No.3 silica sand backfill within annular space around screen.
- ☐ 300 mm thick bentonite hole plug directly above PVC slotted screen.
- ☐ Clean backfill from top of bentonite plug to the ground surface.

Refer to the Soil Profile and Test Data sheets in Appendix 1 for specific well construction details.

3.2 Field Survey

The test hole locations and ground surface elevation at each test hole location were surveyed by Paterson using a handheld GPS and referenced to a geodetic datum. The locations of the test holes, and the ground surface elevation at each test hole location, are presented on Drawing PG7418 - 1 - Test Hole Location Plan in Appendix 2.

3.3 Laboratory Testing

Soil samples were recovered from the subject site and visually examined in our laboratory to review the results of the field logging. A total of one linear shrinkage analysis, two grain size distribution testing, and two Atterberg limit tests were completed on selected soil samples. One unconfined axial compressive strength test was completed on a select rock core sample. Moisture content testing was complete on all recovered soil samples from the current investigation. The results of the testing are presented in Section 4.2 and are provided in Appendix 1.

Sample Storage

All samples will be stored in the laboratory for a period of one (1) month after issuance of this report. They will then be discarded unless directed otherwise.

3.4 Analytical Testing

One (1) soil sample was submitted for analytical testing to assess the corrosion potential for exposed ferrous metals and the potential of sulphate attacks against subsurface concrete structures. The sample was submitted to determine the concentration of sulphate and chloride, the resistivity, and the pH of the samples. The results are presented in Appendix 1 and are discussed further in Subsection 6.7.

3.5 Hydraulic Conductivity Testing

Hydraulic conductivity testing was conducted at one (1) monitoring well location to provide insight on the hydraulic properties of the bedrock at the subject site. The test data was analyzed using AQTESOLV Pro Version 4.5 aquifer analysis software package by HydroSOLVE Inc and the results were processed as per the method set out by Hvorslev (1951). Assumptions inherent in the Hvorslev method include a homogeneous aquifer of infinite extent and a screen length significantly greater than the monitoring well diameter.

The assumption regarding aquifer storage is considered to be appropriate for groundwater inflow through the overburden aquifer. The assumption regarding screen length and well diameter is considered to be met based on a screen length of 1.5 m and a diameter of 0.03 to 0.05 m. While the idealized assumptions regarding aquifer extent and homogeneity are not strictly met in this case (or in any real-world situation), it has been our experience that the Hvorslev method produces effective point estimates of hydraulic conductivity in conditions similar to those encountered at the subject site. The testing results are further discussed in Subsection 4.4 of this report.

4.0 Observations

4.1 Surface Conditions

The majority of the subject site currently consists of undeveloped vacant grassed land, with the exception of a sparsely treed area within the central portion of the parcel. The subject site is bordered by Terry Fox Drive along the southwestern property boundary, by Kanata Avenue along the northwestern property boundary, and by residential dwellings along the eastern property boundary. A traffic light intersection between Kanata Avenue and Terry Fox Drive was noted beyond the western property boundary.

The ground surface across the subject site is relatively flat, sloping downwards gently from east to west between approximate geodetic elevations of 102.5 to 95 m. The grade across the site is relatively similar to the adjacent roadways. An existing ditch was noted along the northwestern and southwestern property boundaries along Kanata Avenue and Terry Fox Drive, respectively. The ditch along Kanata Avenue was noted to be relatively flat and at grade with the surrounding ground surfaces, while the ditch along Terry Fox Drive was noted to be approximately 1 m deeper than the surrounding ground surfaces.

4.2 Subsurface Profile

Generally, the subsurface profile at the test hole locations consists of a 0.1 to 0.3 m thick layer of topsoil underlain by a layer of fill. A deposit of brown to grey silty clay was noted below the fill, which was further underlain by glacial till and further by the underlying bedrock formation.

Fill was observed extending to depths between 0.5 and 2.2 m below the existing ground surface at all test hole locations, with the exception of TP 2-25, TP 6-25, and TP 10-25. The fill was generally observed to consist of silty clay with sand, gravel, and organics.

The fill layer was observed to generally be underlain by a deposit of silty clay. The silty clay deposit consisted of very stiff to firm, brown silty clay which extended to approximate depths between 2.0 to 5.3 m below the ground surface. The brown silty clay layer was observed to be underlain by a layer of stiff to firm, grey silty clay which extended to approximate depths between 4.1 to 8.3 m below ground surface.

In several areas, the fill material was seen to be underlain by a 0.3 to 0.4 m thick layer of sandy silt, notably at TP 4-25, TP 5-25, and TP 7-25. A 0.4 m thick layer of silty sand was noted below the fill layer at BH 2-25.

The clay deposit was observed to be underlain by a deposit of glacial till. The glacial till deposit generally consists of loose to dense, grey silty sand or silty clay with variable amounts of clay, sand, gravel, cobbles and rock fragments. The glacial till deposit was observed to extend to approximate depths between 1.1 and 10.4 m below ground surface.

Practical refusal to excavation, augering, or DCPT testing was encountered at depths ranging from 0.2 to 10.4 m below the existing ground surface at several test hole locations across the subject site.

Reference should be made to the Soil Profile and Test Data sheets in Appendix 1 for the details of the soil profile encountered at each test hole location.

Bedrock

Granite with interbedded granodiorite bedrock was cored in BH 2-25 to a depth of 6.9 m below ground surface. The recorded average RQD values ranged from 83 to 58, while the recovery values were consistently 100%. Based on these results the quality of the bedrock ranges from good to fair quality.

Based on available geological mapping, the bedrock in the subject area consists of intrusive igneous bedrock of the Precambrian period, with an overburden drift thickness ranging between 0 to 10 m depth.

Atterberg Limits Testing

Atterberg limits testing as well as shrinkage limit testing was completed on recovered silty clay samples at selected locations throughout the subject site. The results of the Atterberg limits are presented in Table 1 and on the Atterberg Limits Results sheet in Appendix 1.

Table 1 - Atterberg Limits Results						
Sample	Depth (m)	LL (%)	PL (%)	PI (%)	w (%)	Classification
BH 2-25 SS4	2.3 – 2.9	68	32	36	54.7	CH
BH 5A-25 SS7	4.6 – 5.2	53	24	29	59.2	CH
Notes: LL: Liquid Limit; PL: Plastic Limit; PI: Plasticity Index; w: water content; CH: Inorganic Clays of High Plasticity						

The results of the moisture content tests are presented on the Soil Profile and Test Data Sheet in Appendix 1.

Unconfined Compressive Strength Testing of Bedrock Core Sample

One (1) select bedrock core sample obtained by Paterson as part of the current investigation was tested for unconfined compressive strength. The results of the test are summarized in Table 2 below and presented on Unconfined Compressive Strength Testing Results on Appendix 1.

Table 2 – Summary of Unconfined Bedrock Compressive Strength Testing Results				
Borehole	Sample	Test Core Depth (m)	Test Core Elevation (m)	Unconfined Compressive Strength (MPa)
BH 2-25	RC1	4.73 – 4.82	91.62 – 91.53	107.7

Grain Size Distribution and Hydrometer Testing

Grain size distribution (sieve and hydrometer) analysis was completed on a selected recovered silty clay and glacial till deposit sample. The result of the grain size distribution analysis is presented in Table 3 and on the Grain Size Distribution sheets in Appendix 1.

Table 3 – Grain Size Distribution Results					
Sample	Depth (m)	Gravel (%)	Sand (%)	Silt (%)	Clay (%)
BH 1-25 SS5	4.6 – 5.2	0.3	2.6	50.6	46.5
BH 1-25 SS8	9.1 – 9.8	31.3	54.3	12.3	2.2
Note: The ground surface elevation at each borehole location was surveyed using a handheld GPS using a geodetic datum.					

Shrinkage Testing

Linear shrinkage testing was completed on a silty clay sample recovered at a depth of 2.3 – 2.9 m from BH 2-25 and yielded a shrinkage limit of 19.35 and a shrinkage ratio of 1.78.

4.3 Groundwater

Groundwater levels were recorded at each test hole location on February 18, 2025, and are presented in Table 4 below. The groundwater level readings are also presented in the Soil Profile and Test Data sheets in Appendix 1.

Table 4 – Summary of Groundwater Levels				
Test Hole Number	Ground Surface Elevation (m)	Measured Groundwater Level		Dated Recorded
		Depth (m)	Elevation (m)	
BH 1-25	96.43	2.13	94.30	February 18, 2025
		0.84	95.59	April 17, 2026
BH 2-25	96.35	2.10	94.25	February 18, 2025
		0.61	95.74	April 17, 2026
BH 4-25	95.78	Frozen		February 18, 2025
		0.90	94.88	April 17, 2026
BH 5A-25	97.17	2.61	94.56	February 18, 2025
		1.06	96.11	April 17, 2026
Note: The ground surface elevation at each borehole location was referenced to a geodetic datum				

It should be noted that surface water can become trapped within a backfilled borehole column, which can lead to higher-than-normal groundwater level readings. It should be noted that groundwater levels are subject to seasonal fluctuations. Therefore, groundwater levels could vary at the time of construction

4.4 Hydraulic Conductivity Testing Results

Hydraulic conductivity tests were conducted at two monitoring well locations throughout the subject site during the month of February 2025. The testing results are summarized in Table 5 below.

Table 5 – Summary of Hydraulic Conductivity Testing Results.						
Test Hole ID	Ground Surface Elevation (m)	Testing Depth Interval (m)	Testing Elevation Interval (m)	K (m/s)	Test Type	Soil Type
BH 1-25	96.43	7.31-8.83	89.12-87.60	2.29x10 ⁻⁷	Falling Head	Glacial Till
BH 2-25	96.35	5.33-6.86	91.02-89.49	7.15x10 ⁻⁵	Falling Head	Bedrock
				7.11x10 ⁻⁵	Rising Head	

Summary of Results

Hydraulic conductivity testing conducted at monitoring well screened within the glacial till yielded a hydraulic conductivity value of approximately 2.29×10^{-7} m/s. Hydraulic conductivity testing conducted at monitoring well screened within the bedrock yielded hydraulic conductivity values ranging between approximately 7.11×10^{-5} to 7.15×10^{-5} m/s.

These values are generally consistent with typical published values for glacial till, and bedrock. It should be noted that hydraulic conductivity may vary across the subject site depending on the composition/compaction and hydrostatic properties at a given location for the overburden and bedrock, respectively.

5.0 Discussion

5.1 Geotechnical Assessment

From a geotechnical perspective, the subject site is considered suitable for the proposed development. At this time, Building A (northern most structure) will be founded on a combination of conventional shallow footings placed upon a clean, surface sounded bedrock bearing surface and a deep foundation consisting of concrete filled steel pipe piles driven to refusal. Building B and Building C will be founded upon a deep foundation consisting of concrete fill steel pipe piles driven to refusal.

Bedrock removal is expected to be required to complete the excavation of the proposed basement levels for several buildings. Line drilling and controlled blasting where large quantities of bedrock need to be removed is recommended.

All contractors should be prepared for bedrock and oversized boulder removal. The blasting operations should be planned and completed under the guidance of a professional engineer with experience in blasting operations. Prior to undertaking blasting, pre-construction surveys will be required to be undertaken.

Due to the presence of a silty clay layer, proposed grading throughout the subject site will be subjected to a permissible grade restriction. Our permissible grade raise recommendations are discussed in Subsection 5.3.

The above and other considerations are discussed in the following sections.

5.2 Site Grading and Preparation

Stripping Depth

Topsoil and deleterious fill, such as those containing organic materials, should be stripped from under any buildings, paved areas, pipe bedding and other settlement sensitive structures. Care should be taken not to disturb adequate bearing soils below the founding level during site preparation activities. Disturbance of the subgrade may result in having to sub-excavate the disturbed material and the placement of additional suitable fill material.

Due to the shallow nature of the bedrock surface throughout the northern portion of the subject site, it is expected that the footings of the proposed buildings may extend below the bedrock surface. As such, it is expected all overburden material throughout those areas will be excavated from within the proposed building footprints.

Existing construction remnants, such as foundation walls and other construction debris should be entirely removed from within the building perimeters. Under paved areas, existing construction remnants, such as foundation walls, should be excavated to a minimum of 1 m below final grade, or up to the underlying bedrock formation, whichever is less.

Bedrock Removal

It is expected that line-drilling in conjunction with hoe-ramming, rock grinding and controlled blasting will be required to remove the bedrock for the underground parking levels for Building A and installing services. In areas of weathered bedrock and where only a small quantity of bedrock is to be removed, bedrock removal may be possible by hoe-ramming.

Prior to considering blasting operations, the blasting effects on the existing services, buildings, and other structures should be addressed. A pre-blast or pre-construction survey of the existing structures located in the proximity of the blasting operations should be carried out prior to commencing site activities. The extent of the survey should be determined by the blasting consultant and should be sufficient to respond to any inquiries or claims related to the blasting operations.

As a general guideline, peak particle velocities (measured at the structures) should not exceed the below noted vibration limits during the blasting program to reduce the risks of damage to the existing surrounding structures. The blasting operations should be planned and conducted under the supervision of a licensed professional engineer who is also an experienced blasting consultant.

Excavation side slopes in sound bedrock can be carried out using near vertical sidewalls. A minimum 1 m horizontal ledge should be left between the bottom of the overburden excavation and the top of the bedrock surface to provide an area to allow for potential sloughing of the overburden.

Vibration Considerations

Construction operations are the cause of vibrations, and possibly, sources of nuisance to the community. Therefore, means to reduce the vibration levels as much as possible should be incorporated in the construction operations to maintain, as much as possible, a cooperative environment with the residents.

The following construction equipment could be the source of vibrations: hoe ram, compactor, dozer, crane, truck traffic, etc. Vibrations, whether caused by blasting operations or by construction operations, could be the source of detrimental vibrations on the nearby buildings and structures. Therefore, all vibrations are recommended to be limited.

Two parameters are used to determine the permissible vibrations, namely, the maximum peak particle velocity and the frequency. For low frequency vibrations, the maximum allowable peak particle velocity is less than that for high frequency vibrations.

As a guideline, the peak particle velocity should be less than 15 mm/s between frequencies of 4 to 12 Hz, and 50 mm/s above a frequency of 40 Hz (interpolate between 12 and 40 Hz). The guidelines are for current construction standards. Considering that these guidelines are above perceptible human level and, in some cases, could be very disturbing to some people, a pre-construction survey is recommended be completed to minimize the risks of claims during or following the construction of the proposed buildings.

Overbreak in Bedrock

Igneous bedrock formations, such as granite, often contain inclusions of other rock types, like sedimentary or metamorphic rocks, which can create natural planes of weakness. These inclusions, known as xenoliths, differ in mineral composition and hardness from the surrounding igneous material, making them prone to fracturing more easily.

When blasting occurs, these inclusion planes can guide the blast energy unpredictably, causing overbreak. Additionally, variations in lithology within the igneous rock, such as quartz-rich or feldspar-rich zones, as well as variations in heterogeneity of the rock, with varying textures, mineral compositions, and grain sizes, can lead to differential fracturing, further contributing to overbreak.

Weathering from glacial activity has also impacted the strength of the upper layers of bedrock in the Ottawa area. Glaciers, through processes of erosion and abrasion, can remove the surface material of the rock, exposing underlying layers that may have been subjected to prolonged weathering. The freeze-thaw cycles, along with the physical and chemical weathering associated with glaciation, can cause the upper layers of the igneous rock to become more fractured and weakened. These weathered zones are typically more prone to fragmentation when blasted, leading to overbreak that extends deeper than intended into the solid, unweathered rock below.

The above-noted differences in the physical properties of the rock, combined with natural discontinuities and the effects of weathering, can lead to complex failure patterns that may result in overbreak that are difficult to account for in the blast design. Based on this, estimating the exact amount of backbreak and overbreak that may occur is not possible with conventional construction drill and blast methods.

Backbreak should be expected to occur along the perimeter of the building excavation footprint with conventional drill and blast bedrock removal methods. This could be reduced where consideration is given by the bedrock removal contractor to setback line-drilling from the perimeter of the building excavation footprint and to undertake grinding of the perimeter sidewalls. However, this is expected to result in additional time to complete the building excavation.

Overbreak is expected throughout the lowest level of blasting due to the combination of natural weaknesses from inclusion planes and varying lithology and heterogeneity of the in-situ bedrock surface, which all contribute to more easily fractured surface layers. It is very difficult to mitigate significant overblasting given the constraints posed by footing geometry and spacing with respect to the zone of influence of blasts and the bedrocks in-situ characteristics.

Depending on the methodology undertaken by the contractor, efforts taken to minimize backbreak and overbreak is expected to add unforeseen time and costs to the excavation operations and is not guaranteed to completely eliminate the potential for backbreak and overbreak. Overbreak below footings should be in-filled with lean-concrete and approved by Paterson prior to placing concrete.

As such, volume estimates of bedrock to be removed may not be reflective of the actual volume of bedrock that may be required to be removed at the time of construction. This may result in additional materials, such as imported fill and concrete, to make up for additional rock loss. It is recommended that the blasting operations be planned and conducted under the supervision of a licensed professional engineer who is an experienced blasting consultant.

Fill Placement

Fill placed for grading throughout the building footprint should consist, unless otherwise specified, of clean imported granular fill, such as Ontario Provincial Standard Specifications (OPSS) Granular A or Granular B Type II. Imported fill material should be tested and approved prior to delivery to the site. The fill should be placed in a maximum 300 mm thick loose lifts and compacted by suitable compaction equipment. Fill placed beneath the building should be compacted to a minimum of 98% of the standard Proctor maximum dry density (SPMDD).

Non-specified existing fill along with site-excavated soil could be placed as general landscaping fill and beneath exterior parking areas, existing ditches throughout the subject site and the western City of Ottawa right-of-way boulevard. This material should be compacted in maximum 300 mm thick loose lifts to at least 98% of the material's SPMDD using a suitably sized vibratory sheepfoot roller.

The fill should be prepared by segregating all cobbles and boulders larger than 200 mm in diameter, significant amounts of organics (i.e., peat, topsoil, roots, stumps, logs, etc.) and inorganic debris (i.e., construction debris, plastics, PVC, metals, etc.). Sampling and testing of the fill material for grain-size distribution and standard proctor values should be completed by Paterson prior to re-use of the subject fill. Frozen material may not be considered for this purpose. This process should be reviewed and approved by Paterson field personnel upon completion of each lift and who are experienced in reviewing the placement of soil fill in this manner.

Non-specified existing fill and site-excavated soils are not suitable for placement as backfill against foundation walls, unless used in conjunction with a geocomposite drainage membrane, such as CCW MiraDRAIN 2000 or Delta-Teraxx.

Fill used for grading beneath the base and subbase layers of paved areas should consist, unless otherwise specified, of clean imported granular fill, such as OPSS Granular A, Granular B Type II or select subgrade material. This material should be tested and approved by Paterson prior to delivery to the site. The fill should be placed in lifts no greater than 300 mm thick and compacted using suitable compaction equipment for the lift thickness. Fill placed beneath the paved areas should be compacted to at least 100% of its SPMDD.

If excavated rock is to be used as fill, it should be suitably fragmented to produce a well-graded material with a maximum particle size of 100 mm and matching an OPSS Granular B Type II crushed stone gradation envelope. Where the fill is open graded, a blinding layer of finer granular fill and/or a woven geotextile may be required to prevent adjacent finer materials from migrating into the voids, with associated loss of ground and settlements. This can be assessed at the time of construction and through laboratory testing of samples of the fill recovered by Paterson field personnel. Site-generated blast rock fill should be compacted using a suitably sized smooth drum vibratory roller when considered for placement.

Under winter conditions, if snow and ice is present within the blast rock fill below future basement slabs, then settlement of the fill should be expected and support of a future basement slab and/or temporary supports for slab pours will be negatively impacted and could undergo settlement during spring and summer time conditions. Paterson personnel should complete periodic inspections during fill placement to ensure that snow and ice quantities are minimized. Providing a heat source during winter construction may be recommended should compacted fill material is intended to be exposed for long periods of time.

Mud Slabs for Bedrock Footing Subgrades (Conventional Spread Footings)

It is expected the bedrock bearing surface provided for footings may be non-uniform and can present difficulties to workers for erective temporary formwork and reinforcing steel for footings. Based on this, consideration could be given to providing a minimum 50 mm thick mud slab layer be placed over the prepared bedrock bearing medium once the bearing surface has been reviewed and approved by Paterson personnel.

This will provide a level surface for workers to construct foundations upon since it will provide a uniform surface over the angular surface that is expected to be present following detailed bedrock excavations. This is not a requirement to facilitate the bearing medium for geotechnical purposes, however, may provide a more practical working condition for foundation construction.

The mud slab is recommended to consist of a minimum 15 MPa (28-day compressive strength) concrete, extend a minimum of 150 mm beyond all faces of the overlying footing, and should not be placed until the bearing medium has been reviewed and approved at the time of construction by Paterson field personnel.

Compacted Granular Fill Working Platform (Deep Foundation)

Since the buildings will be supported on a deep foundation, the use of heavy equipment would be required to install piles (i.e., pile driving crane) or other deep foundation elements. It is conventional practice to install a compacted granular fill layer, at a convenient elevation, to allow the equipment to access the site without getting stuck and causing significant disturbance to the underlying soil.

It is recommended that a minimum 600 mm thick layer of OPSS Granular B Type II crushed stone or a combination of blast-rock and OPSS Granular B Type II crushed stone be placed as working platform throughout the building footprint which will support heavy equipment to facilitate deep foundation installations. The working pad granular should be compacted to a minimum of 98% of its standard Proctor maximum dry density (SPMDD) in maximum 300 mm thick lifts.

Once the piles have been driven and cut off, the working platform can be re-graded, and soil tracked in, or soil pumping up from the pile installation locations, can be bladed off and the surface can be topped up, if necessary, and re-compacted to act as the substrate for further fill placement for the slab structure.

5.3 Foundation Design

Bearing Resistance Values – Conventional Spread Footings (Building A)

Footings placed on surface sounded bedrock can be designed using the following bearing resistance values provided in Table 6 in the following page. A clean, surface-sounded bedrock bearing surface should be free of loose materials, and have no near surface seams, voids, fissures or open joints which can be detected from surface sounding with a rock hammer.

Table 6 - Bearing Resistance Values		
Bearing Surface	Bearing Resistance Values (kPa)	
	SLS	ULS
Granite Bedrock	-	4,000
Note: Bearing resistance values for footing design should be confirmed on a per building basis by the Paterson personnel at the time of construction.		

A geotechnical resistance factor of 0.5 was applied to the above-noted bearing resistance values at ULS. Footings bearing on an acceptable bedrock bearing surface and designed for the bearing resistance value provided herein will be subjected to negligible potential postconstruction total and differential settlements.

Lean-Concrete In-Filled Trenches

Where bedrock is encountered below the design underside of footing elevation and piles are not carried for that portion of the structure, consideration may be given to lowering the bearing surface to a suitable bedrock bearing medium by placing the footings on a lean-concrete in-filled trench extending to sound bedrock.

This may be required for portions of the strip footings extending between where the bedrock surface is deeper than the design founding elevation and pile foundation are not being advanced within close enough proximity to this location. Consideration may be given to either this option or adding piles to the design and as advised by the pile contractors structural design engineer.

Footings placed on a lean-concrete in-filled trench extending to weathered to sound bedrock bearing surface may be designed using a bearing resistance value of **4,000 kPa (ULS)**. This may be accomplished by excavating near-vertical trenches to expose the underlying bedrock surface and backfilling with lean concrete (minimum 15 MPa, 28-day compressive) to the design underside of footing level.

Typically, the excavation sidewalls will be used as the form to support the concrete. The additional width of the concrete poured against an undisturbed trench sidewall will suffice in providing a direct transfer of the footing load to the underlying bedrock. The trench excavation should be at least 300 mm wider than all sides of the footing at the base of the excavation. The excavation bottom should be relatively clean using the hydraulic shovel only (workers will not be permitted in the excavation below 1.5 m depth).

Once approved by Paterson, lean concrete can be poured up to the proposed founding elevation. The effectiveness of this operation will depend on the ability of maintaining vertical trenches until the lean concrete can be poured. It is suggested that once the bottom of the excavation is exposed, an assessment should be completed to determine the water infiltration and stability of the excavation sidewalls extending to the bedrock surface.

It is anticipated water will be perched upon the bedrock and within the overburden, and mostly within the glacial till layer. Where water infiltration cannot be controlled using open sumps within the excavation footprints, it is recommended to install a well point adjacent to excavation footprints to lower the water table in advance of sub-excavations, if required and as determined at the time of construction.

Deep Foundation – End Bearing Piles (All Buildings)

A deep foundation, such as end bearing piles, may be considered as foundation support for the proposed buildings. For deep foundations, concrete-filled steel pipe piles are generally utilized in the Ottawa area. Applicable pile resistance at SLS values and factored pile resistance at ULS values are given in Table 7. A resistance factor of 0.4 has been incorporated into the factored ULS values. Note that these are all geotechnical axial resistance values.

The geotechnical pile resistance values were estimated using the Hiley dynamic formula, to be confirmed during pile installation with a program of dynamic monitoring. For this project, the dynamic monitoring of two (2) to four (4) piles would be recommended and as undertaken and measured by Paterson at the time of pile testing. This is considered to be the minimum monitoring program, as the piles under shear walls may be required to be driven using the maximum recommended driving energy to achieve the greatest factored resistance at ULS values.

Re-striking of all piles, at least once, will also be required after at least 48 hours have elapsed since initial driving.

A full-time field review program should be conducted by Paterson field personnel during the pile driving operations to record the pile lengths, ensure that the refusal criteria is met and that piles are driven within the location tolerances (within 75 mm of proper location and within 2% of vertical).

Table 7 – Pile Foundation Design Data

Pile Outside Diameter (mm)	Pile Wall Thickness (mm)	Geotechnical Axial Resistance		Final Set (blows/ 12 mm)	Transferred Hammer Energy (kJ)
		SLS (kN)	Factored at ULS (kN)		
245	9	925	1,100	9	27
245	11	1,050	1,250	9	31
245	13	1,200	1,400	9	35

The minimum recommended centre-to-centre pile spacing is 3 times the pile diameter. The closer the piles are spaced, however, the more potential that the driving of subsequent piles in a group could have influence on piles in the group that have already been driven. These effects, primarily consisting of uplift of previously driven piles, are checked as part of the field review of the pile driving operations.

Prior to the commencement of production pile driving, a limited number of indicator piles should be installed across the site. It is recommended that each indicator pile be dynamically load tested to evaluate pile stresses, hammer efficiency, pile load transfer, and end-of-driving criteria for end-bearing in the bedrock.

Down Drag Loads

Due to the presence of the clay deposit below the subject site, and potential long-term degradation of organics within the clay deposit, down drag loads should be considered during the final design of the piles.

Based on the available subsurface information, it is expected that the piles will be driven through approximately 8 to 10 m of clay. Assigning an adhesion factor of 1.0 (as per the Canadian Foundation Engineering Manual), the clay can be taken to have an ultimate adhesion of 30 kPa against the sides of the piles.

The down drag load is effectively applied to each pile at the location of the “neutral plane,” where negative (i.e., down drag) skin friction becomes positive shaft resistance. In the case of the end-bearing piles at this site, the neutral plane will be located near the bedrock surface.

The down drag load is a structural pile capacity criterion and does not affect the geotechnical capacity of the piles. The structural axial capacity of the pile is governed by its structural strength at the neutral plane when subjected to the permanent load plus the down drag load.

Transient live load is not to be included. At or below the pile cap, the structural strength of the embedded pile is determined as a short column subjected to the permanent load plus the transient live load, but down drag load is to be excluded.

At the depth of the neutral plane where the down drag load is applied, the pile structure is well confined. The 5th edition of the Canadian Foundation Engineering Manual recommends that the allowable structural axial capacity of piles at the neutral plane, for resisting permanent load plus the down drag load, can be determined by applying a factor of safety of 1.5 to the pile material strength (steel yield and concrete 28-day compressive strength).

Settlement for Deep Foundations

Foundations supported by end-bearing piles terminating upon the bedrock surface herein will be subjected to negligible potential post-construction total and differential settlements.

Lateral Support

The bearing medium under footing-supported structures is required to be provided with adequate lateral support with respect to excavations and different foundation levels.

Above the groundwater level, adequate lateral support is provided to the in-situ bearing medium soils when a plane extending down and out from the bottom edge of the footing at a minimum of 1.5H:1V passes only through in situ soil. Adequate lateral support is provided to bedrock bearing medium when a plane extending down and out from the bottom edges of the footing at a minimum of 1H:6V (or flatter) passes only through sound bedrock or a material of the same or higher capacity as the bedrock, such as concrete. A heavily fractured, weathered bedrock and/or overburden bearing medium will require a lateral support zone of 1H:1V (or flatter).

Frictional Resistance

An unfactored coefficient of friction of 0.7 is considered applicable for the design of concrete footings supported on clean, surface sounded bedrock at this site.

Permissible Grade Raise Recommendations

Our current permissible grade raise recommendations for the proposed development are presented on Drawing PG7418-2 Permissible Grade Raise Plan in Appendix 2. If higher than permissible grade raises are required, preloading with or without a surcharge, lightweight fill, and/or other measures should be investigated to reduce the risks of unacceptable long-term post construction total and differential settlements.

5.4 Design for Earthquakes

Shear wave velocity testing was completed for the subject site to determine the applicable seismic site designation for the proposed buildings in accordance with Table 4.1.8.4.A of the Ontario Building Code 2024. The shear wave velocity testing was completed by Paterson personnel. The results of the shear wave velocity test are provided in Figures 2 and 3 in Appendix 2 of the present report.

Field Program

The seismic array was located as presented in Drawing PG7418-1 - Test Hole Location Plan attached to the present report. Paterson field personnel placed 24 horizontal 4.5 Hz geophones mounted to the surface by means of two 75 mm ground spike attached to the geophone land case. The geophones were spaced at 2 m intervals and were connected by a geophone spread cable to a Geode 24 Channel seismograph.

The seismograph was also connected to a laptop computer and a hammer trigger switch attached to a 12-pound dead blow hammer. The hammer trigger switch sends a start signal to the seismograph. The hammer is used to strike an I-Beam seated into the ground surface, which creates a polarized shear wave. The hammer shots are repeated between four (4) to eight (8) times at each shot location to improve signal to noise ratio.

The shot locations are also completed in forward and reverse directions (i.e.-striking both sides of the I-Beam seated parallel to the geophone array). The shot locations were 15.0, 10.0, 3.0 and -3.0 m away from the first and last geophone, and at the centre of the geophone array.

Data Processing and Interpretation

Interpretation of the shear wave velocity results was completed by Paterson personnel. Shear wave velocity measurement was made using reflection/refraction methods. The interpretation is performed by recovering arrival times from direct, reflected and refracted waves.

The interpretation is repeated at each shot location to provide an average shear wave velocity, V_{s30} , of the upper 30 m profile immediately below the proposed buildings foundation. The layer intercept times, velocities from different layers and critical distances are interpreted from the shear wave records to compute the bedrock depth at each location.

The bedrock velocity was interpreted using the main refractor wave velocity, which is considered a conservative estimate of the bedrock velocity due to the increasing quality of the bedrock with depth. It should be noted that as bedrock quality increases, the bedrock shear wave velocity also increases. Based on our testing results, the average overburden shear wave velocity is **165 m/s**, while the bedrock shear wave velocity is **2,664 m/s**.

For foundations placed directly or indirectly (i.e., using lean-concrete in-filled trenches) upon a clean, sounded bedrock surface, or entirely or partially on soil, the V_{s30} was calculated using the standard equation for average shear wave velocity calculation provided in the Ontario Building Code 2024, and as presented below, where in this case Layer 1 represents the overburden and Layer 2 depicts the bedrock.

$$V_{s30} = \frac{Depth_{of\ interest}(m)}{\left(\frac{Depth_{Layer1}(m)}{V_{sLayer1}(m/s)} + \frac{Depth_{Layer2}(m)}{V_{sLayer2}(m/s)} \right)}$$

Based on the results of the shear wave velocity testing, the Site Designation for the proposed buildings is described below.

Seismic Site Designation for Buildings A and B

Based on the geotechnical investigation, the bedrock surface within the proposed footprint of Building A and Building B has an elevation ranging approximately between 96.0 to 83.1 m and ground surface is at an approximate elevation of 95.7 m. Based on the above, it is anticipated that the bedrock surface will be located within 11.3 m of the founding depth.

Using the standard equation for average shear wave velocity calculation, the average shear wave velocity testing V_{s30} is 361 m/s for the proposed buildings at the subject site. Therefore, a **Site Designation X₃₆₁** would be applicable as per OBC 2024. It should be noted that the Seismic Site Designation should be reviewed by Paterson once the foundation design is available.

Seismic Site Designation for Building C

Based on the geotechnical investigation, the bedrock surface within the proposed footprint of Building C has an elevation ranging approximately between 93.0 to 88.0 m and ground surface is approximately 97.1 m

Using the standard equation for average shear wave velocity calculation, the average shear wave velocity testing V_{s30} is 476 m/s. Therefore, a **Site Designation X₄₇₆** is applicable as per OBC 2024.

The soils underlying the subject site are not susceptible to liquefaction or cyclic softening.

5.5 Basement Slab

With the removal of all topsoil and deleterious fill within the footprint of the proposed building, the in-situ soil and/or bedrock surfaces will be considered an acceptable subgrade upon which to commence backfilling for basement slab construction.

The recommended pavement structures noted in Subsection 5.7 will be applicable for the founding level of the proposed parking garage structure. However, if storage or other uses of the lower level involve the construction of a concrete floor slab, the upper 200 mm of sub-slab fill should consist of OPSS Granular A. All backfill material within the footprint of the proposed building should be placed in maximum 300 mm thick loose layers and compacted to at least 98% of its SPMDD. Any soft areas should be removed and backfilled with appropriate backfill material. OPSS Granular B Type II, with a maximum particle size of 50 mm, are recommended for backfilling below the floor slab.

A sub-slab drainage system, consisting of lines of perforated drainage pipe subdrains connected to a positive outlet, should be provided under the lowest level floor slab where a basement level is provided. The spacing of the sub-slab drainage pipes should be advised by Paterson during the design phase and once the footing and sump pit locations are known. The footprint would be confirmed at the time of construction once groundwater infiltration can be best assessed, if any. This is discussed further in Subsection 6.1.

5.6 Basement Wall

There are several combinations of backfill materials and retained soils that could be applicable for the basement walls of the subject structure. However, the conditions can be well-represented by assuming the retained soil consists of a material with an angle of internal friction of 30 degrees and a bulk (drained) unit weight of 18 kN/m³. However, undrained conditions are anticipated (i.e. below the groundwater level). Therefore, the applicable effective (undrained) unit weight of the retained soil can be taken as 11 kN/m³, where applicable. A hydrostatic pressure should be added to the total static earth pressure when using the effective unit weight.

Below the bedrock surface, a nominal coefficient for at-rest earth pressure of 0.05 is recommended in conjunction with a bulk unit weight of 24.5 kN/m^3 (effective 15.5 kN/m^3). A seismic earth pressure component will not be applicable for the foundation wall, which is to be poured against the bedrock face. It is expected that the seismic earth pressure will be transferred to the underground floor slab, which should be designed to accommodate these pressures.

A hydrostatic pressure should be added for the portion below groundwater level.

The total earth pressure (P_{AE}) includes the static earth pressure component (P_o) and the seismic component (ΔP_{AE}).

Lateral Earth Pressures

The static horizontal earth pressure (P_o) can be calculated using a triangular earth pressure distribution equal to $K_o \cdot \gamma \cdot H$ where:

K_o = at-rest earth pressure coefficient of the applicable retained soil (0.5)
 γ = unit weight of fill of the applicable retained soil (kN/m^3)
 H = height of the wall (m)

An additional pressure having a magnitude equal to $K_o \cdot q$ and acting on the entire height of the wall should be added to the above diagram for any surcharge loading, q (kPa), that may be placed at ground surface adjacent to the wall.

The surcharge pressure will only be applicable for static analyses and should not be used in conjunction with the seismic loading case. Actual earth pressures could be higher than the “at-rest” case if care is not exercised during the compaction of the backfill materials to maintain a minimum separation of 0.3 m from the walls with the compaction equipment.

Seismic Earth Pressures

The total seismic force (P_{AE}) includes both the earth force component (P_o) and the seismic component (ΔP_{AE}). The seismic earth force (ΔP_{AE}) can be calculated using $0.375 \cdot a_c \cdot \gamma \cdot H^2 / g$ where:

$a_c = (1.45 - a_{\max} / g) a_{\max}$
 γ = unit weight of fill of the applicable retained soil (kN/m^3)
 H = height of the wall (m)
 g = gravity, 9.81 m/s^2

The peak ground acceleration, ($a_{\max}$), for the subject site may be found in the latest revision of the Ontario Building Code. Note that the vertical seismic coefficient is assumed to be zero.

The earth force component (P_o) under seismic conditions can be calculated using $P_o = 0.5 K_o \gamma H^2$, where $K_o = 0.5$ for the soil conditions noted above.

The total earth force (P_{AE}) is considered to act at a height, h (m), from the base of the wall, where:

$$h = \{P_o \cdot (H/3) + \Delta P_{AE} \cdot (0.6 \cdot H)\} / P_{AE}$$

The earth forces calculated are unfactored. For the ULS case, the earth loads should be factored as live loads, as per the OBC 2024.

5.7 Pavement Design

Pavement Structure Over Overburden

For design purposes, the pavement structures presented in Tables 8, 9 and 10 below are recommended for the design of car only parking, local residential roadways, and rigid pavement. It should be understood the pavement structures provided in Tables 8, 9 and 10 are not intended for construction truck traffic without requiring additional measures to prepare the base and subbase layers for the placement of asphalt. This is discussed further in this subsection of the report.

Table 8 – Recommended Pavement Structure – Car Only Parking Areas	
Thickness (mm)	Material Description
50	Wear Course - HL 3 or Superpave 12.5 Asphaltic Concrete
150	BASE - OPSS Granular A Crushed Stone
300	SUBBASE - OPSS Granular B Type II
SUBGRADE - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil.	

Table 9 – Recommended Pavement Structure – Local Residential Roadways, Access Lanes and Heavy Truck Parking Areas	
Thickness (mm)	Material Description
40	Wear Course - HL-3 or Superpave 12.5 Asphaltic Concrete
50	Binder Course - HL-8 or Superpave 19.0 Asphaltic Concrete
150	BASE - OPSS Granular A Crushed Stone
400	SUBBASE - OPSS Granular B Type II
SUBGRADE - Either fill, in situ soil, or OPSS Granular B Type I or II material placed over in situ soil.	

Table 10 – Recommended Rigid Pavement Structure – Lower Parking Level	
Thickness (mm)	Material Description
Specified by Others	32 MPa Concrete
200	BASE - OPSS Granular A Crushed Stone
SUBGRADE - Either fill, in situ soil, or OPSS Granular B Type I or II material placed over in situ soil.	

Minimum Performance Graded (PG) 58-34 asphalt cement should be used for this project. For residential driveways and car-only parking areas, an Ontario Traffic Category A will be used. For local roadways, an Ontario Traffic Category B should be used for design purposes.

If soft spots develop in the subgrade during compaction or due to construction traffic, the affected areas should be excavated and replaced with OPSS Granular B Type II material. Weak subgrade conditions may be experienced over service trench fill materials. This may require the use of geotextile, thicker subbase or other measures that can be recommended at the time of construction as part of the field observation program and is discussed further in the following portion of this report.

The pavement granular base and subbase should be placed in maximum 300 mm thick lifts and compacted to a minimum of 100% of the material's SPMDD using suitable compaction equipment., noting that excessive compaction can result in subgrade softening.

Pavement Structure Over Bedrock

If bedrock is encountered at the subgrade level, the total thickness of the pavement granular materials (base and subbase) may be reduced to 300 mm for the above-noted pavement structures. The bedrock surface should be reviewed and approved by Paterson prior to placing the base and subbase materials. Care should be exercised during the bedrock removal program to ensure that the bedrock subgrade does not have depressions that will trap water, as this could impact the service life of the pavement structure.

Temporary Access Roads and Construction Traffic

Paterson anticipates that the earthworks contractor will require several haul roads, staging areas and other temporary access lanes to facilitate construction traffic. Paterson also anticipates construction traffic will be directed over unpaved access paths constructed using the base and subbase layers identified in the above-noted tables and will be used throughout the duration of the construction phase.

Omitting the asphalt layer, the above-noted pavement designs are not considered suitable to support temporary construction traffic without requiring additional measures to remediate the proposed base and subbase layers to accommodate the placement of asphalt to complete the pavement design.

Therefore, provisions should be carried to either reinstate temporary construction access and haul roads prior to placing asphalt or improve the durability of the temporary unpaved construction access and haul roads to minimize additional efforts for preparing the base course for the placement of asphalt once construction traffic would no longer be required.

Examples of scenarios that would require these provisions would consist of areas which construction traffic results in rutting and compromising subgrade soils, placement of subbase layers directly over subgrade shortly following periods of spring thaw, snowmelt and rainfall events or over service trenches that may consist of poorly compacted backfill.

For planning purposes, temporary construction haul roads and working pads should be planned to be 600 mm of crushed stone consisting of a 500 mm of a combination of OPSS Granular B Type I or Type II crushed stone and/or blast-rock covered with a minimum 50 to 100 mm thick layer of OPSS Granular B Type II or OPSS Granular A crushed stone (to provide suitable surface for vehicle tires) over a Paterson-reviewed and -approved subgrade.

These types of roads should also be underlain by a non-woven geotextile layer, such as Terraifix 200R, where they would be integrated into the final pavement structure and accommodate the placement of asphalt to minimize pumping of fines into the subbase layer. Cow-pathing site-generated soil may also be considered to provide suitable haul and access roads.

Temporary access roads that will not support heavy truck traffic (i.e., conventional light-duty vehicles only) may be prepared using a minimum of 150 mm of OPSS Granular A and 400 mm of OPSS Granular B Type II crushed stone.

However, provisions should be carried to provide a non-woven geotextile separation layer, such as Terraifix 200R, over the subgrade soils to lessen the amount of fines that migrate into the subbase layers in response to a combination of construction traffic and seasonal fluctuations in the subgrades performance. Provisions should also be carried to scarify and replace the upper 100 to 150 mm of these areas with clean OPSS Granular A crushed stone prior to placing asphalt.

Provisions should also be carried by the earthworks contractor to suitably compact trench backfill placed over services when reinstating servicing trenches below areas proposed to support paved areas. Since it is anticipated this material would consist of workable brown silty clay or silty sand fill (and not wet, non-workable grey silty clay) it would be recommended to place this material in maximum 400 mm thick loose lifts compacted using a suitably sized vibratory sheepfoot roller making several passes under the supervision of Paterson field personnel.

The subgrade surface is also recommended to be provided with a layer of bi-axial geogrid, such as Terrafix TBX2500, to improve the stiffness of the reinstated trench backfill subgrade for supporting the final pavement structures.

These efforts would be reviewed, approved and advised upon by Paterson field staff during the construction program. Further, Paterson should review design, tender and construction documents associated with temporary and permanent pavement design throughout those phases of the project.

Pavement Structure Drainage

Satisfactory performance of the pavement structure is largely dependent on the contact zone between the subgrade material and the base stone in a dry condition. Failure to provide adequate drainage under conditions of heavy wheel loading can result in the fine subgrade soil being pumped into the voids in the stone subbase, thereby reducing load carrying capacity.

Where silty clay is anticipated at the pavement subgrade level, consideration should be given to installing subdrains during the pavement construction. The subdrain inverts should be approximately 300 mm below subgrade level, and the subgrade surface should be crowned to promote water flow to the drainage lines.

Off-Site Road Cut Service Trench Pavement Design

It is understood off-site services within the Terry Fox Drive right-of-way will be extended to the subject site and require additional excavation of the existing roadway and associated reinstatement upon completion of the sewer installation.

Based on Paterson's review of the Transportation Impact Assessment completed by Dillon (25-9532 dated October 2025), the subject sections of Terry Fox Drive is characterized as a major collector road and considered a Traffic Category D level of service (LOS) for transit.

Based on this, the following pavement design is recommended to be reinstated throughout the proposed roadcut:

Table 11 – Recommended Flexible Pavement Structure for Terry Fox Drive Reinstatement	
Thickness (mm)	Material Description
40	Wear Course - Superpave 12.5 Asphaltic Concrete
50	Upper Binder Course - Superpave 19.0 Asphaltic Concrete
50	Lower Binder Course - Superpave 19.0 Asphaltic Concrete
150	BASE - OPSS Granular A Crushed Stone
600	SUBBASE - OPSS Granular B Type II
SUBGRADE - Either fill, in situ soil, or OPSS Granular B Type I or II material placed over in situ soil.	

Minimum Performance Graded (PG) 64-34 asphalt cement should be used for this purpose. Cement asphalt should be compacted to a minimum average density of 93% and no more than 98%. The pavement granular base and subbase should be placed in maximum 300 mm thick lifts and compacted to a minimum of 100% of the material's SPMDD using suitable compaction equipment.

If soft spots develop in the subgrade during compaction or due to construction traffic, the affected areas should be excavated and replaced with OPSS Granular B Type II material.

All reinstatement efforts must be undertaken in accordance with the City of Ottawa's *Standard Detail R10 – Standard Trench Reinstatement in Paved Surface* dated March 2023 and other pertinent details, specifications and requirements identified by the City of Ottawa.

All subgrade fill is recommended to be placed in 300 mm maximum thick loose lifts and compacted to a minimum of 95% of the materials SPMDD (or as otherwise advised by the City of Ottawa) and reviewed and approved by Paterson personnel at the time of construction.

All reinstatement efforts are recommended to be reviewed and approved by Paterson at the time of construction.

6.0 Design and Construction Precautions

6.1 Foundation Drainage and Backfill

Perimeter Foundation Drainage System

It is recommended that a perimeter foundation drainage system be provided for the proposed structures. The system should consist of a 100 to 150 mm diameter perforated corrugated plastic pipe, surrounded on all sides by a minimum of 150 mm of 19 mm clear crushed stone, placed at the footing level around the exterior perimeter of the structures where double-sided pours will be undertaken. In areas where blind-sided pours will be considered, the perimeter drainage pipe should be placed along the interior side of the foundation wall and connected to sleeves placed within the foundation wall at a 6 m center-to-center spacing. The pipe should have a positive outlet, such as a gravity connection to the storm sewer.

It is anticipated that underfloor drainage will be required to provide an outlet for water captured by the buildings drainage system since it is assumed external gravity outlets will not be able to be accommodated by the sewer design. The layout of the perimeter and underfloor drainage systems should be determined by Paterson during the design phase once the foundation structure and sump pit locations are known. The perimeter drainage pipe would connect to a series of underfloor drainage lines which would direct water to sump pit(s) within the lower basement area.

A positive-side (i.e., placed on exterior faces) waterproofing system should also be provided for any elevator shafts and pools located within the lowest basement level. A continuous PVC waterstop should be installed within the interface between the concrete base slab below the elevator shaft foundation walls. It is recommended that Paterson review and advise on all basement waterproofing/drainage system designs during the design phase.

Foundation Backfill

Backfill against the exterior sides of the foundation walls should consist of free-draining, non-frost susceptible granular materials. The greater part of the site excavated materials will be frost susceptible and, as such, are not recommended for re-use as backfill against the foundation walls unless used in conjunction with a composite drainage system, such as CCW MiraDRAIN 2000 or Delta-Teraxx or an approved equivalent. Imported granular materials, such as clean sand or OPSS Granular B Type I granular material, should otherwise be used for this purpose.

Sidewalks and Walkways

Backfill material below sidewalk and walkway subgrade areas or other settlement sensitive structures which are not adjacent to the buildings should consist of free-draining, non-frost susceptible material. This material should be placed in maximum 300 mm thick loose lifts and compacted to at least 98% of its SPMDD under dry and above freezing conditions.

Finalized Drainage and Waterproofing Design

Paterson should be provided with the finalized or current structural and architectural drawings for the proposed buildings to provide specific waterproofing and drainage design recommendations for design and tender. The design will provide recommendations for other items such as minimum pipe spacings, pipe mechanical connections below grade, transitioning from blind to double sided pours (if applicable), etc.

6.2 Protection of Footings Against Frost Action

Perimeter footings, pile caps and grade beams of heated structures are required to be insulated against the deleterious effects of frost action. A minimum 1.5 m thick soil cover (or insulation equivalent) should be provided in this regard.

Other exterior unheated footings, such as those for isolated exterior piers, are more prone to deleterious movement associated with frost action than the exterior walls of the proper structure. These footings should be provided with a minimum 2.1 m thick soil cover (or insulation equivalent).

6.3 Excavation Side Slopes

City of Ottawa Right-of-Way

Based on the existing topographic information and proposed founding elevations identified on the civil design drawings, the building excavations are not anticipated to extend beyond the property boundaries. However, the earthworks contractor is responsible for confirming the anticipated footprint of the building excavation as part of the permitting process.

Should the excavation footprint be determined to extend beyond the subject site and onto the City of Ottawa's Right-of-Way, or, require the use of temporary shoring systems (also determined by and the responsibility of the earthworks contractor during the preconstruction phase) retained by tiebacks extending into the City of Ottawa's Right-of-Way, the City's encroachment approvals process must be followed for permitting those works beyond the subject site.

Unsupported Excavations

The temporary excavation side slopes anticipated should either be excavated to acceptable slopes or retained by shoring systems from the beginning of the excavation until the structure is backfilled.

Excavation side slopes above the groundwater level extending to a maximum vertical height of 3 m should be cut back at 1H:1V or flatter. The flatter slope is required for excavation below groundwater level. The subsurface soil is considered to be mainly a Type 2 and Type 3 soil according to the Occupational Health and Safety Act and Regulations for Construction Projects.

In sound bedrock, almost vertical side slopes can be constructed, provided all weathered and loose rock is removed or stabilized with rock anchors or other means determined by Paterson at the time of construction. A minimum of 1 m horizontal ledge should remain between the unsupported excavation and bedrock surface.

Excavated soil should not be stockpiled directly at the top of excavations and heavy equipment should be kept away from the excavation sides. Slopes in excess of 3 m in height should be periodically inspected by Paterson in order to detect if the slopes are exhibiting signs of distress.

Excavation side slopes around the building excavation should be protected from erosion by surface water and rainfall events by the use of secured tarpaulins spanning the length of the side slopes, or other means of erosion protection along their footprint. The tarps should be anchored with stakes embedded a minimum of 600 mm below existing grade at the top of the excavation and on a maximum spacing of 2 m centres.

Soil stockpiles, debris, and other forms of weight should not be considered for the purpose of securing the tarpaulins along the top of the slope. However, consideration may be given to restraining the tarpaulins with soil, sandbags, stone, etc. along the bottom of the side-slope. The tarpaulins should extend beyond the overburden and onto the bedrock surface.

Temporary Shoring

Temporary shoring may be required for the overburden soil to complete the required excavations where insufficient room is available for open cut methods. The shoring requirements designed by a structural engineer specializing in those works will depend on the depth of the excavation, the proximity of the adjacent structures and the elevation of the adjacent building foundations and underground services. The applicability, design and implementation of these temporary systems will be the responsibility of the excavation contractor and their design team.

Inspections and approval of the temporary system will also be the responsibility of the designer. Geotechnical information provided below is to assist the designer in completing a suitable and safe shoring system. The designer should take into account the impact of a significant precipitation event and designate design measures to ensure that a precipitation will not negatively impact the shoring system or soils supported by the system. Any changes to the approved shoring design system should be reported immediately to the owner's structural design prior to implementation.

The temporary system could consist of soldier pile and lagging system or interlocking steel sheet piling. Any additional loading due to street traffic, construction equipment, adjacent structures, and facilities, etc., should be included to the earth pressures described below. These systems could be cantilevered, anchored, or braced. Generally, it is expected that the shoring systems will be provided with tie-back rock anchors to ensure their stability.

The shoring system is recommended to be adequately supported to resist toe failure and inspected to ensure that the shoring wall extend well below the excavation base. It should be noted if consideration is being given to utilizing a raker style support for the shoring system that lateral movements can occur, and the structural engineer should ensure that the design selected minimizes these movements to tolerable levels.

The earth pressures acting on the shoring system may be calculated using the parameters provided in Table 12.

Table 12 - Soil Parameters for Calculating Earth Pressures Acting on Shoring System	
Parameter	Value
Active Earth Pressure Coefficient (K_a)	0.33
Passive Earth Pressure Coefficient (K_p)	3
At-Rest Earth Pressure Coefficient (K_o)	0.5
Unit Weight (γ), kN/m ³	20
Submerged Unit Weight (γ'), kN/m ³	13

The active earth pressure should be calculated where wall movements are permissible while the at-rest pressure should be calculated if no movement is permissible. The dry unit weight should be calculated above the groundwater level while the effective unit weight should be calculated below the groundwater level. The hydrostatic groundwater pressure should be included to the earth pressure distribution wherever the effective unit weight is calculated for earth pressures. If the groundwater level is lowered, the dry unit weight for the soil should be calculated full weight, with no hydrostatic groundwater pressure component.

For design purposes, the minimum factor of safety of 1.5 should be calculated.

6.4 Pipe Bedding and Backfill

Bedding and backfill materials should be in accordance with the most recent Material Specifications & Standard Detail Drawings from the Department of Public Works and Services, Infrastructure Services Branch of the City of Ottawa.

A minimum of 150 mm of OPSS Granular A should be placed for bedding for sewer or water pipes when placed on soil subgrade. If the bedding is placed on grey clay or bedrock, the thickness of the bedding should be increased to 300 mm for sewer pipes.

The bedding should extend to the spring line of the pipe. Cover material, from the spring line to a minimum of 300 mm above the obvert of the pipe should consist of OPSS Granular A crushed stone. The bedding and cover materials should be placed in maximum 225 mm thick lifts and compacted to 99% of the SPMDD.

Where hard surface areas are considered above the trench backfill, the trench backfill material within the frost zone (about 1.8 m below finished grade) should match the soils exposed at the trench walls to reduce the potential differential frost heaving. The trench backfill should be placed in maximum 300 mm thick loose lifts and compacted to a minimum of 95% of the SPMDD.

Bedrock/Soil Transitions

In areas where the service subgrade transitions from soil to bedrock, it is recommended that the founding medium be inspected in the field to determine how steeply the bedrock surface, where encountered, drops off. A transition treatment is generally recommended to be provided where the bedrock slopes steeper than 3H:1V.

At these locations, the bedrock should be excavated, and a minimum 500 mm thick layer of bedding, such as OPSS Granular A crushed stone, be placed to provide a 3H:1V transition from the bedrock subgrade toward the soil subgrade. This treatment will reduce the propensity for bending stresses to occur in the service pipe alignments.

It is recommended that this condition be reviewed in the field by Paterson personnel at the time of excavation and construction of site services. Paterson field personnel may advise on appropriate treatments where pipe subgrade transition between soil and bedrock surfaces.

Glacial Till to Clay Deposit Transitions

In areas where site servicing trenches advance across transitions between relatively shallow deposits of glacial till (shallow relative to bedrock surface) and deeper deposits of clay, glacial till soils consisting of predominantly fine-grained fines matrixes and high in-situ moisture levels will be difficult to place bedding materials upon. It is expected these soils will be in a relatively loose state of compactness and be readily disturbed by vibrations induced by compaction equipment. It would be expected that satisfactory dewatering efforts would be undertaken ahead of the trenching works to ensure efforts may be undertaken in the dry.

It is recommended that provisions be carried to provide localized bedding layers that may exceed 150 to 300 mm (i.e., in the range of 500 mm to 1 m and potentially higher) to place the bedding material upon compact to dense glacial till soils that would underlie the shallower looser material. Thickened bedding layers would be recommended to consist of OPSS Granular B Type I or II crushed stone and/or suitably fragmented and -sized blast rock, if available. During the detailed design phase, Paterson will review all site servicing drawings to identify areas where the above-noted transition zone treatment would be expected to be considered.

Backfilling Within Trench Boxes

When the bedding and cover material is placed within the confines of a trench box and steel plates, it is recommended that the trench box be placed tightly against the outside of the trench walls and remains approximately 300 mm above the obvert level of the service pipe. The vertical excavation sidewalls within the lower portion of the trench (below the obvert level of the pipe) can be supported using steel plates extended down to the bottom of the trench. The steel plates can be extended below the base of the excavation to prevent basal heave, in conjunction with adequate dewatering measures when located below the groundwater table.

To minimize the potential for disturbance of the bedding and cover material and subsequent settlement of the service pipe during the removal of the steel plates, it is recommended that the bedding layer be re-compacted tightly against the trench sidewalls upon removal/lifting of the steel plate up to the top of the bedding layer and prior to placing the pipe. This is recommended to mitigate settlement of the pipe that would results from removing the plates without re-compacting the fill that would be left unconfined to the sides of the trench. This procedure would be repeated for the springling and cover layers until the steel plates are removed.

It is generally recommended that this procedure be reviewed by Paterson field personnel at the time of construction.

6.5 Groundwater Control

Groundwater Control for Building Construction

It is anticipated that surface water infiltration into the excavations undertaken above the groundwater table should be manageable through the sides of the excavation and controllable using open sumps. It is further anticipated that groundwater infiltration into the excavations may be moderate to high throughout the overburden located below the groundwater table and/or bedrock surface.

Further, bedrock removal can lead to increased fracturing (hydraulic pathways), resulting in highly variable groundwater conditions. The contractor should be prepared to direct water away from all bearing surfaces and subgrades, regardless of the source, to prevent disturbance to the founding medium.

It is recommended that Paterson review detailed design drawings and construction timelines associated with excavation works prior to tendering the earthworks portion of the project. It is recommended that Paterson review and advise at that time if additional recommendations are required with regards to planning temporary dewatering and groundwater management efforts during the construction phase.

Permit to Take Water

Under the current regulations enacted by the Ministry of Environment, Conservation and Parks (MECP), any dewatering in excess of 50,000 L/day requires a registration on the Environmental Activity and Sector Registry (EASR), so long as that dewatering is related to construction. If the dewatering is not related to construction, a Permit to Take Water obtained from the MECP will be required.

In the event that an EASR is required to facilitate dewatering of the proposed development, a minimum of three to four weeks should be allotted for completion of the EASR registration and the Water Taking and Discharge Plan, to be prepared by a Qualified Person as stipulated under O.Reg. 63/16. Should a Permit to Take Water be required, a minimum of five to six months should be allotted for completion of the permit, due to the minimum review period imposed by the MECP.

Impact to Neighboring Properties

Based on the proposed grading and design details, the proposed structures will be founded within very stiff, brown silty clay and sound bedrock layers and above layers sensitive to long-term dewatering, such as the grey silty clay layer.

Since the structures will be founded within subsoils that have low hydraulic conductivity, the zone of influence of dewatering by the proposed structures is limited to the area directly beyond the proposed structures and within the boundaries of the subject site. This information assumes fully saturated soils (i.e., groundwater table at ground surface) and the hydraulic conductivity testing results undertaken during the field investigation stage.

Based on this, there are no negative impacts due to long-term dewatering that are anticipated to occur to neighboring structures and infrastructure as a result of the construction of the proposed structures from a geotechnical perspective.

6.6 Winter Construction

Precautions must be taken if winter construction is considered for this project.

Where excavations are completed in proximity to existing structures which may be adversely affected due to the freezing conditions. The subsurface conditions mostly consist of frost susceptible materials. In the presence of water and freezing conditions, ice could form within the soil mass. Heaving and settlement upon thawing could occur. In particular, where a shoring system is constructed, the soil behind the shoring system will be subjected to freezing conditions and could result in heaving of the structure(s) placed within or above frozen soil. Provisions should be made in the contract documents to protect the walls of the excavations from freezing, if and where applicable.

In the event of construction during below zero temperatures, the founding stratum should be protected from freezing temperatures by the installation of straw, propane heaters and/or glycol lines and tarpaulins or other suitable means. The base of the excavations should be insulated from sub-zero temperatures immediately upon exposure and until such time as heat is adequately supplied to the building and the foundation is protected with sufficient soil cover to prevent freezing at founding level.

Trench excavations, foundation construction and pavement construction are difficult activities to complete during freezing conditions without introducing frost in the subgrade or in the excavation walls and bottoms. Precautions should be considered if such activities are to be completed during freezing conditions. Additional information could be provided, if required.

Under winter conditions, if snow and ice are present within imported fill below future basement slabs, then settlement of the fill should be expected and support of a future basement slab and/or temporary supports for slab pours will be negatively impacted and could undergo settlement during spring and summer time conditions.

Paterson should complete periodic inspections during fill placement to ensure that snow and ice quantities are minimized in settlement-sensitive areas.

6.7 Corrosion Potential and Sulphate

The results of analytical testing show that the sulphate content is less than 0.1%. This result is indicative that Type 10 Portland cement (normal cement) would be appropriate for this site. The pH of the sample indicates that it is not a significant factor in creating a corrosive environment for exposed ferrous metals at this site, whereas the chloride content and resistivity is indicative of an aggressive corrosive environment.

6.8 Landscaping Considerations

Retaining Walls and Garage Ramp Foundation Walls

It is understood that a retaining wall is expected to be constructed along the eastern property boundary of the subject site as part of the proposed development, as well as entrance ramp foundation walls to the building garages.

It should be noted that proposed retaining walls should be designed by a Licensed Professional Engineer in the Province of Ontario and should be subject to a conforming global stability analysis. The foundation walls will be designed by a licensed structural engineer and should be designed using the earth pressure parameters provided in the following sections.

All sections of the retaining wall(s) should be designed so that their internal and external failure modes comply with CHBD requirements. Furthermore, any proposed retaining wall should be designed to maintain an adequate factor of safety greater than 1.5 under static loading conditions and greater than 1.1 under seismic loading conditions.

The applicable seismic design should incorporate Peak Ground Acceleration (PGA) for the Ottawa area as per the latest Ontario Building Code.

It is also required that the bearing medium of the proposed wall be reviewed by Paterson field personnel at the time of excavation and prior to placement of the granular bedding layer. Based on the results of the geotechnical investigation, it is anticipated that the walls will be founded over an engineered fill pad or undisturbed, in-situ soil bearing surfaces.

The soil parameters presented in Table 13 can be used in the design of the retaining walls.

Table 13 – Soil Parameters for Global Stability Analysis				
Soil Layer	Unit Weight (kN/m³)	Friction Angle (°)	Effective Cohesion (kPa)	Total Cohesion (kPa)
Brown Silty Clay	17	33	5	80
Grey Silty Clay	16	33	10	40
Glacial Till	19	35	0	0

It is recommended that a 100 mm diameter perforated corrugated plastic pipe with geosock, surrounded by 150 mm of 19 mm clear crushed stone on all sides, be placed behind the heel of the wall. The pipe should have a positive outlet, either in front of, below, or to the side of the wall, towards a natural slope or drainage system.

Backfill Materials

Retaining walls should be backfilled with free-draining granular material, as Granular A or Granular B Type II materials. Longitudinal drains and outlets should also be incorporated to ensure proper drainage of the backfill material.

It is further recommended that backfill material be placed within a wedge-shaped area defined by a line drawn from below the rear edge of the wall's base block at a slope of 1H:1V, or a minimum of 1 m behind the rear of the blocks. All material must be compacted to a minimum of 98% of the materials SPMDD.

Geotechnical parameters of the proposed free draining backfill material to be used at the subject site are provided in Table 14 for design purposes.

Table 14 – Geotechnical Parameters for Backfill Material							
Material Description	Unit Weight (kN/m³)		Friction Angle (°) ϕ'	Friction Factor, $\tan \delta$	Lateral Earth Pressure Coefficients		
	Drained γ_{dry}	Effective γ			Active K_a	At Rest K_o	Passive K_p
Granular A (Crushed Stone)	22	13.5	38	0.6	0.24	0.38	4.20
Granular B Type II (Crushed Stone)	22	13.5	40	0.6	0.22	0.36	4.60

Lateral Earth Pressure

It is recommended that a minimum of 1 m of backfill material consisting of clean, imported crushed stone as Granular A or Granular B Type II. The soil parameters shown in Table 13 and Table 14 above should be used for retaining wall design.

Tree Planting Considerations

There are no specific tree planting setbacks applicable to proposed retaining walls. However, the retaining wall designer should consider both the additional loads applied from trees in close proximity to the top and bottom of the proposed retaining walls, as well as the implementation of root barriers to protect the retaining wall systems to resist pressures exerted by root systems.

Trees located in front of the wall may be accommodated by thickened and reinforced bedding layers where clay soils may be present at the founding depth of the proposed retaining wall bedding layer and as deemed suitable by the designer. Paterson may assist with this portion during the design as required.

Global Stability Verification

Paterson has reviewed the currently proposed retaining wall footprint (Grading Plan Drawings - Revision 4 dated October 28, 2025, prepared by D.B. Gray Engineering Inc.) from a global stability perspective. The analysis of the stability of the slope was carried out using SLIDE, a computer program which permits a two-dimensional slope stability analysis using several methods including the Bishop's method, which is a widely used and accepted analysis method.

The program calculates a factor of safety, which represents the ratio of the forces resisting failure to those favoring failure. Theoretically, a factor of safety of 1.0 represents a condition where the slope is stable. However, due to intrinsic limitations of the calculation methods and the variability of the subsoil and groundwater conditions, a factor of safety greater than one is usually required to ascertain that the risks of failure are acceptable. A minimum factor of safety of 1.5 is generally recommended for conditions where the failure of the slope would endanger permanent structures.

Subsoil conditions at the cross-sections were inferred based on the boreholes completed throughout the subject site and general knowledge of the geology of the area. For a conservative review of the groundwater conditions, the silty clay deposit was considered to be fully saturated for our analysis. The effective and total strength soil parameters used for static and seismic analyses, respectively, are presented in Table 13.

The results are shown in Figures 1A and 1B in Appendix 2. The results indicate a slope with factors of safety exceeding 1.5 and 1.1 for static and seismic loading conditions, respectively, for the highest proposed segment of the proposed retaining wall structure. *Figure 4 – Typical Retaining Wall Cross Section* is provided in Appendix 2 of this report for further information summarizing the anticipated construction of the proposed retaining wall structure.

These results indicate the proposed retaining wall structure will be able to designed and constructed feasibly from a geotechnical perspective. It should be understood this assessment and associated typical detail are not considered suitable for construction or equivalent to a detailed design and are only for discussion purposes. The proposed retaining wall structure will be required to be designed as indicated in the above-noted sections of this Geotechnical Report at a later stage of design.

Tree Planting Considerations

Since the proposed structures will be supported by foundations deriving support by non-cohesive deposits and formations, there are no applicable tree planting setback restrictions for the proposed buildings from a geotechnical perspective.

6.9 Low-Impact Development Considerations

Due to the poor hydraulic properties of in-situ silty clay soils and generally shallow bedrock topography, infiltration-type LID practices are not considered suitable for the subject site.

7.0 Recommendations

It is recommended that the following be carried out by Paterson once preliminary and future details of the proposed development have been prepared:

- ☐ Review preliminary and detailed grading, servicing, landscaping and structural plan(s) from a geotechnical perspective.
- ☐ Review Seismic Site Designation from a geotechnical perspective.
- ☐ Review of the geotechnical aspects of the excavation contractor's shoring design, if not designed by Paterson, prior to construction, if applicable.

It is a requirement for the foundation design data provided herein to be applicable that a material testing and observation program be performed by the geotechnical consultant. The following aspects of the program should be performed by Paterson:

- ☐ Observation of all waterproofing membranes, sub-slab drainage system and all associated systems and assemblies.
- ☐ Observation of all bearing surfaces prior to the placement of concrete.
- ☐ Sampling and testing of the concrete and fill materials.
- ☐ Periodic observation of the condition of unsupported excavation side slopes in excess of 3 m in height, if applicable.
- ☐ Observation of all subgrades prior to backfilling and follow-up field density tests to determine the level of compaction achieved.
- ☐ Field density tests to determine the level of compaction achieved.
- ☐ Sampling and testing of the bituminous concrete including mix design reviews.

A report confirming that these works have been conducted in general accordance with our recommendations could be issued upon the completion of a satisfactory inspection program by the geotechnical consultant.

All excess soil must be handled as per *Ontario Regulation 406/19: On-Site and Excess Soil Management*.

8.0 Statement of Limitations

The recommendations provided are in accordance with the present understanding of the project. Paterson requests permission to review the recommendations when the drawings and specifications are completed.

A soils investigation is a limited sampling of a site. Should any conditions at the site be encountered which differ from those at the test locations, Paterson requests immediate notification to permit reassessment of our recommendations.

The recommendations provided herein should only be used by the design professionals associated with this project. They are not intended for contractors bidding on or undertaking the work. The latter should evaluate the factual information provided in this report and determine the suitability and completeness for their intended construction schedule and methods. Additional testing may be required for their purposes.

The present report applies only to the project described in this document. Use of this report for purposes other than those described herein or by person(s) other than Ironclad Developments Inc., or their agents, is not authorized without review by Paterson for the applicability of our recommendations to the alternative use of the report.

Paterson Group Inc.



Nicholas F. R. Versolato, CPI, B.Eng.



Drew Petahtegoose, P.Eng.



Report Distribution:

- ☐ Ironclad Developments Inc. (Email Copy)
- ☐ Paterson Group (1 Copy)

APPENDIX 1

SOIL PROFILE AND TEST DATA SHEETS

SYMBOLS AND TERMS

ROCK CORE PHOTOGRAPHS

ATTERBERG LIMIT TESTING RESULTS

COMPRESSIVE STRENGTH TESTING RESULTS

GRAIN SIZE TESTING RESULTS

ANALYTICAL TESTING RESULTS

HYDRAULIC CONDUCTIVITY TESTING RESULTS


COORD. SYS.: MTM ZONE 9 **EASTING:** 349355.88 **NORTHING:** 5019247.87 **ELEVATION:** 96.43

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS:
DATE: February 6, 2025

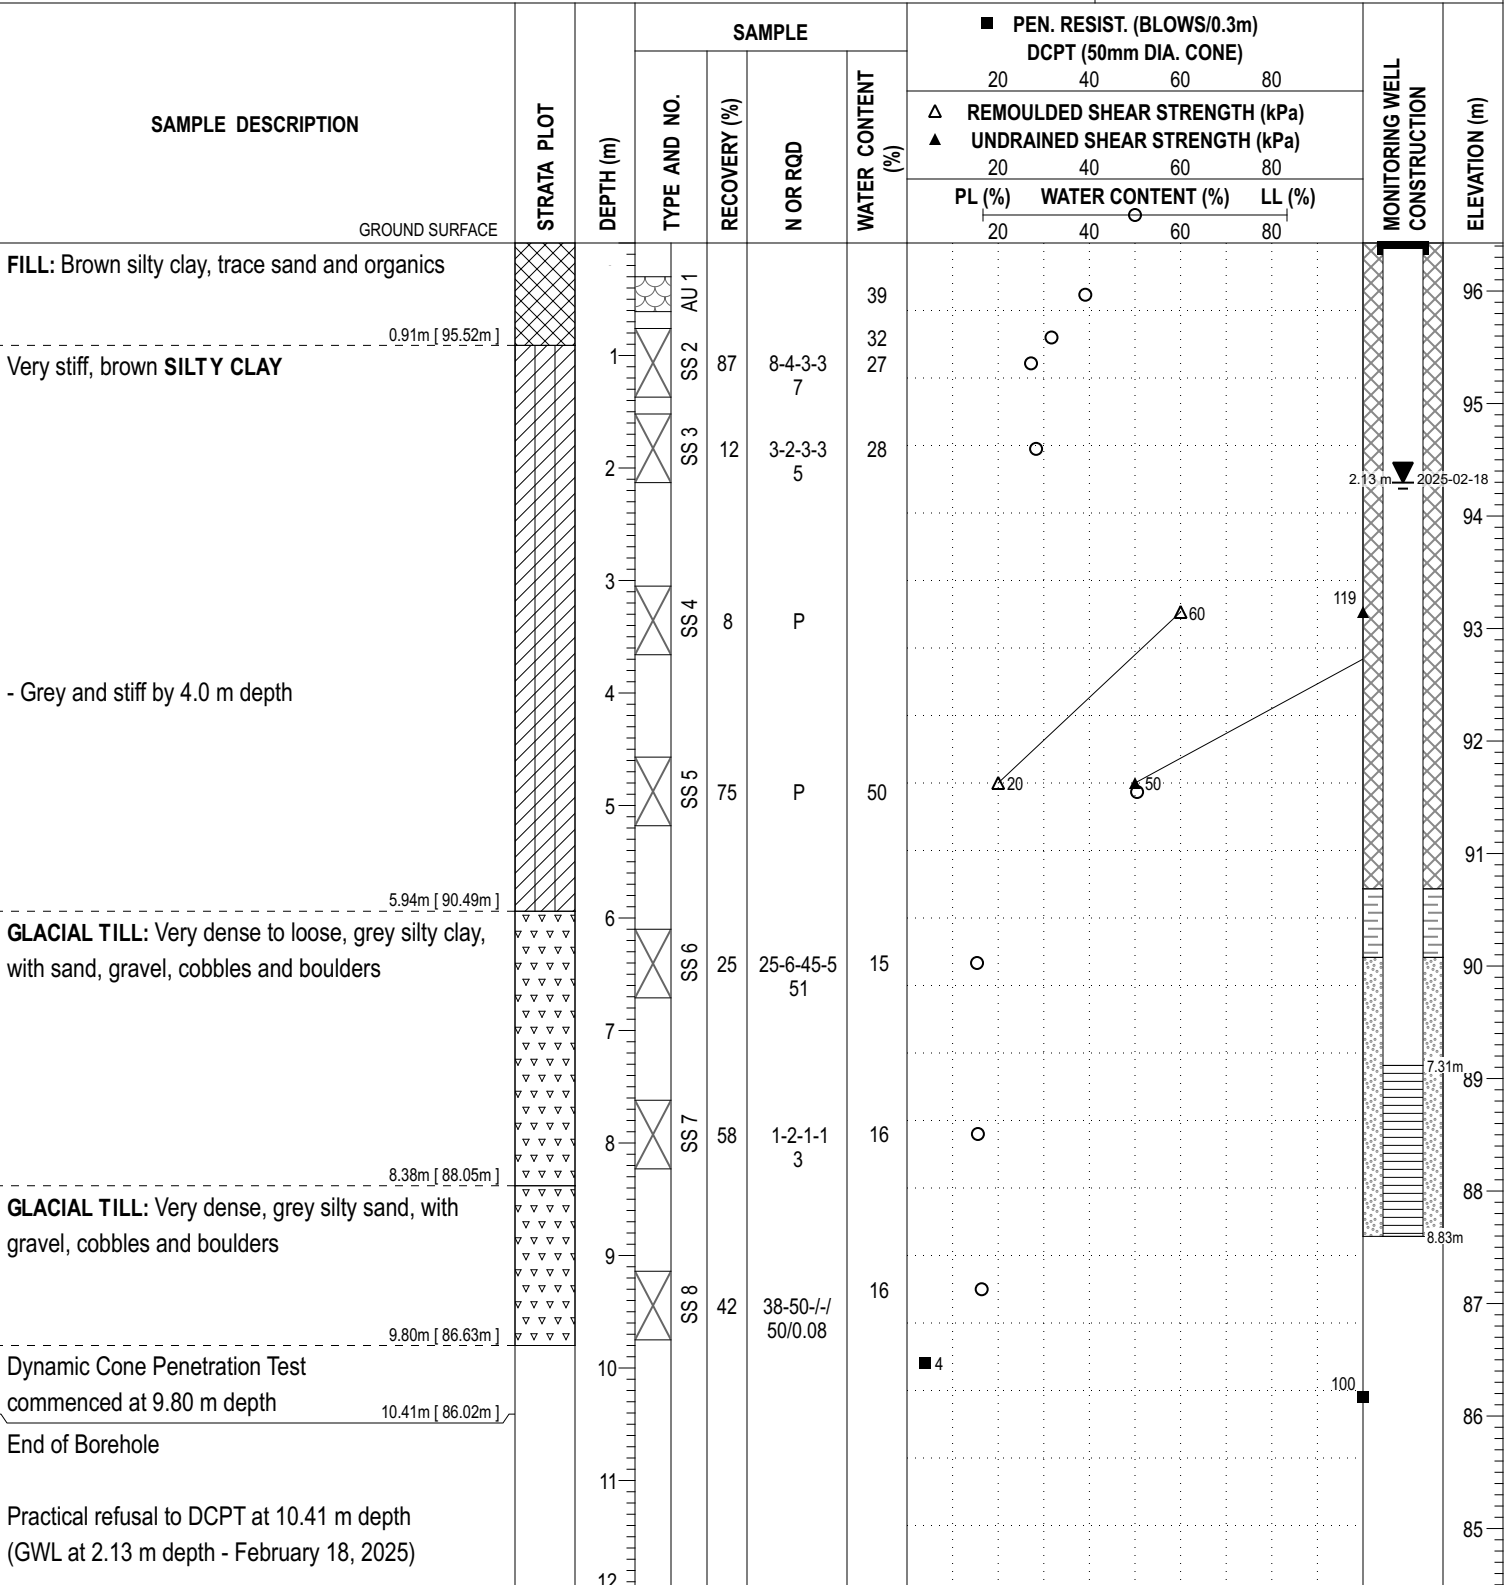HOLE NO. : BH 1-25


DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

ELEVATION: 96.35

FILE NO. : PG7418

HOLE NO. : BH 2-25

DATE: February 6, 2025



COORD. SYS.: MTM ZONE 9 EASTING: 349363.18 NORTHING: 5019236.08 ELEVATION: 96.27

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS:

DATE: February 7, 2025

HOLE NO. : BH 3-25

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE				■ PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)				PIEZOMETER CONSTRUCTION	ELEVATION (m)
			TYPE AND NO.	RECOVERY (%)	N OR RQD	WATER CONTENT (%)	20	40	60	80		
							△ REMOULDED SHEAR STRENGTH (kPa)					
							▲ UNDRAINED SHEAR STRENGTH (kPa)					
GROUND SURFACE						PL (%)	WATER CONTENT (%)	LL (%)				
						20	40	60	80			
Not Sampled											96	
		1										
											95	
Dynamic Cone Penetration Test commenced at 1.52 m depth		2										
											94	
		3										
											93	
		4										
											92	
		5										
											91	
		6										
											90	
		7										
											89	
		8					5					
							9				88	
							17					
							10					
		9								100		
9.22m [87.05m]											87	
End of Borehole												
		10									86	
DCPT Pushed from 1.52 m to 9.22 m depth												
		11									85	
Practical refusal to DCPT at 9.22 m depth												
		12										

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

COORD. SYS.: MTM ZONE 9

EASTING: 349426.83

NORTHING: 5019178.75


ELEVATION: 95.78

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS:
DATE: February 7, 2025

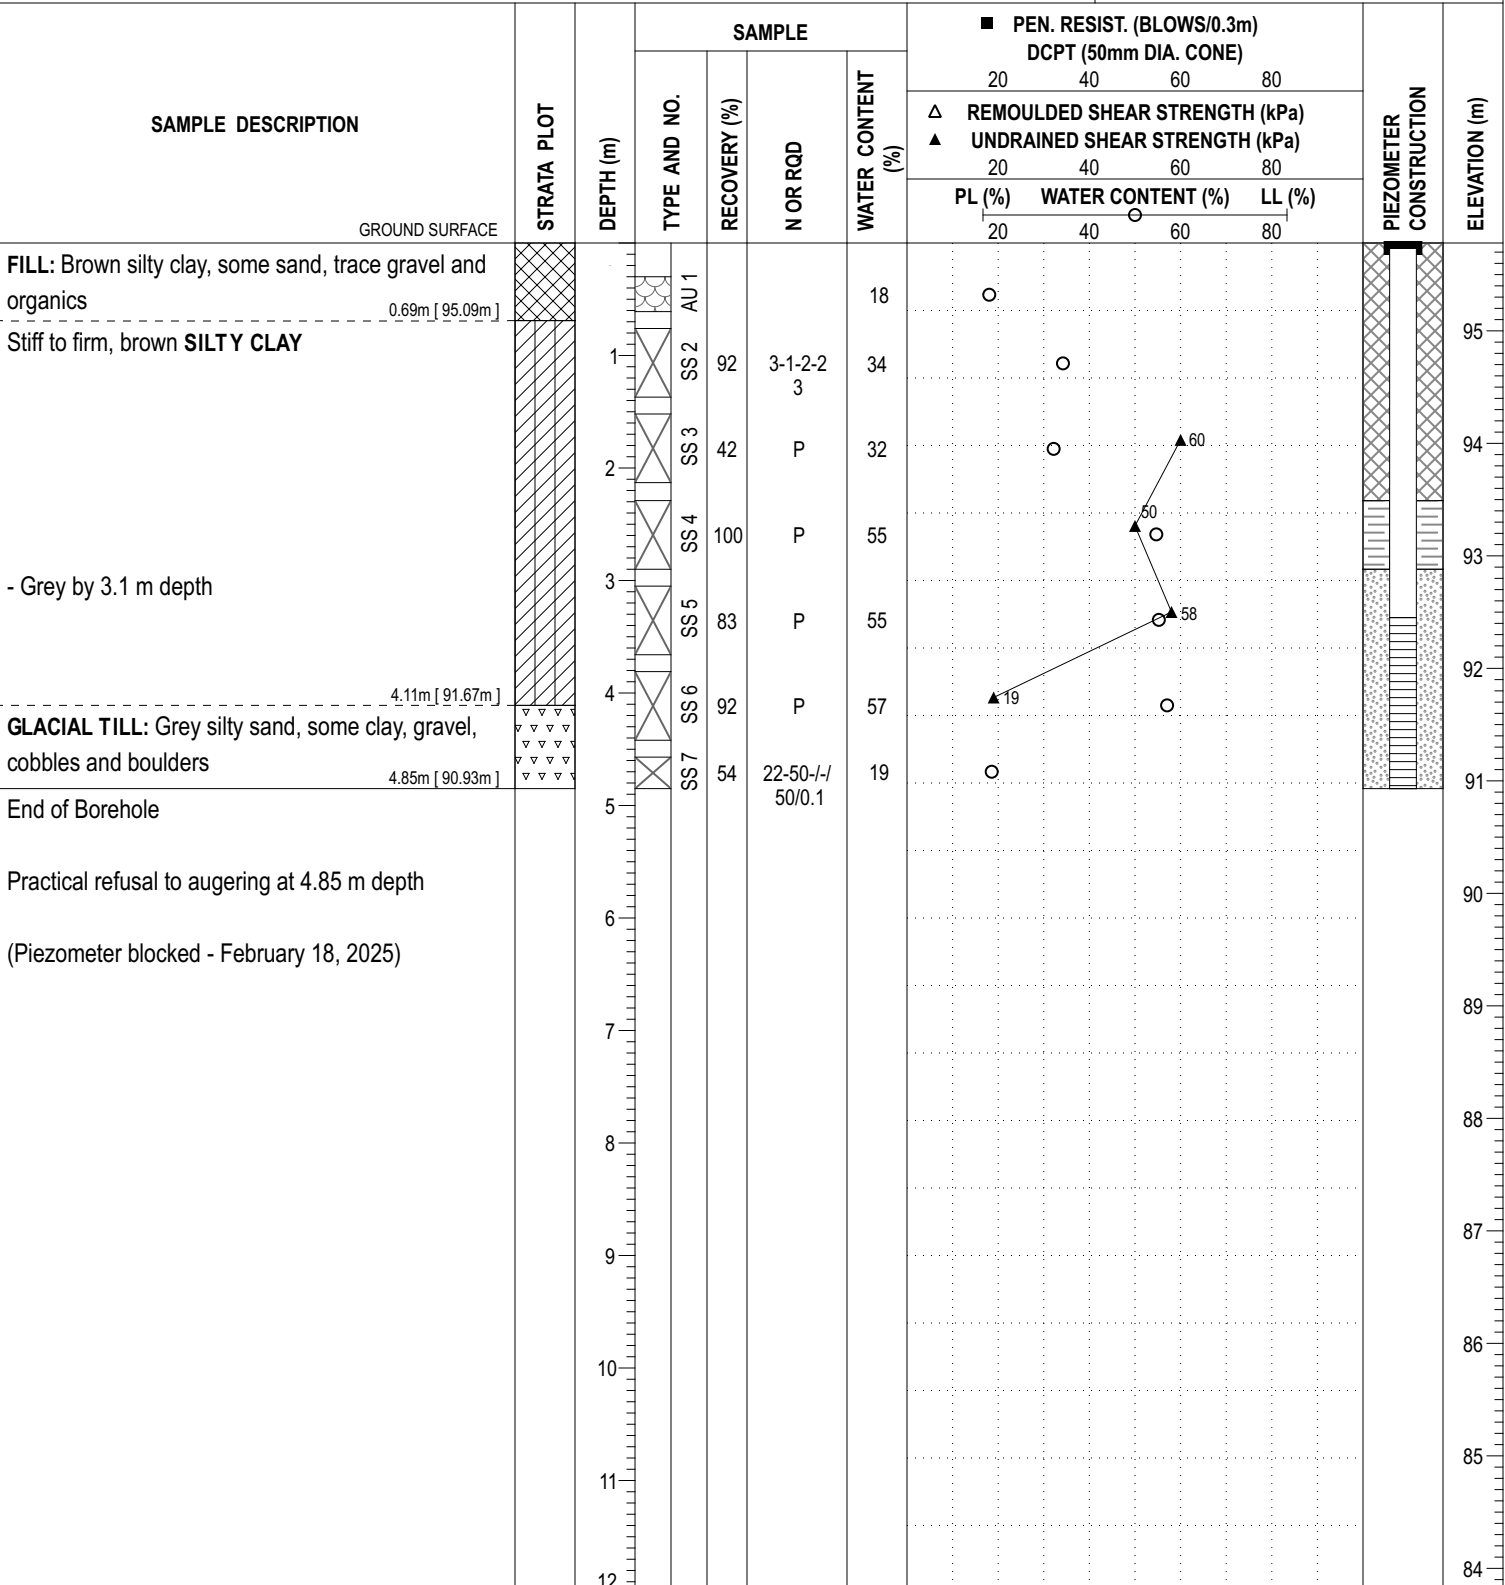HOLE NO. : BH 4-25


DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

COORD. SYS.: MTM ZONE 9 **EASTING:** 349463.69 **NORTHING:** 5019155.73 **ELEVATION:** 97.17

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: CME-55 Low Clearance Drill

REMARKS:
DATE: February 7, 2025

HOLE NO. : BH 5-25

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE				■ PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)				PIEZOMETER CONSTRUCTION	ELEVATION (m)
			TYPE AND NO.	RECOVERY (%)	N OR RQD	WATER CONTENT (%)	20 40 60 80					
							△ REMOULDED SHEAR STRENGTH (kPa)					
							▲ UNDRAINED SHEAR STRENGTH (kPa)					
							20 40 60 80					
PL (%) WATER CONTENT (%) LL (%)							20 40 60 80					
GROUND SURFACE												
FILL: Brown silty clay, with sand, gravel and organics			AU 1			12						97
1.37m [95.80m]			SS 2	58	4-4-7-50 11	22						96
End of Borehole		2										95
Practical refusal to augering at 1.37 m depth on inferred boulder		3										94
		4										93
		5										92
		6										91
		7										90
		8										89
		9										88
		10										87
		11										86
		12										

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

ELEVATION: 97.17

FILE NO. : PG7418

HOLE NO. : BH 5A-25

DATE: February 7, 2025



PAGE: 1 / 1

COORD. SYS.: MTM ZONE 9 EASTING: 349398.84 NORTHING: 5019316.70 ELEVATION: 101.50

PROJECT: Proposed Residential Development

FILE NO. : **PG7418**

ADVANCED BY: Excavator

REMARKS:


DATE: February 5, 2025

HOLE NO. : **TP 1-25**

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE				■ PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)				PIEZOMETER CONSTRUCTION	ELEVATION (m)	
			TYPE AND NO.	RECOVERY (%)	N OR RQD	WATER CONTENT (%)	20	40	60	80			
							Δ	REMOULDED SHEAR STRENGTH (kPa)					
							▲	UNDRAINED SHEAR STRENGTH (kPa)					
							PL (%)	WATER CONTENT (%)		LL (%)			
20	40	60	80										
GROUND SURFACE													
TOPSOIL													
0.10m [101.40m]													
FILL: Brown silty clay, with sand and organics													
0.50m [101.00m]													
GLACIAL TILL: Brown silty clay, with sand, gravel, cobbles and boulders													
1.10m [100.40m]													
End of Test Pit													
Practical refusal to excavation at 1.10 m depth													
Test pit dry upon completion of excavation													

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

HOLE NO.: TP 2-25



COORD. SYS.: MTM ZONE 9 EASTING: 349402.73 NORTHING: 5019288.48 ELEVATION: 100.19

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: Excavator

REMARKS:

DATE: February 5, 2025

HOLE NO. : TP 3-25

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE				■ PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)			PIEZOMETER CONSTRUCTION	ELEVATION (m)		
			TYPE AND NO.	RECOVERY (%)	N OR RQD	WATER CONTENT (%)	20	40	60			80	
							△ REMOULDED SHEAR STRENGTH (kPa)						
							▲ UNDRAINED SHEAR STRENGTH (kPa)						
							PL (%)	WATER CONTENT (%)	LL (%)				
20	40	60	80										
GROUND SURFACE													
TOPSOIL										100			
0.10m [100.09m]													
FILL: Brown silty sand, some construction debris and organics, trace clay													
0.80m [99.39m]													
End of Test Pit													
Practical refusal to excavation at 0.80 m depth													
Test pit dry upon completion of excavation													
		1								99			
		2								98			
		3								97			
		4								96			
		5								95			
		6											

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

COORD. SYS.: MTM ZONE 9 EASTING: 349382.02 NORTHING: 5019258.92 ELEVATION: 97.63

PROJECT: Proposed Residential Development


FILE NO. : PG7418

ADVANCED BY: Excavator

REMARKS:

DATE: February 5, 2025

HOLE NO. : TP 4-25

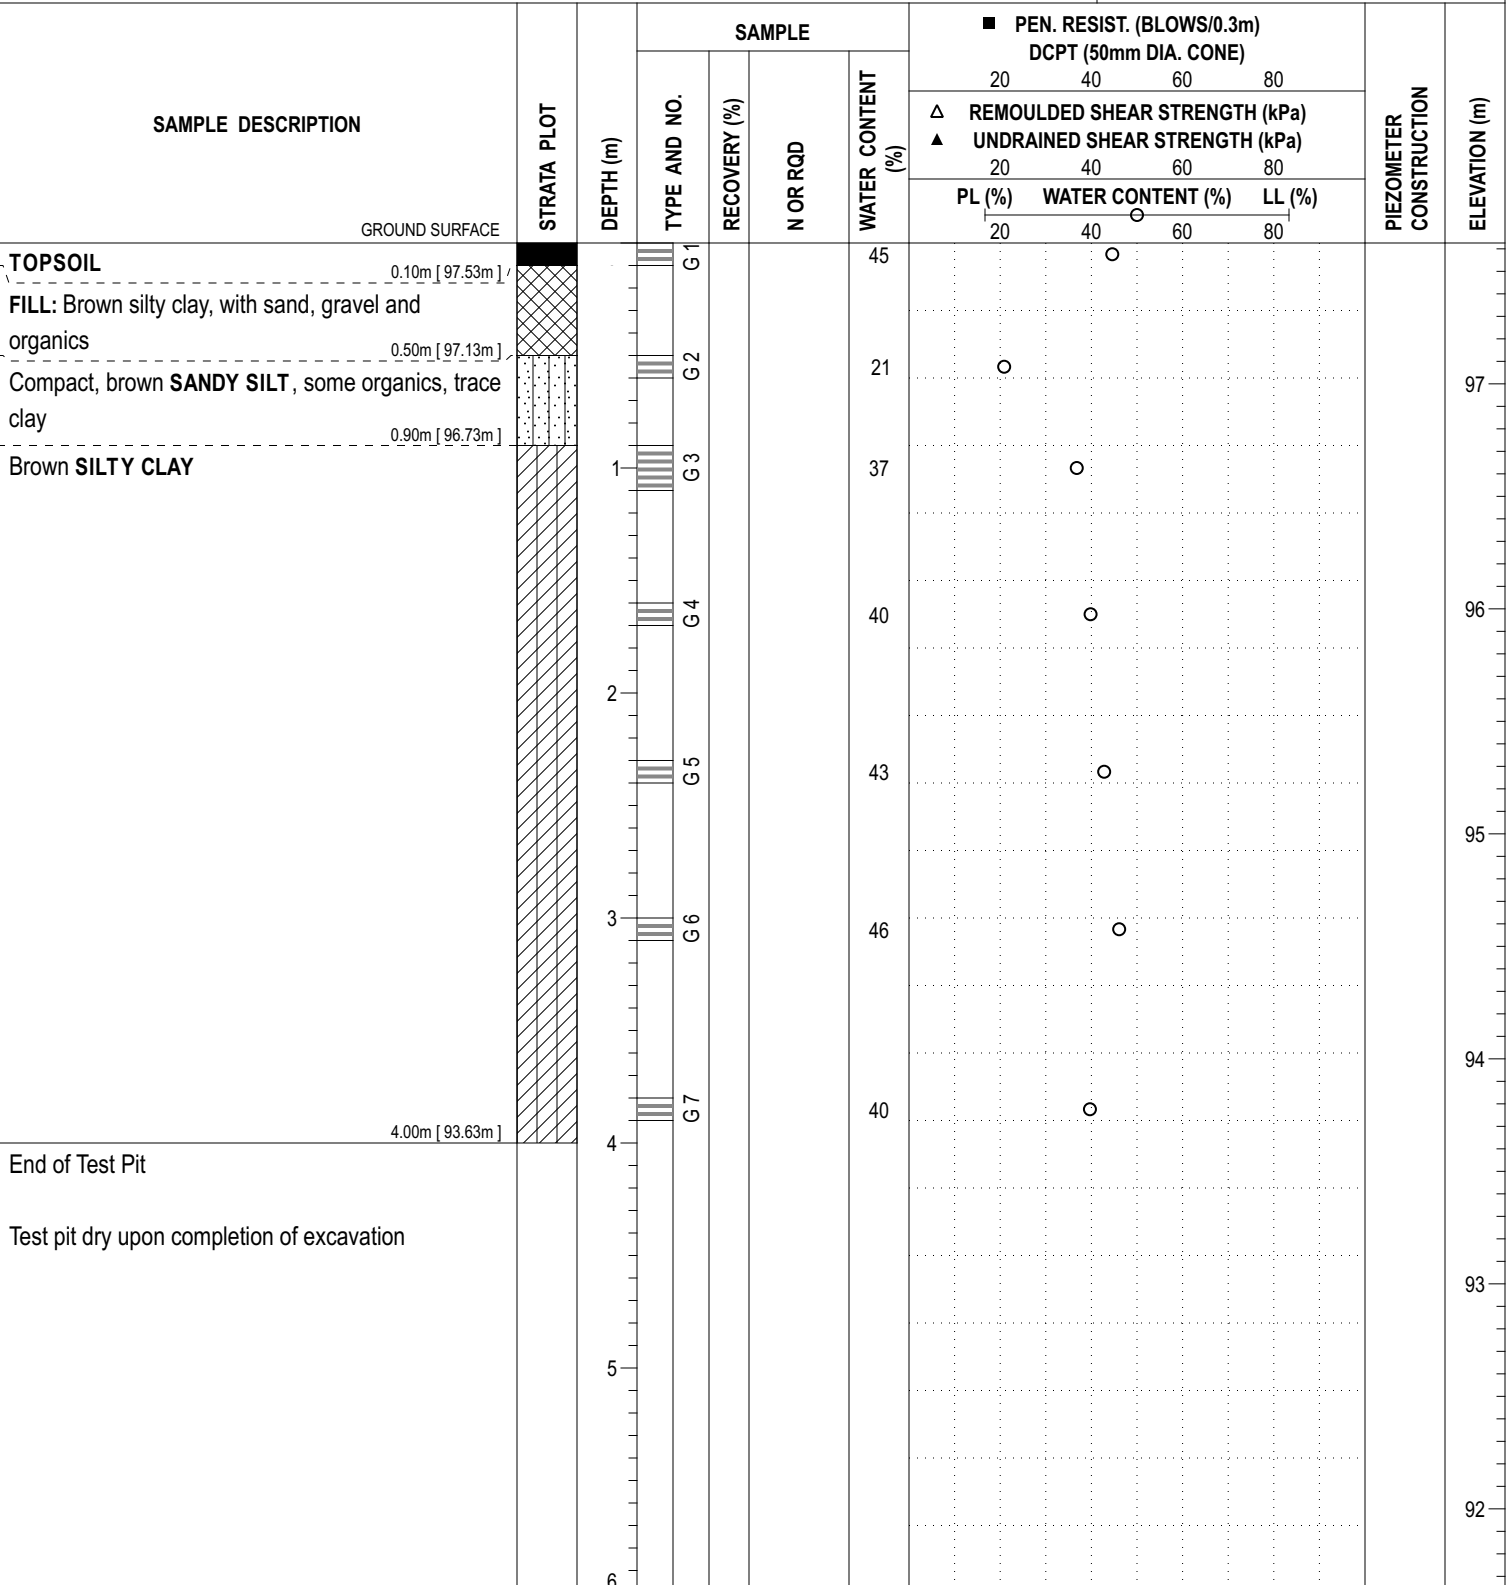

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

COORD. SYS.: MTM ZONE 9 EASTING: 349409.14 NORTHING: 5019258.59 ELEVATION: 98.58

PROJECT: Proposed Residential Development


FILE NO. : PG7418

ADVANCED BY: Excavator

REMARKS:

DATE: February 5, 2025

HOLE NO. : TP 5-25

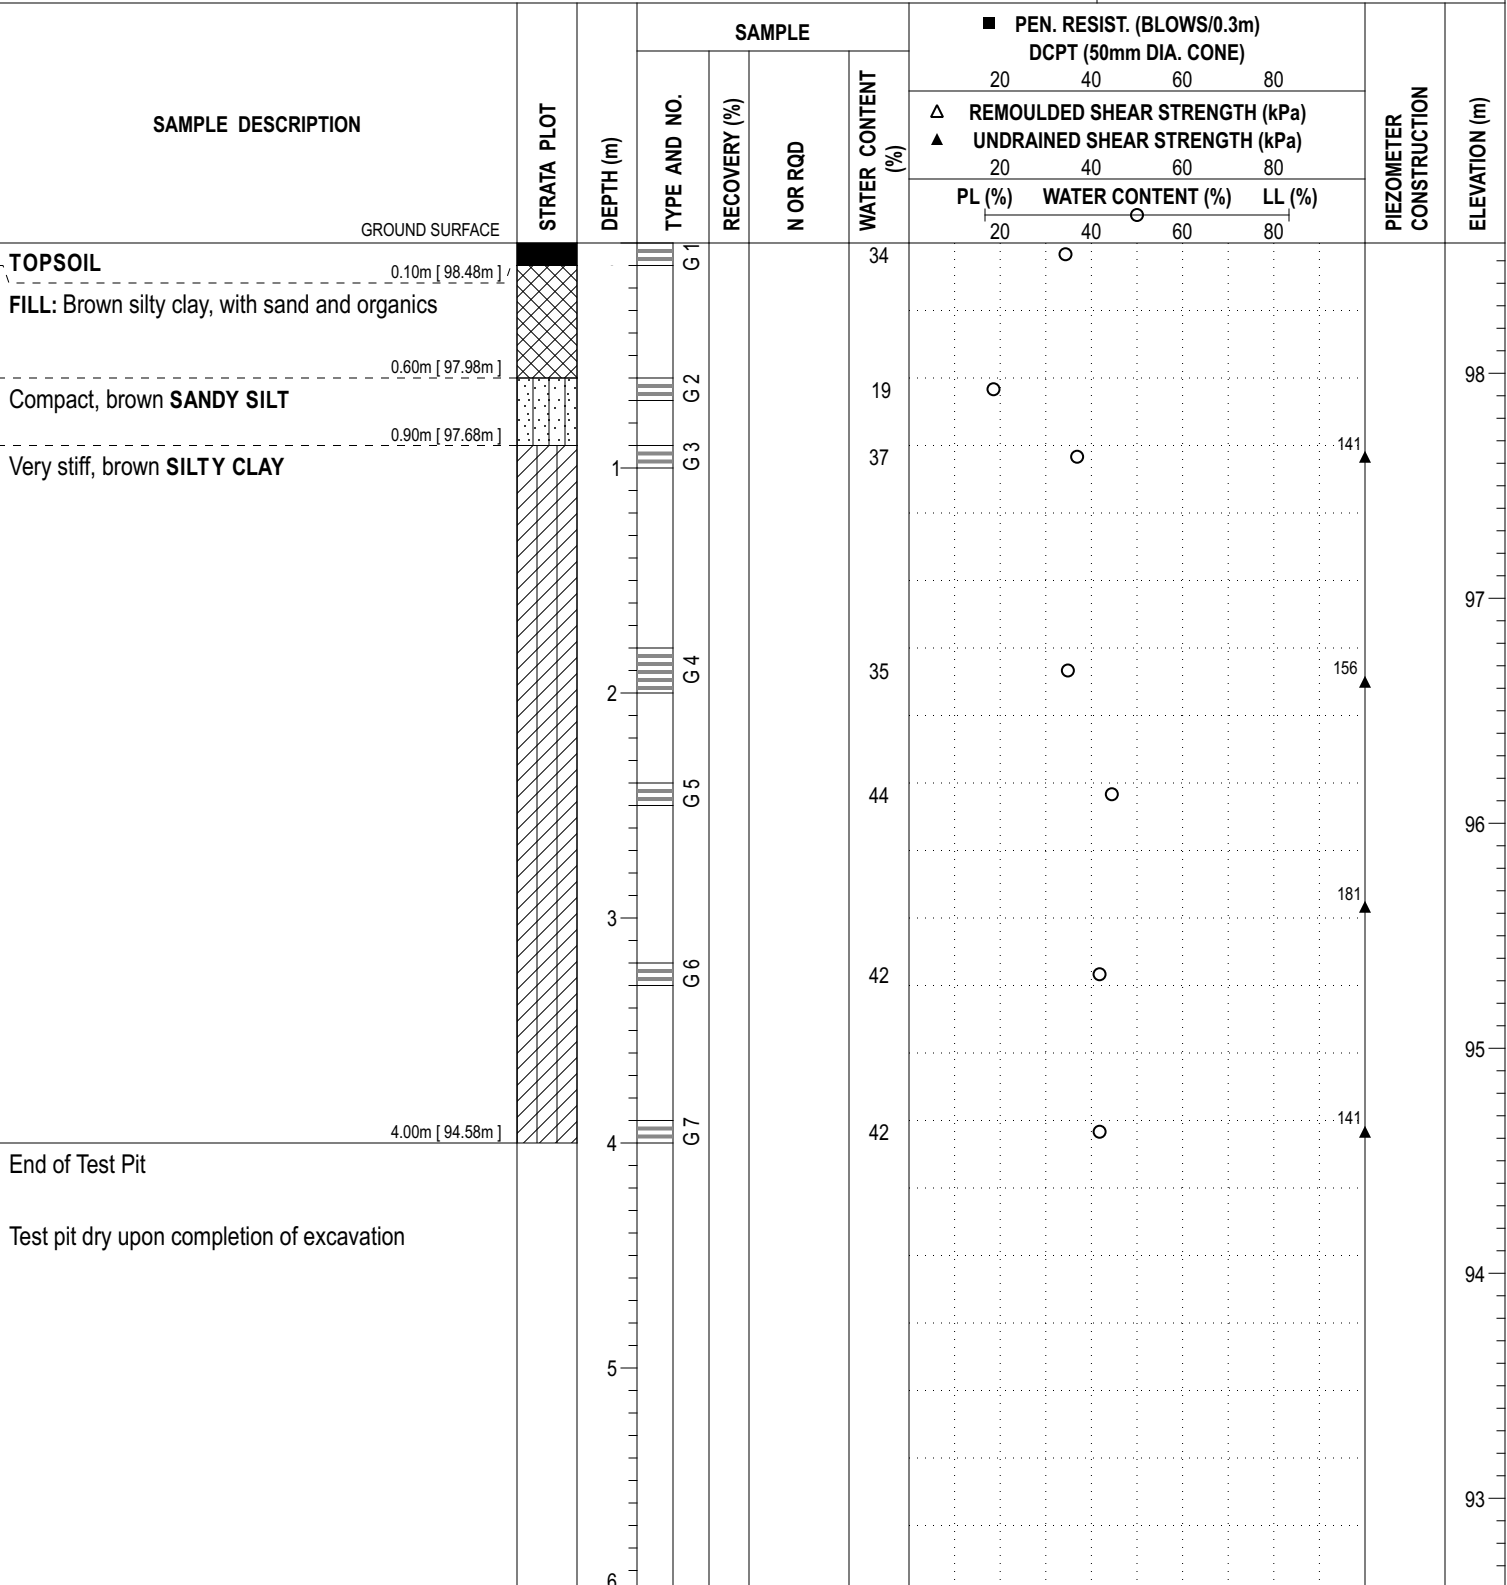

End of Test Pit

Test pit dry upon completion of excavation

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

COORD. SYS.: MTM ZONE 9 **EASTING:** 349429.88 **NORTHING:** 5019227.88 **ELEVATION:** 98.53

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: Excavator

REMARKS:
DATE: February 5, 2025

HOLE NO. : TP 6-25

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE				■ PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)				PIEZOMETER CONSTRUCTION	ELEVATION (m)
			TYPE AND NO.	RECOVERY (%)	N OR RQD	WATER CONTENT (%)	20	40	60	80		
							Δ REMOULDED SHEAR STRENGTH (kPa)					
							▲ UNDRAINED SHEAR STRENGTH (kPa)					
							PL (%)	WATER CONTENT (%)	LL (%)			
20	40	60	80									
GROUND SURFACE												
TOPSOIL						19						
0.20m [98.33m]												
End of Test Pit												
Practical refusal to excavation at 0.20 m depth											98	
Test pit dry upon completion of excavation		1										
											97	
		2										
											96	
		3										
											95	
		4										
											94	
		5										
											93	
		6										

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.


COORD. SYS.: MTM ZONE 9 **EASTING:** 349377.83 **NORTHING:** 5019237.65 **ELEVATION:** 96.98

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: Excavator

REMARKS:
DATE: February 5, 2025

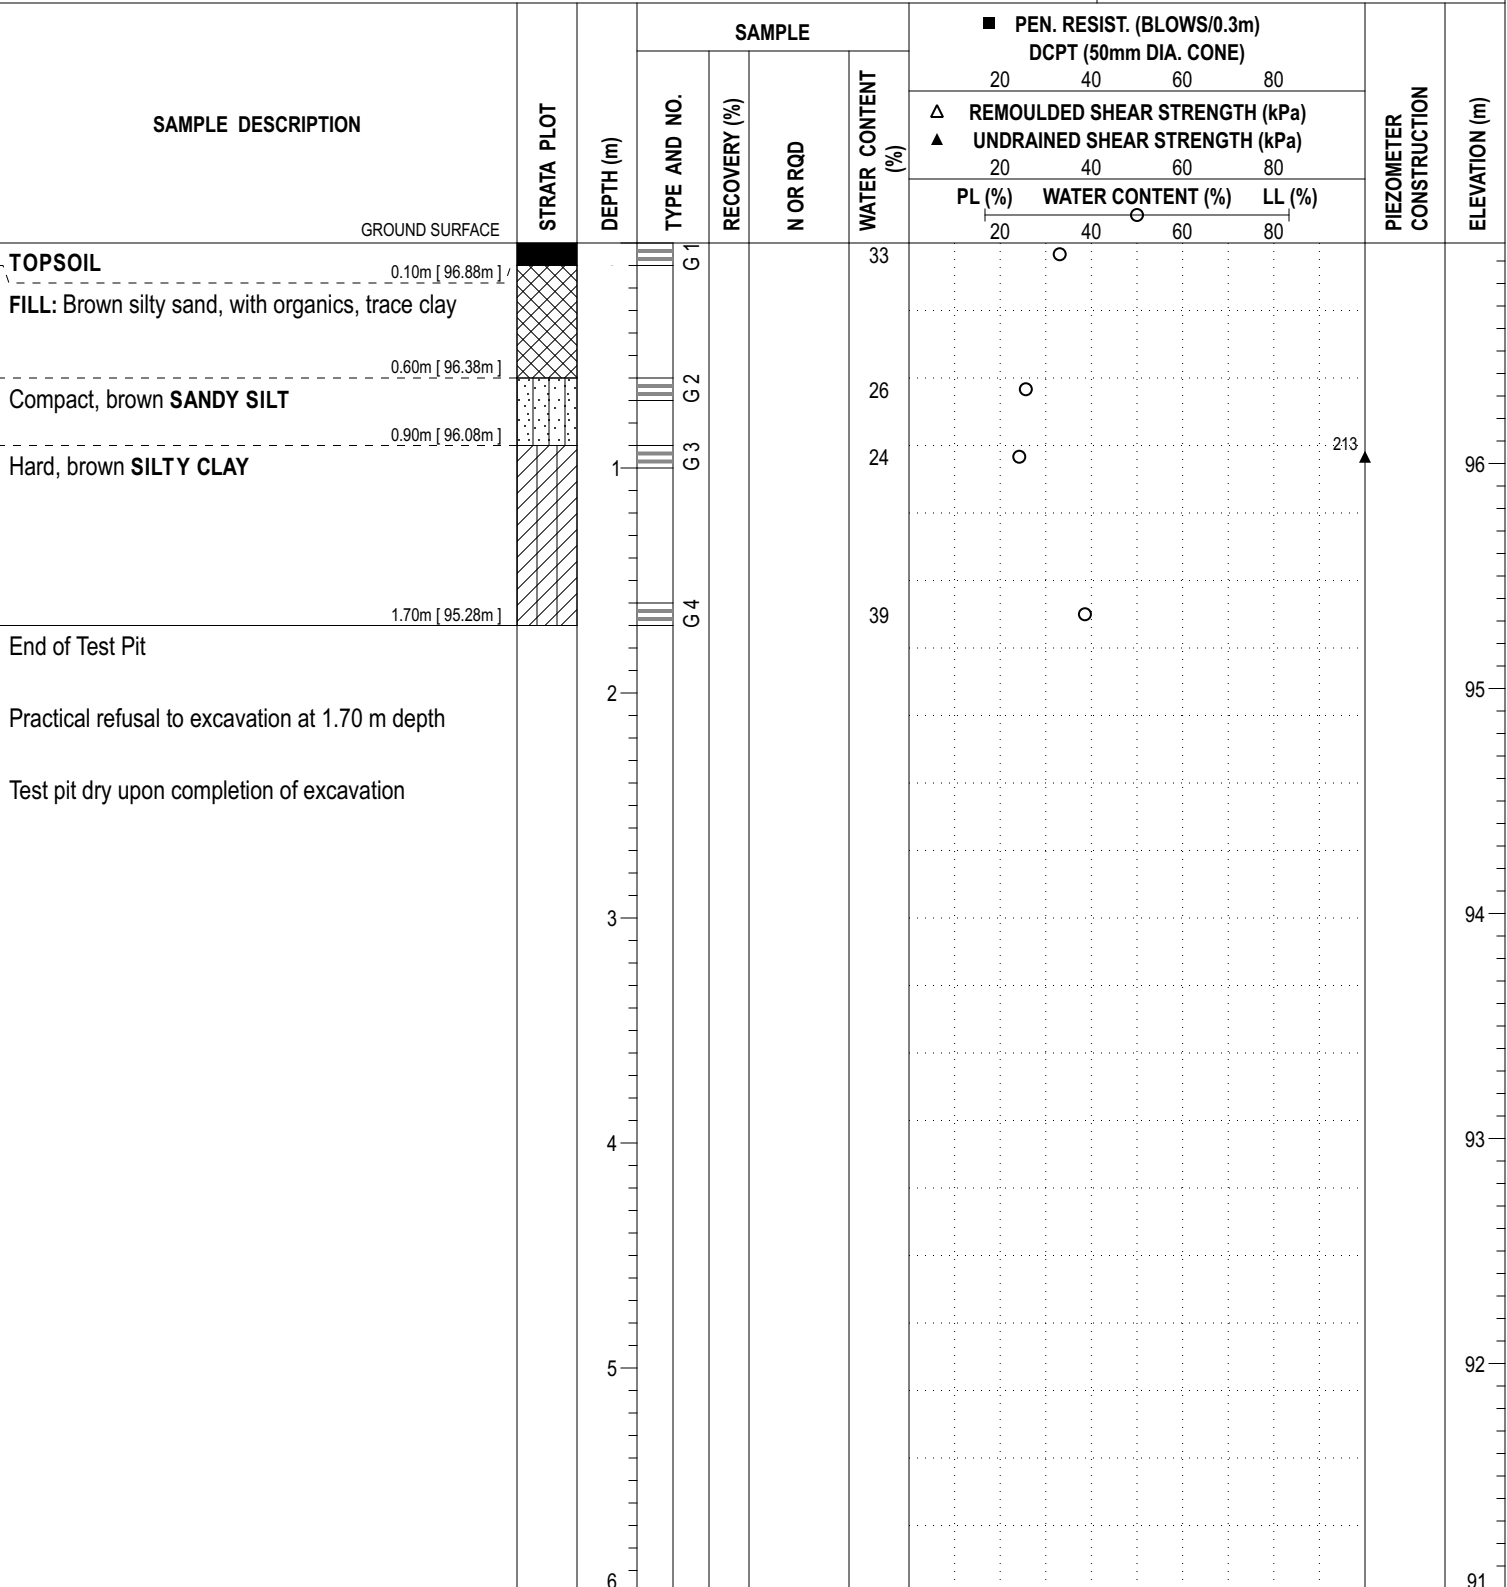HOLE NO. : TP 7-25


DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

ELEVATION: 97.29

HOLE NO.: TP 8-25

COORD. SYS.: MTM ZONE 9 EASTING: 349395.83 NORTHING: 5019336.46 ELEVATION: 101.53

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: Excavator

REMARKS:

DATE: February 5, 2025

HOLE NO. : TP 9-25

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE				■ PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)				PIEZOMETER CONSTRUCTION	ELEVATION (m)	
			TYPE AND NO.	RECOVERY (%)	N OR RQD	WATER CONTENT (%)	20	40	60	80			
							△ REMOULDED SHEAR STRENGTH (kPa)						
							▲ UNDRAINED SHEAR STRENGTH (kPa)						
							PL (%)	WATER CONTENT (%)	LL (%)				
20	40	60	80										
GROUND SURFACE													
TOPSOIL			G 1			37		○					
FILL: Brown silty clay, trace sand and organics													
			G 2			36		○			101		
Brown SILTY CLAY		1											
			G 3			30		○			100		
		2	G 4			28		○					
GLACIAL TILL: Brown silty clay, with sand, gravel, cobbles and boulders													
2.30m [99.23m]													
End of Test Pit											99		
Practical refusal to excavation at 2.30 m depth		3											
Test pit dry upon completion of excavation		4									98		
		5									97		
		6									96		

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

COORD. SYS.: MTM ZONE 9 EASTING: 349397.24 NORTHING: 5019351.95 ELEVATION: 101.99

PROJECT: Proposed Residential Development

FILE NO. : PG7418

ADVANCED BY: Excavator

REMARKS:

DATE: February 5, 2025

HOLE NO. : TP10-25

SAMPLE DESCRIPTION	STRATA PLOT	DEPTH (m)	SAMPLE				■ PEN. RESIST. (BLOWS/0.3m) DCPT (50mm DIA. CONE)				PIEZOMETER CONSTRUCTION	ELEVATION (m)
			TYPE AND NO.	RECOVERY (%)	N OR RQD	WATER CONTENT (%)	20	40	60	80		
							△ REMOULDED SHEAR STRENGTH (kPa)					
							▲ UNDRAINED SHEAR STRENGTH (kPa)					
PL (%)		WATER CONTENT (%)		LL (%)								
20		40		60		80						

GROUND SURFACE												
TOPSOIL												
0.15m [101.84m]												
End of Test Pit												
Practical refusal to excavation at 0.15 m depth												
Test pit dry upon completion of excavation												
		1										101
		2										100
		3										99
		4										98
		5										97
		6										96

DISCLAIMER: THE DATA PRESENTED IN THIS SHEET IS THE PROPERTY OF PATERSON GROUP AND THE CLIENT FOR WHOM IT WAS PRODUCED. THIS SHEET SHOULD BE READ IN CONJUNCTION WITH ITS CORRESPONDING REPORT. PATERSON GROUP IS NOT RESPONSIBLE FOR THE UNAUTHORIZED USE OF THIS DATA.

SOIL PROFILE AND TEST DATA

Geotechnical Investigation

Prop. Mixed-use Development - 475 Terry Fox Drive
Ottawa, Ontario

DATUM Ground surface elevations provided by Annis, O'Sullivan Vollebakk Limited.

REMARKS

BORINGS BY CME 55 Power Auger


DATE 27 October 2015

FILE NO.

PG3649

HOLE NO.

BH 1

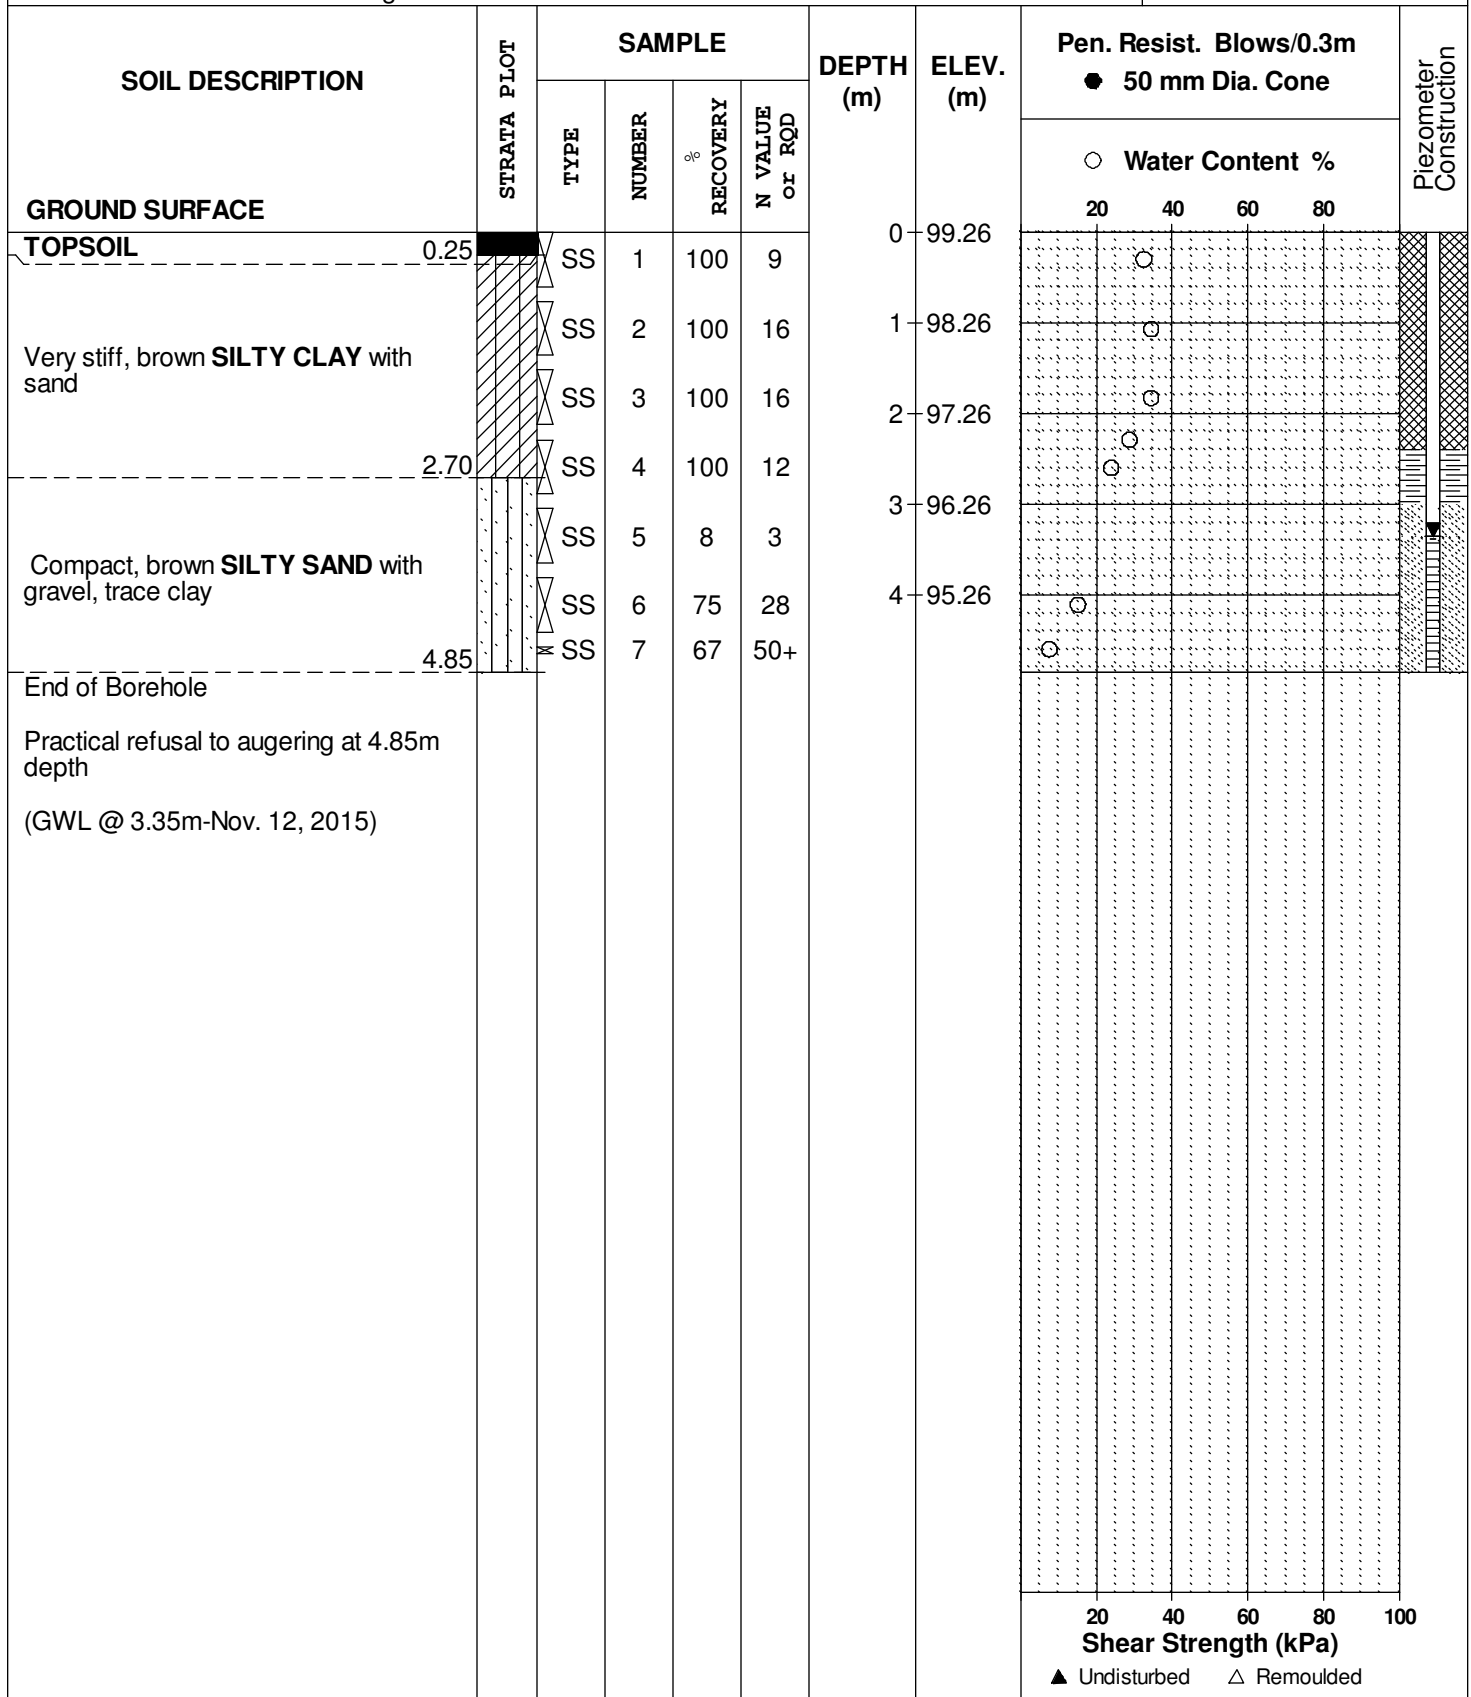

SOIL PROFILE AND TEST DATA

**Geotechnical Investigation
Prop. Mixed-use Development - 475 Terry Fox Drive
Ottawa, Ontario**

FILE NO. PG3649

HOLE NO. **BH 2**

DATE 27 October 2015

[illegible]

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Prop. Mixed-use Development - 475 Terry Fox Drive
Ottawa, Ontario

DATUM Ground surface elevations provided by Annis, O'Sullivan Vollebakk Limited.

FILE NO. PG3649

REMARKS

HOLE NO. **BH 2A**

BORINGS BY CME 55 Power Auger

DATE 27 October 2015

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %				
								20	40	60	80	
GROUND SURFACE												
TOPSOIL	0.30					0	98.18					
Very stiff, brown SILTY CLAY with sand	1.37					1	97.18					
Dense, brown SILTY SAND with gravel, trace clay	2.39	SS	1		50+	2	96.18					
End of Borehole												
Practical refusal to augering at 2.39m depth (BH dry upon completion)												

20406080100

Shear Strength (kPa)

▲ Undisturbed △ Remoulded

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Prop. Mixed-use Development - 475 Terry Fox Drive
Ottawa, Ontario

FILE NO. PG3649

HOLE NO. **BH 3**

DATE 27 October 2015

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %				
GROUND SURFACE								20	40	60	80	
TOPSOIL	0.15					0	97.38					
Very stiff, brown SILTY CLAY with sand		AU	1									
	1.22	SS	2	100	50+	1	96.38					
End of Borehole												
Practical refusal to augering at 1.22m depth												
(BH dry upon completion)												

20406080100

Shear Strength (kPa)

▲ Undisturbed △ Remoulded

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Prop. Mixed-use Development - 475 Terry Fox Drive
Ottawa, Ontario

FILE NO. PG3649

HOLE NO. **BH 3A**

DATE 27 October 2015

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction
		TYPE	NUMBER	% RECOVERY	N VALUE or RQD			○ Water Content %				
GROUND SURFACE								20	40	60	80	
TOPSOIL 0.15						0	97.38					
Very stiff, brown SILTY CLAY with sand						1	96.38					
Dense, brown SILTY SAND 1.52	SS	1	75	50+		2	95.38	○				
End of Borehole 2.29												
Practical refusal to augering at 2.29m depth												
(BH dry upon completion)												

20 40 60 80 100

Shear Strength (kPa)

▲ Undisturbed △ Remoulded

DATUM Ground surface elevations provided by Annis, O'Sullivan Vollebakk Limited.

REMARKS

BORINGS BY CME 55 Power Auger


DATE 27 October 2015

FILE NO.

PG3649

HOLE NO.

BH 4

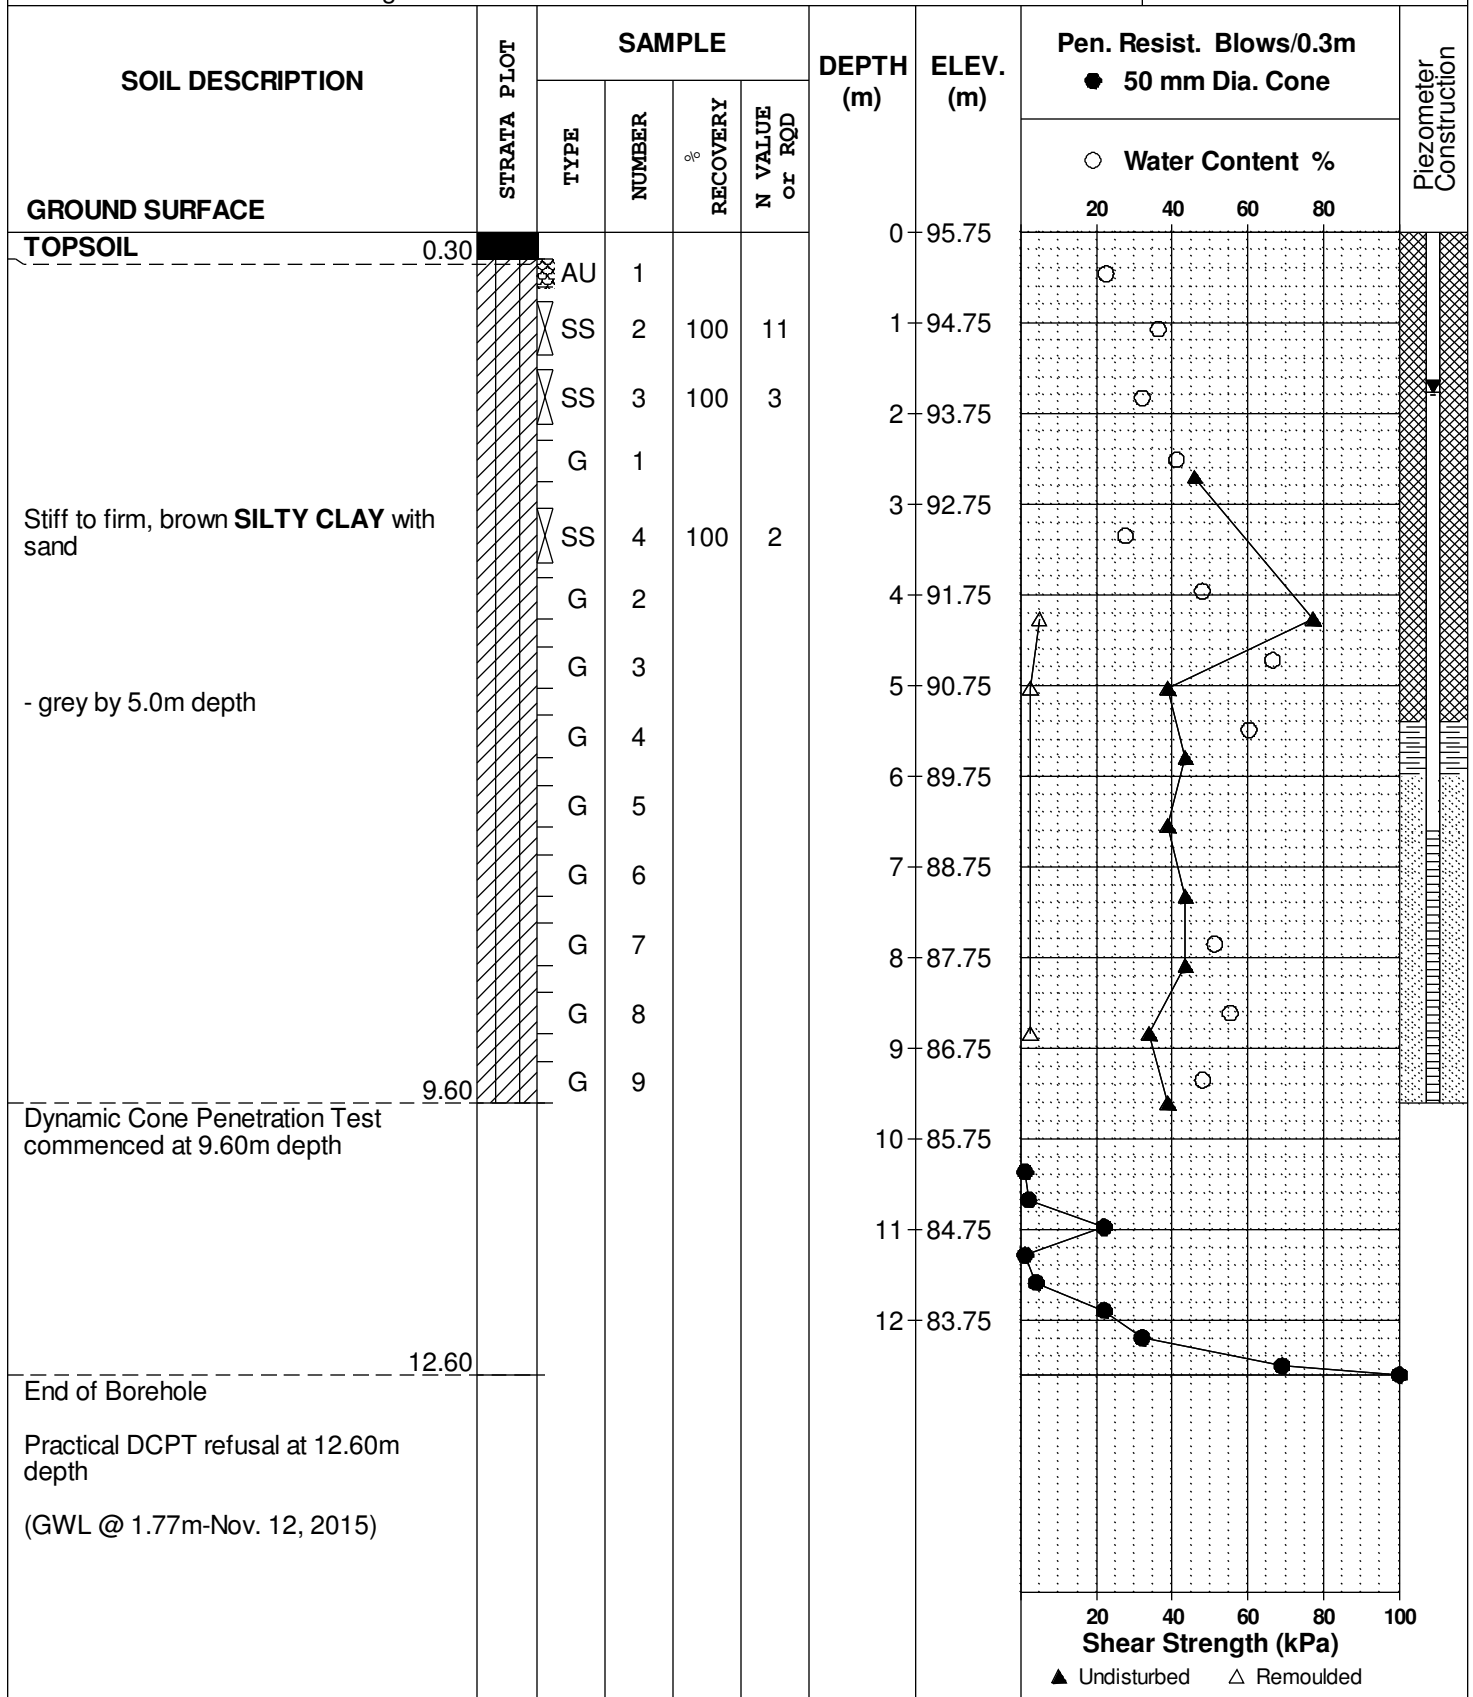

SOIL PROFILE AND TEST DATA

Geotechnical Investigation
Prop. Mixed-use Development - 475 Terry Fox Drive
Ottawa, Ontario

DATUM Ground surface elevations provided by Annis, O'Sullivan Vollebakk Limited.


REMARKS

BORINGS BY CME 55 Power Auger

DATE 27 October 2015

FILE NO.
PG3649

HOLE NO.
BH 5

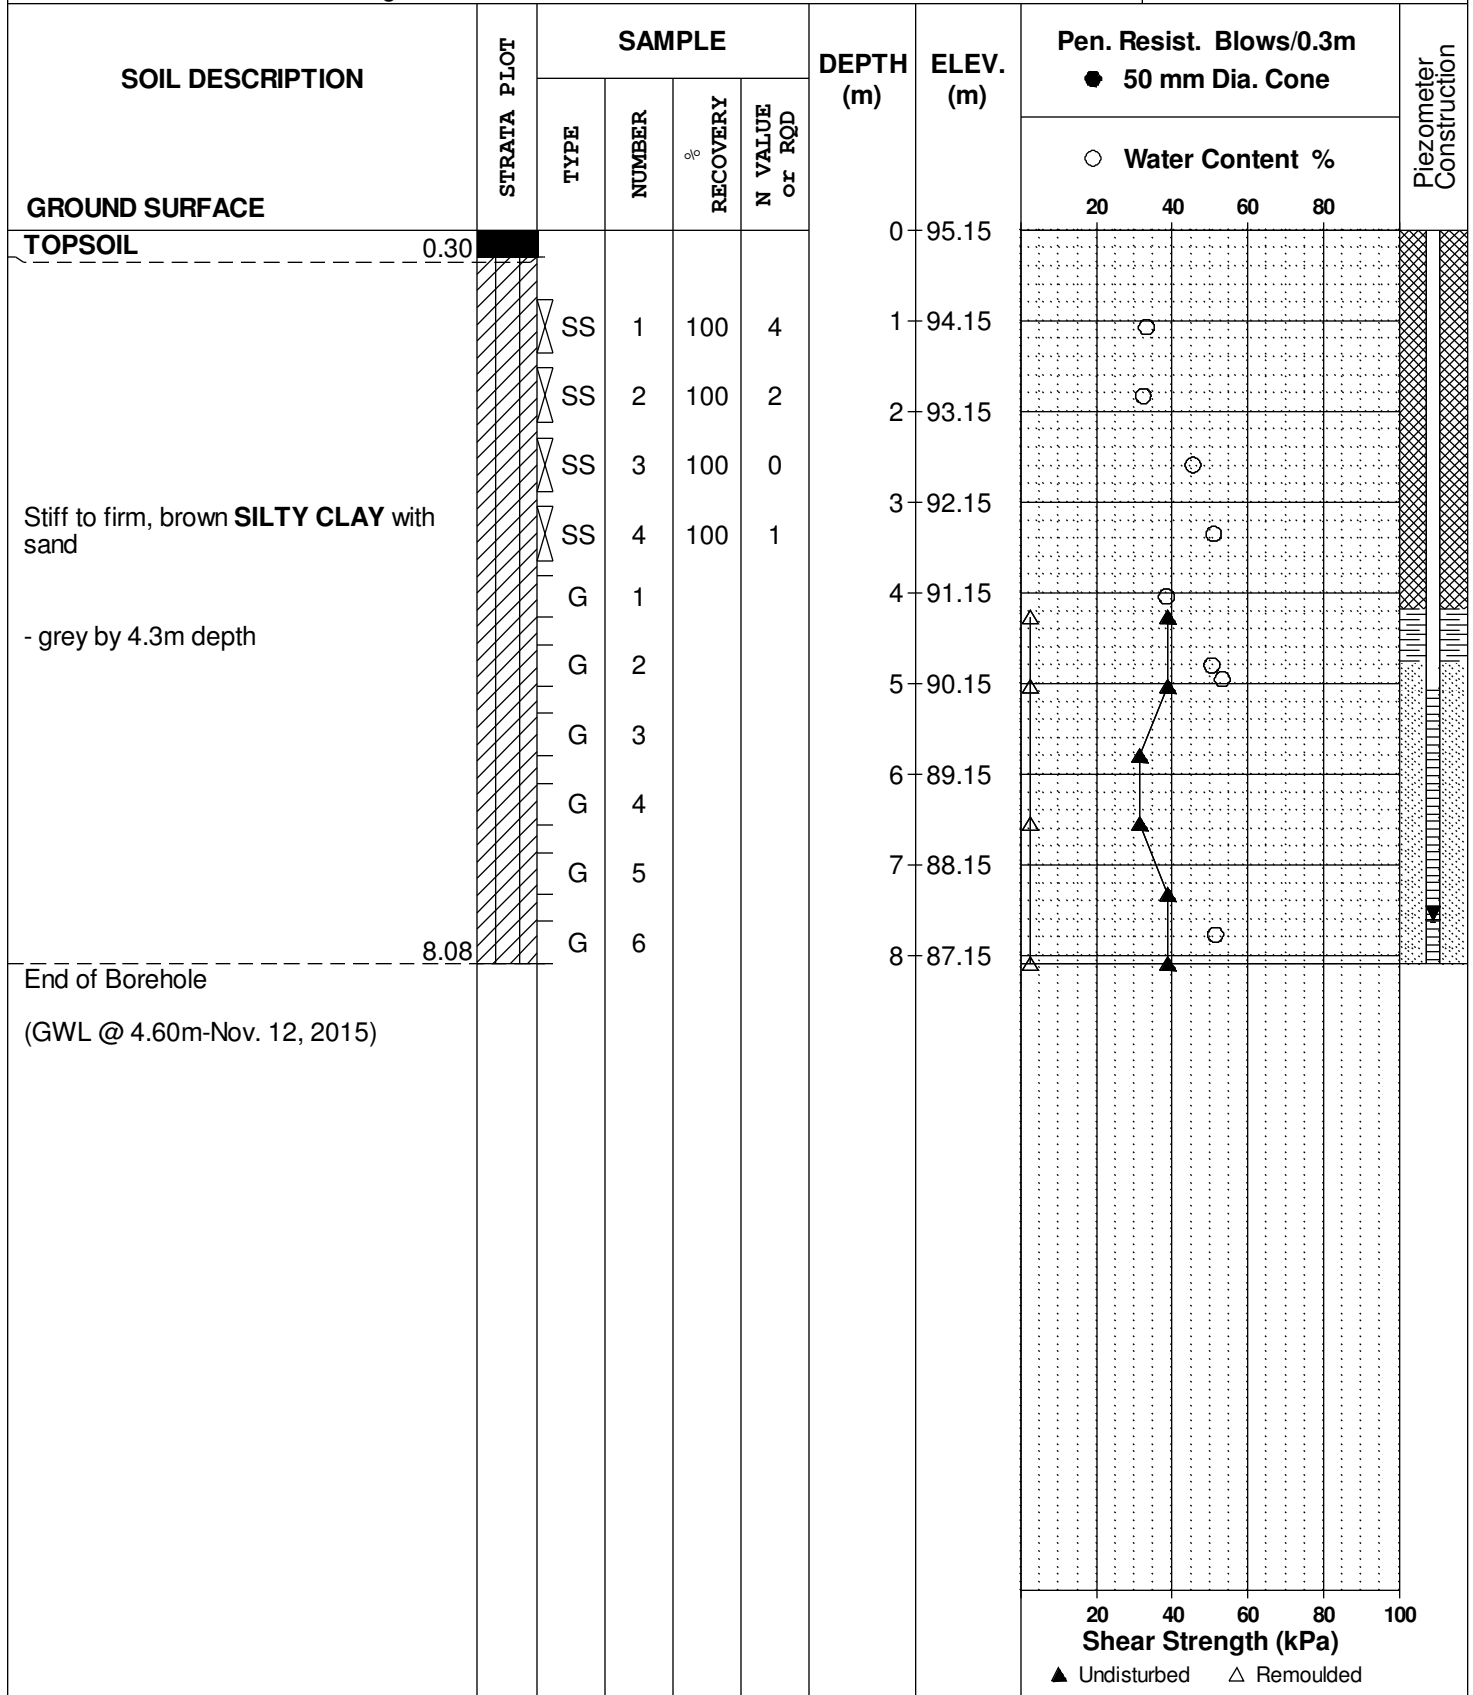

DATUM Ground surface elevations provided by Annis, O'Sullivan Vollebakk Limited.


REMARKS

BORINGS BY CME 55 Power Auger

DATE 27 October 2015

FILE NO.
PG3649

HOLE NO.
BH 6

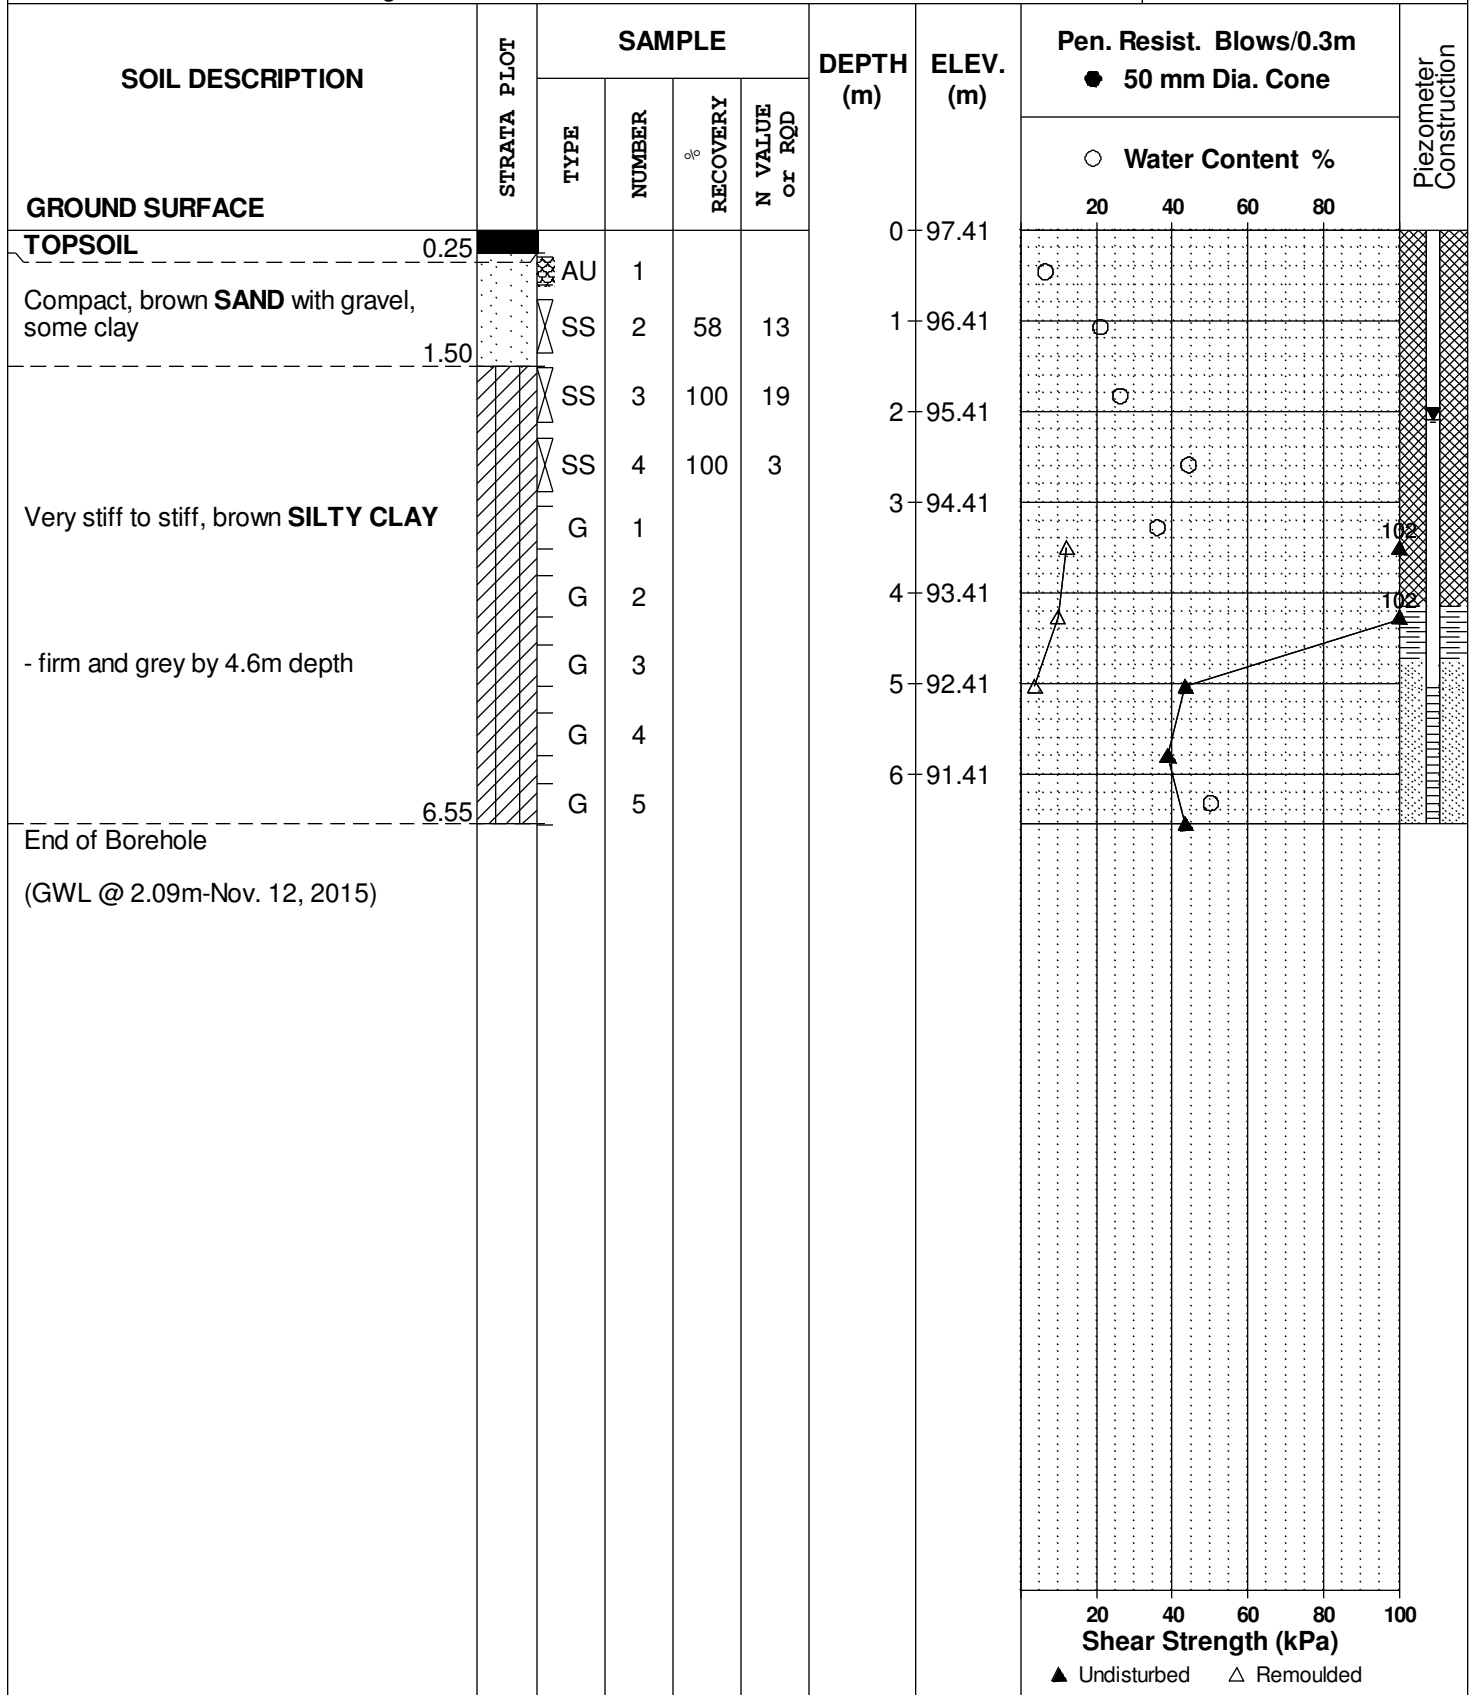

SYMBOLS AND TERMS

SOIL DESCRIPTION

Behavioural properties, such as structure and strength, take precedence over particle gradation in describing soils. Terminology describing soil structure are as follows:

Desiccated	-	having visible signs of weathering by oxidation of clay minerals, shrinkage cracks, etc.
Fissured	-	having cracks, and hence a blocky structure.
Varved	-	composed of regular alternating layers of silt and clay.
Stratified	-	composed of alternating layers of different soil types, e.g. silt and sand or silt and clay.
Well-Graded	-	Having wide range in grain sizes and substantial amounts of all intermediate particle sizes (see Grain Size Distribution).
Uniformly-Graded	-	Predominantly of one grain size (see Grain Size Distribution).

The standard terminology to describe the relative strength of cohesionless soils is the compactness condition, usually inferred from the results of the Standard Penetration Test (SPT) 'N' value. The SPT N value is the number of blows of a 63.5 kg hammer, falling 760 mm, required to drive a 51 mm O.D. split spoon sampler 300 mm into the soil after an initial penetration of 150 mm. An SPT N value of "P" denotes that the split-spoon sampler was pushed 300 mm into the soil without the use of a falling hammer.

Compactness Condition	'N' Value	Relative Density %
Very Loose	<4	<15
Loose	4-10	15-35
Compact	10-30	35-65
Dense	30-50	65-85
Very Dense	>50	>85

The standard terminology to describe the strength of cohesive soils is the consistency, which is based on the undisturbed undrained shear strength as measured by the in situ or laboratory shear vane tests, unconfined compression tests, or occasionally by the Standard Penetration Test (SPT). Note that the typical correlations of undrained shear strength to SPT N value (tabulated below) tend to underestimate the consistency for sensitive silty clays, so Paterson reviews the applicable split spoon samples in the laboratory to provide a more representative consistency value based on tactile examination.

Consistency	Undrained Shear Strength (kPa)	'N' Value
Very Soft	<12	<2
Soft	12-25	2-4
Firm	25-50	4-8
Stiff	50-100	8-15
Very Stiff	100-200	15-30
Hard	>200	>30

SYMBOLS AND TERMS (continued)

SOIL DESCRIPTION (continued)

Cohesive soils can also be classified according to their “sensitivity”. The sensitivity, S_t , is the ratio between the undisturbed undrained shear strength and the remoulded undrained shear strength of the soil. The classes of sensitivity may be defined as follows:

Low Sensitivity:	$S_t < 2$
Medium Sensitivity:	$2 < S_t < 4$
Sensitive:	$4 < S_t < 8$
Extra Sensitive:	$8 < S_t < 16$
Quick Clay:	$S_t > 16$

ROCK DESCRIPTION

The structural description of the bedrock mass is based on the Rock Quality Designation (RQD).

The RQD classification is based on a modified core recovery percentage in which all pieces of sound core over 100 mm long are counted as recovery. The smaller pieces are considered to be a result of closely-spaced discontinuities (resulting from shearing, jointing, faulting, or weathering) in the rock mass and are not counted. RQD is ideally determined from NQ or larger size core. However, it can be used on smaller core sizes, such as BQ, if the bulk of the fractures caused by drilling stresses (called “mechanical breaks”) are easily distinguishable from the normal in situ fractures.

RQD %	ROCK QUALITY
90-100	Excellent, intact, very sound
75-90	Good, massive, moderately jointed or sound
50-75	Fair, blocky and seamy, fractured
25-50	Poor, shattered and very seamy or blocky, severely fractured
0-25	Very poor, crushed, very severely fractured

SAMPLE TYPES

SS	-	Split spoon sample (obtained in conjunction with the performing of the Standard Penetration Test (SPT))
TW	-	Thin wall tube or Shelby tube, generally recovered using a piston sampler
G	-	"Grab" sample from test pit or surface materials
AU	-	Auger sample or bulk sample
WS	-	Wash sample
RC	-	Rock core sample (Core bit size BQ, NQ, HQ, etc.). Rock core samples are obtained with the use of standard diamond drilling bits.

SYMBOLS AND TERMS (continued)

PLASTICITY LIMITS AND GRAIN SIZE DISTRIBUTION

WC%	-	Natural water content or water content of sample, %
LL	-	Liquid Limit, % (water content above which soil behaves as a liquid)
PL	-	Plastic Limit, % (water content above which soil behaves plastically)
PI	-	Plasticity Index, % (difference between LL and PL)
D _{xx}	-	Grain size at which xx% of the soil, by weight, is of finer grain sizes These grain size descriptions are not used below 0.075 mm grain size
D ₁₀	-	Grain size at which 10% of the soil is finer (effective grain size)
D ₆₀	-	Grain size at which 60% of the soil is finer
C _c	-	Concavity coefficient = $(D_{30})^2 / (D_{10} \times D_{60})$
C _u	-	Uniformity coefficient = D_{60} / D_{10}

C_c and C_u are used to assess the grading of sands and gravels:

Well-graded gravels have: $1 < C_c < 3$ and $C_u > 4$

Well-graded sands have: $1 < C_c < 3$ and $C_u > 6$

Sands and gravels not meeting the above requirements are poorly-graded or uniformly-graded.

C_c and C_u are not applicable for the description of soils with more than 10% silt and clay
(more than 10% finer than 0.075 mm or the #200 sieve)

CONSOLIDATION TEST


p' _o	-	Present effective overburden pressure at sample depth
p' _c	-	Preconsolidation pressure of (maximum past pressure on) sample
C _{cr}	-	Recompression index (in effect at pressures below p' _c)
C _c	-	Compression index (in effect at pressures above p' _c)
OC Ratio		Overconsolidation ratio = p'_c / p'_o
Void Ratio		Initial sample void ratio = volume of voids / volume of solids
W _o	-	Initial water content (at start of consolidation test)

PERMEABILITY TEST

k	-	Coefficient of permeability or hydraulic conductivity is a measure of the ability of water to flow through the sample. The value of k is measured at a specified unit weight for (remoulded) cohesionless soil samples, because its value will vary with the unit weight or density of the sample during the test.
---	---	--

SYMBOLS AND TERMS (continued)


STRATA PLOT




Topsoil




Asphalt




Fill




Peat




Sand




Silty Sand




Silt




Sandy Silt



Clay




Silty Clay




Clayey Silty Sand



Glacial Till




Shale




Bedrock

MONITORING WELL AND PIEZOMETER CONSTRUCTION

MONITORING WELL CONSTRUCTION

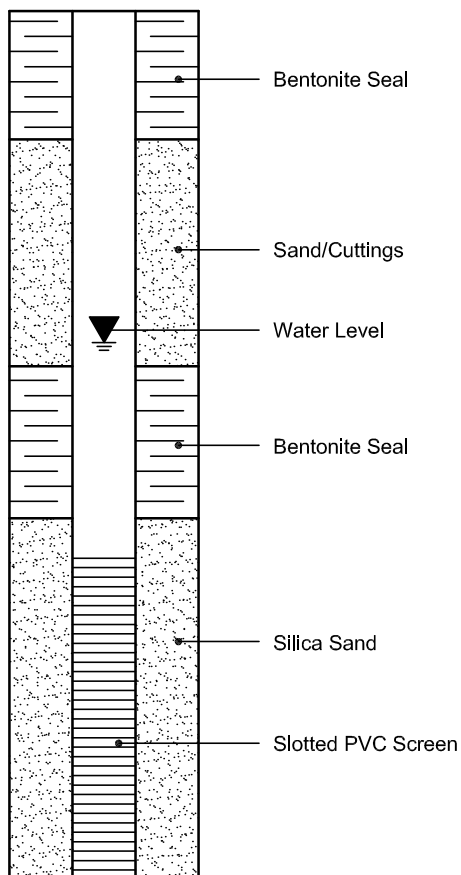

PIEZOMETER CONSTRUCTION

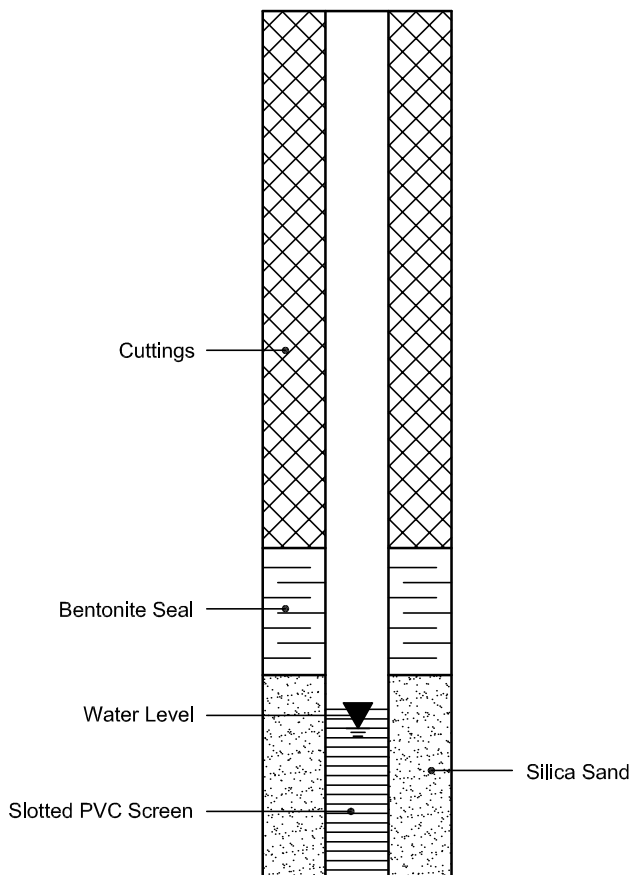

Photograph of Rock Cores – BH2-25 – RC1



Photograph of Rock Core obtained from BH 2-25 from interval RC1

Rock Core interval ranged between 15'2" to 19'8"

Recovery (%) = 100

Rock Quality Designation (RQD) = 83

Photograph of Rock Cores – BH2-25 – RC2



Photograph of Rock Core obtained from BH 2-25 from interval RC2

Rock Core interval ranged between 19'8" to 22'6"

Recovery (%) = 100

Rock Quality Designation (RQD) = 58




**PATERSON
GROUP**

**ATTERBERG LIMITS
LS-703/704**

CLIENT:	Ironclad Developments	FILE NO.:	PG7418
PROJECT:	475 Terry Fox Drive	DATE SAMPLED:	-
LOCATION:	BH 2-25-SS4 @ 7'6"-9'6"	DATE REPORTED:	19-Feb

CAN NO.	3	21	16				
WT. OF CAN	8.71	8.68	8.77				
WT. OF SOIL & CAN	13.24	14.45	14.57				
WT. OF DRY SOIL & CAN	11.34	12.13	12.29				
WT. OF MOISTURE	1.9	2.32	2.28				
WT. OF DRY SOIL & CAN	2.63	3.45	3.52				
WATER CONTENT, w, %	72.24	67.25	64.77				
NO. OF BLOWS, N	14	25	35				

			RESULTS	
CAN NO.	13	11	LIQUID LIMIT	68
WT. OF CAN	19.36	19.90	PLASTIC LIMIT	32
WT. OF SOIL & CAN	28.92	33.20	PLASTICITY INDEX	36
WT. OF DRY SOIL & CAN	26.59	30.05		
WT. OF MOISTURE	2.33	3.15		
WT. OF DRY SOIL & CAN	7.23	10.15		
WATER CONTENT, w, %	32.23	31.03		

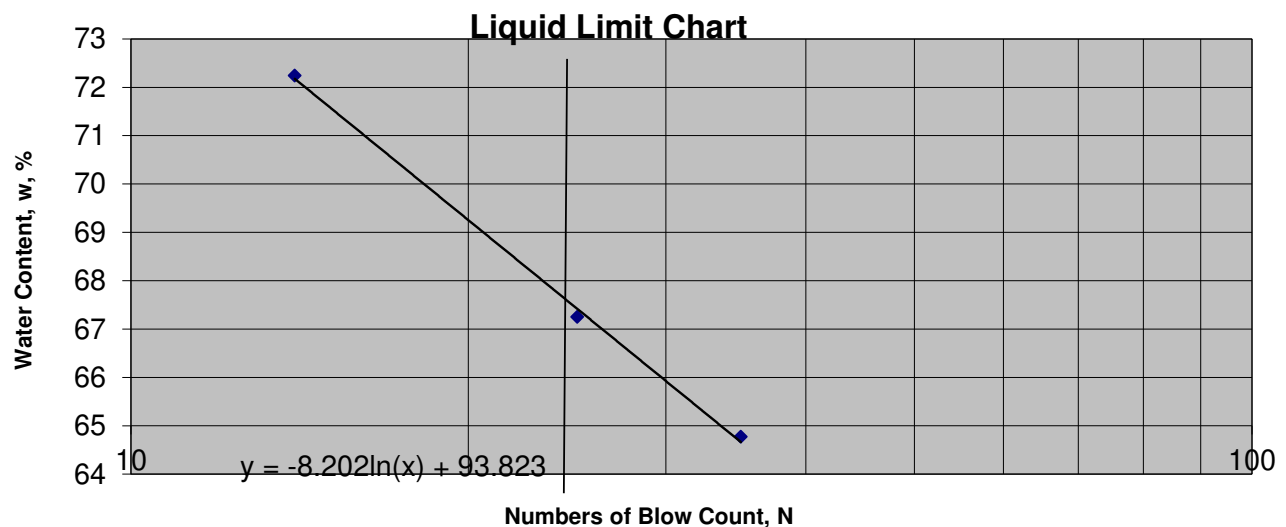

TECHNICIAN: CP	REVIEWED BY:	C. Beadow	J. Forsyth, P. Eng.




**PATERSON
GROUP**

**ATTERBERG LIMITS
LS-703/704**

CLIENT:	Ironclad Developments	FILE NO.:	PG7418
PROJECT:	475 Terry Fox Drive	DATE SAMPLED:	-
LOCATION:	BH 5A-25-SS7 @ 15'-17'	DATE REPORTED:	19-Feb

CAN NO.	4	11	12				
WT. OF CAN	8.68	8.66	8.74				
WT. OF SOIL & CAN	17.99	20.32	19.62				
WT. OF DRY SOIL & CAN	14.71	16.30	15.92				
WT. OF MOISTURE	3.28	4.02	3.7				
WT. OF DRY SOIL & CAN	6.03	7.64	7.18				
WATER CONTENT, w, %	54.39	52.62	51.53				
NO. OF BLOWS, N	16	26	36				

			RESULTS	
CAN NO.	2	18	LIQUID LIMIT	53
WT. OF CAN	19.93	20.02	PLASTIC LIMIT	24
WT. OF SOIL & CAN	28.43	28.10	PLASTICITY INDEX	29
WT. OF DRY SOIL & CAN	26.79	26.56		
WT. OF MOISTURE	1.64	1.54		
WT. OF DRY SOIL & CAN	6.86	6.54		
WATER CONTENT, w, %	23.91	23.55		

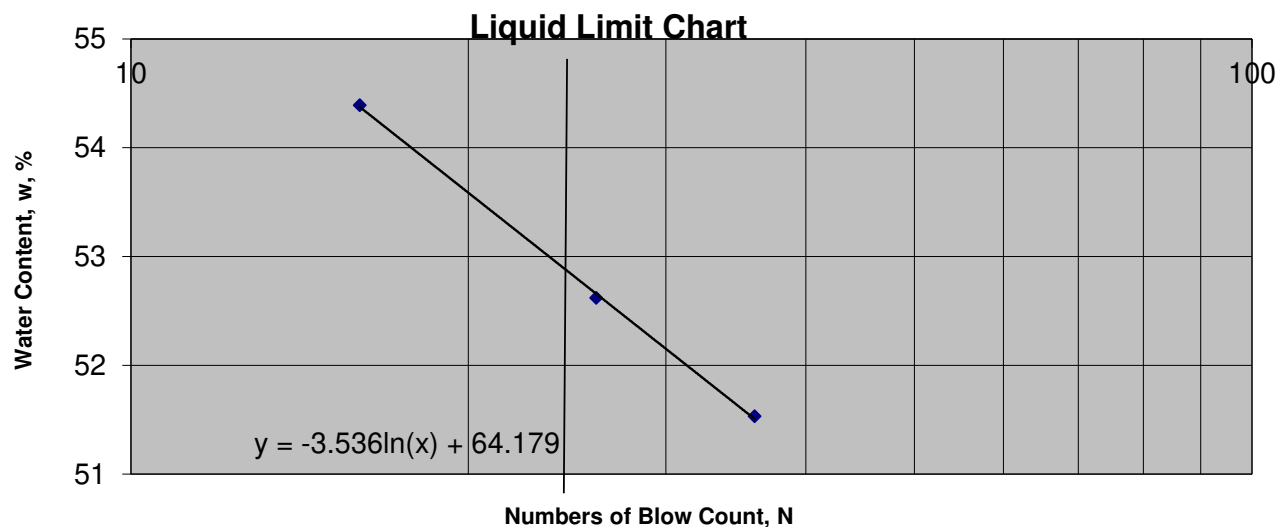

TECHNICIAN: CP		C. Beadow	J. Forsyth, P. Eng.
	REVIEWED BY:		

CLIENT:	Ironclad Developments	DEPTH	7'6" - 9'6"	FILE NO.:	PG7418
PROJECT:	475 Terry Fox Drive, Ottawa	BH OR TP No:	BH 2-25 - SS4	DATE SAMPLED	-
LAB No:	58924	TESTED BY:	C.P	DATE RECEIVED	10-Feb-25
SAMPLED BY:	N.V.	DATE REPORTED:	19-Feb-25	DATE TESTED	11-Feb-25

LABORATORY INFORMATION & TEST RESULTS


Moisture	No. of Blows(7)	Calibration (Two Trials)	Tin NO.(A1)
Tare	4.94	Tin	4.77
Soil Pat Wet + Tare	61.49	Tin + Grease	4.93
Soil Pat Wet	56.55	Glass	43.25
Soil Pat Dry + Tare	35.2	Tin + Glass + Water	85.62
Soil Pat Dry	30.26	Volume	37.44
Moisture	86.88	Average Volume	37.43


Soil Pat + String	30.39
Soil Pat + Wax + String in Air	33.5
Soil Pat + Wax + String in Water	13.01
Volume Of Pat (Vdx)	20.49

RESULTS:

Shrinkage Limit	19.35
Shrinkage Ratio	1.780
Volumetric Shrinkage	120.233
Linear Shrinkage	23.137

REVIEWED BY:	Curtis Beadow	Joe Forsyth, P. Eng.
		

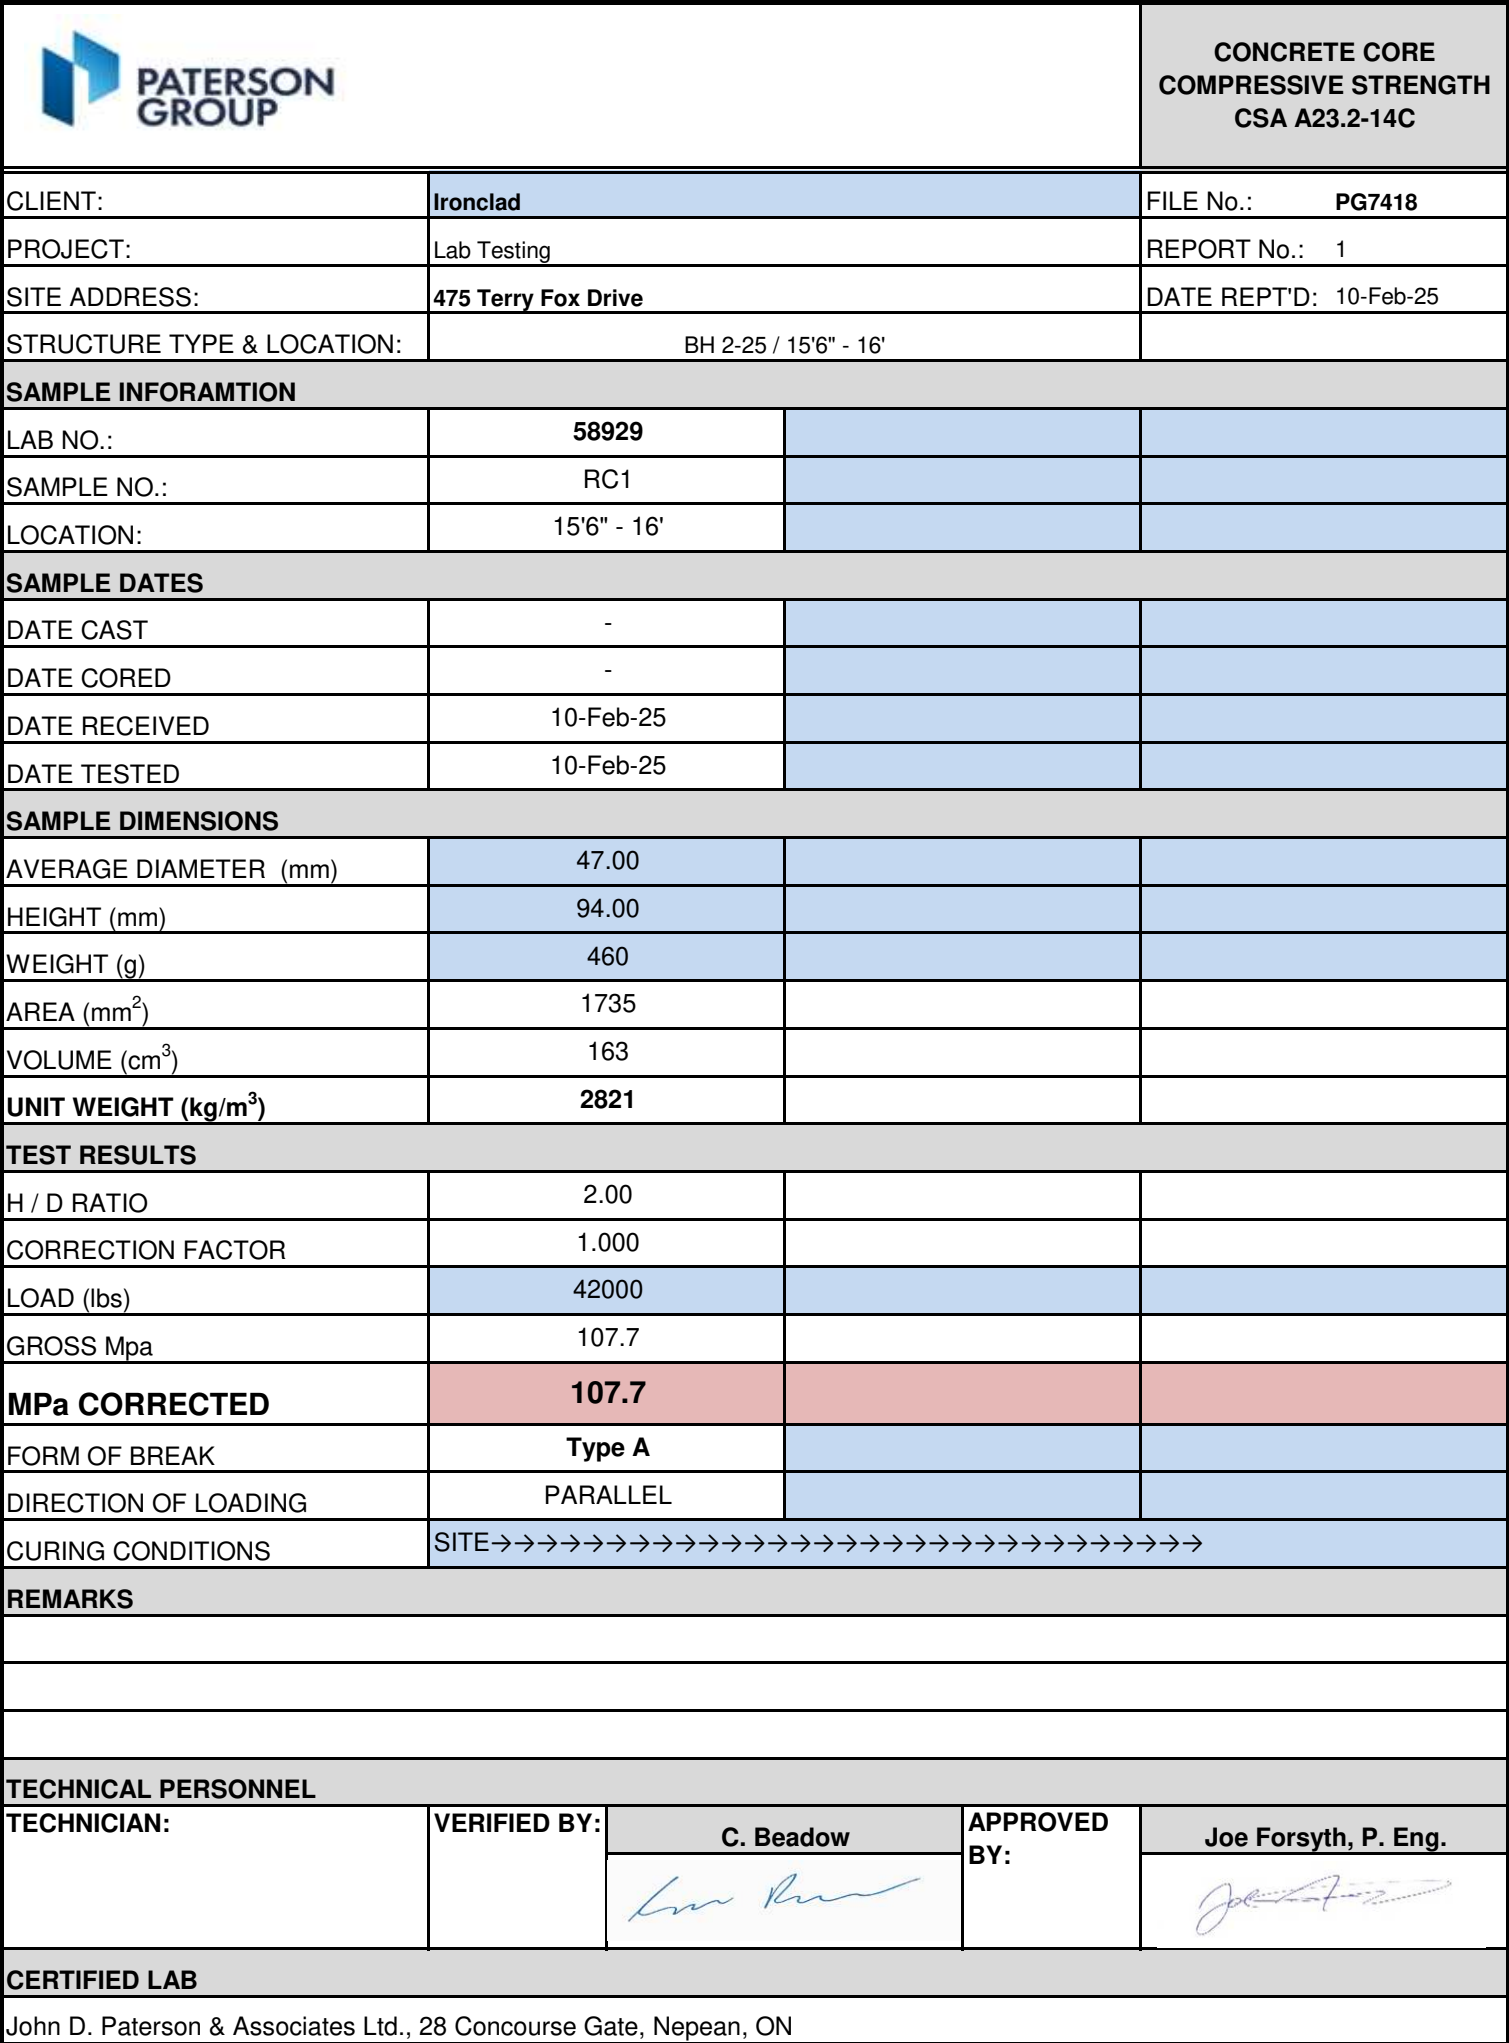

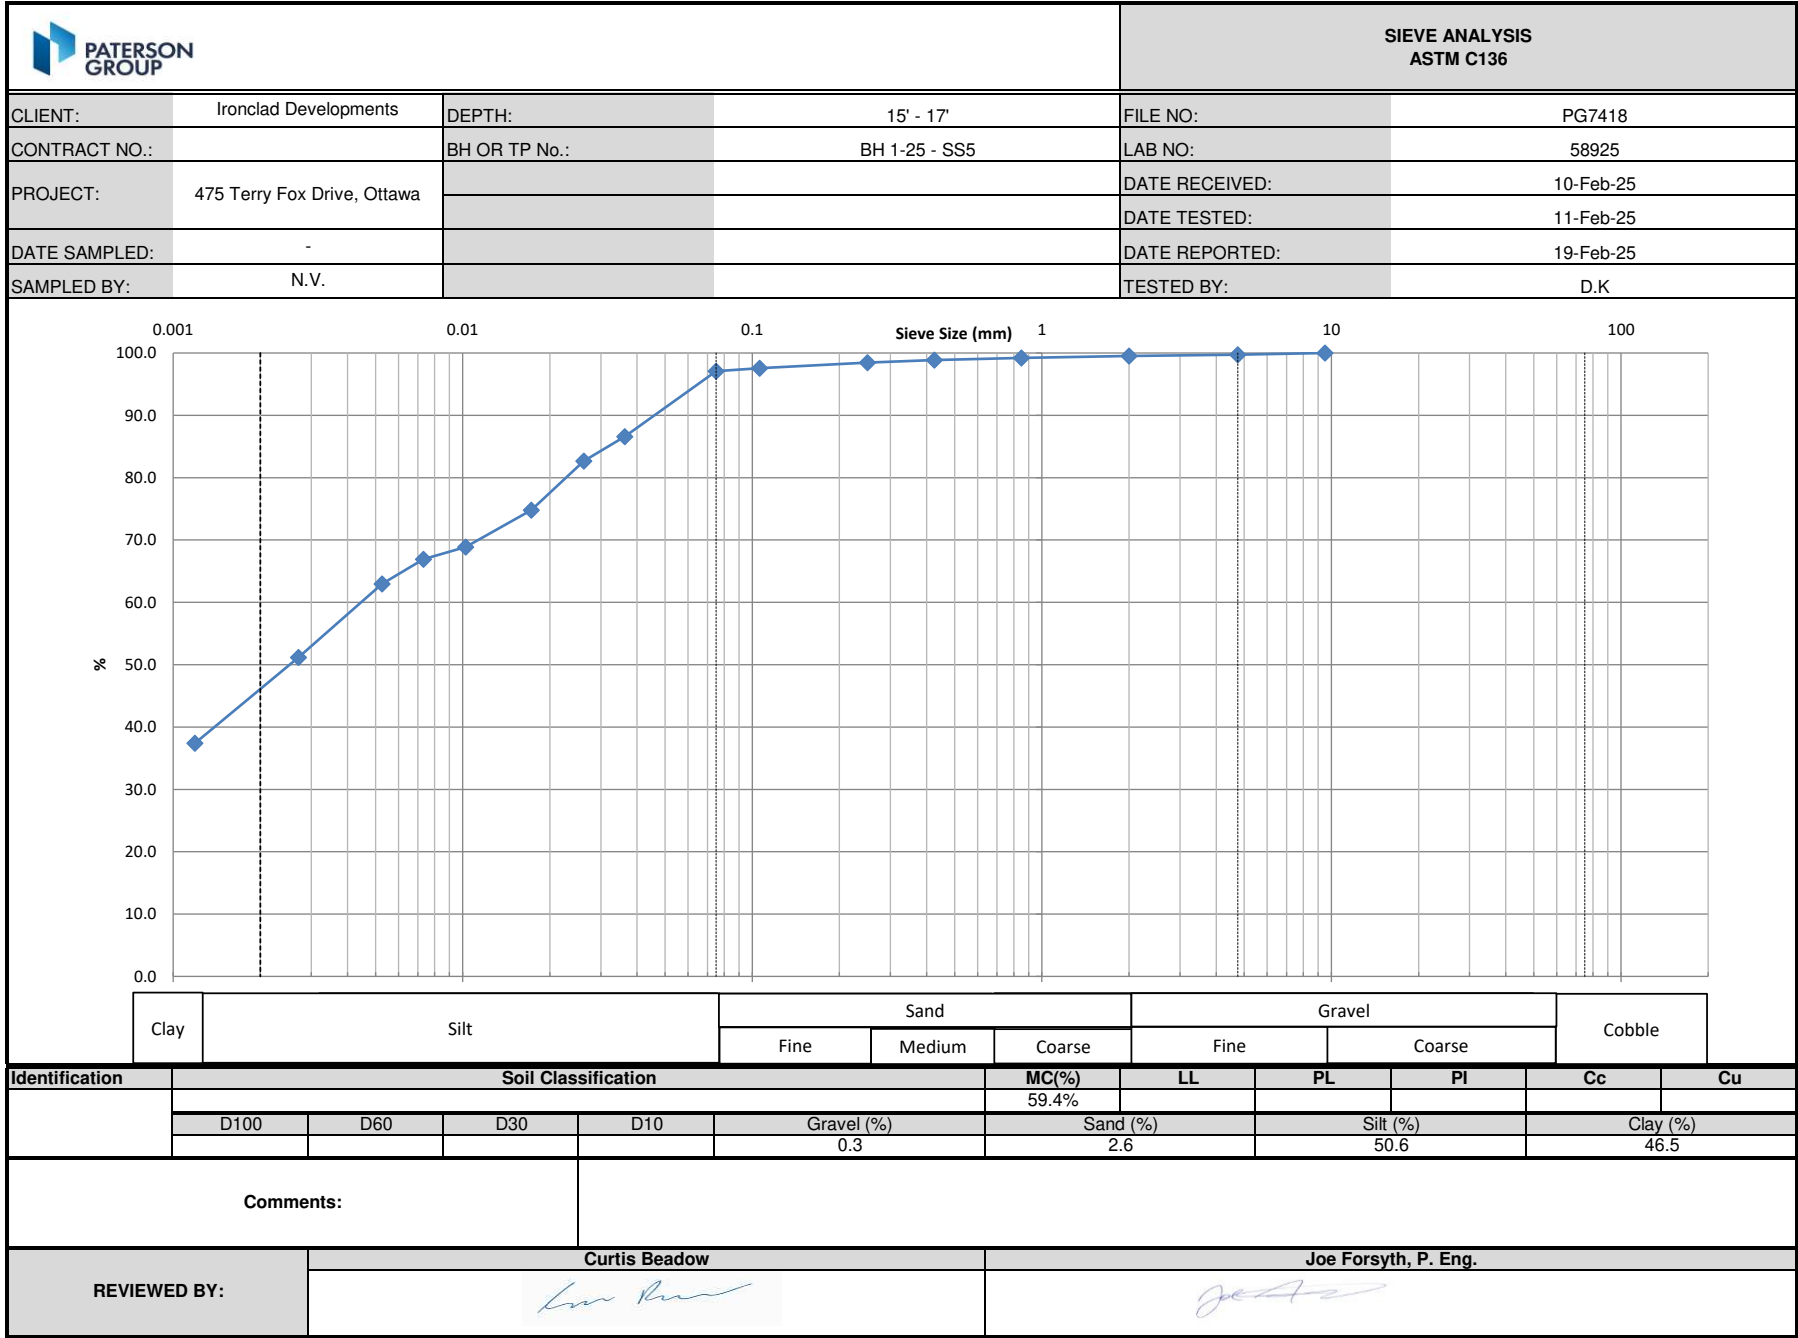

CLIENT:	Ironclad Developments	DEPTH:	15' - 17'	FILE NO.:	PG7418
PROJECT:	475 Terry Fox Drive, Ottawa	BH OR TP No.:	BH 1-25 - SS5	DATE SAMPLED:	-
LAB No. :	58925	TESTED BY:	D.K	DATE RECEIVED:	10-Feb-25
SAMPLED BY:	N.V.	DATE REPT'D:	19-Feb-25	DATE TESTED:	11-Feb-25

SAMPLE INFORMATION

SAMPLE MASS		SPECIFIC GRAVITY	
105.4		2.700	
INITIAL WEIGHT	50.00	HYGROSCOPIC MOISTURE	
WEIGHT CORRECTED	50.00	TARE WEIGHT	0.00
WT. AFTER WASH BACK SIEVE	1.26	AIR DRY	105.40
SOLUTION CONCENTRATION	40 g/L	OVEN DRY	105.40
		CORRECTED	1.000

GRAIN SIZE ANALYSIS

SIEVE DIAMETER (mm)	WEIGHT RETAINED (g)	PERCENT RETAINED	PERCENT PASSING
26.5			
19			
13.2			
9.5	0.0	0.0	100.0
4.75	0.3	0.3	99.7
2.0	0.5	0.5	99.5
Pan	104.9		
0.850	0.16	0.8	99.2
0.425	0.33	1.1	98.9
0.250	0.53	1.5	98.5
0.106	0.98	2.4	97.6
0.075	1.23	2.9	97.1
Pan	1.26		
SIEVE CHECK	0.0	MAX = 0.3%	

HYDROMETER DATA


ELAPSED	TIME (24 hours)	Hs	Hc	Temp. (°C)	DIAMETER	(P)	TOTAL PERCENT PASSING
1	07:48	50.0	6.0	23.0	0.0363	87.0	86.6
2	07:49	48.0	6.0	23.0	0.0262	83.1	82.7
5	07:52	44.0	6.0	23.0	0.0173	75.1	74.8
15	08:02	41.0	6.0	23.0	0.0102	69.2	68.9
30	08:17	40.0	6.0	23.0	0.0073	67.2	66.9
60	08:47	38.0	6.0	23.0	0.0053	63.3	63.0
250	11:57	32.0	6.0	23.0	0.0027	51.4	51.2
1440	07:47	25.0	6.0	23.0	0.0012	37.6	37.4

Moisture = 59.4%

REVIEWED BY:	C. Beadow	Joe Forsyth, P. Eng.
		

**SIEVE ANALYSIS
ASTM C136**

CLIENT:	Ironclad Developments	DEPTH:	30' - 32'	FILE NO:	PG7418
CONTRACT NO.:		BH OR TP No.:	BH 1-25 SS8	LAB NO:	58928
PROJECT:	475 Terry Fox Drive, Ottawa			DATE RECEIVED:	10-Feb-25
DATE SAMPLED:	-			DATE TESTED:	11-Feb-25
SAMPLED BY:	N.V.			DATE REPORTED:	19-Feb-25
				TESTED BY:	D.K

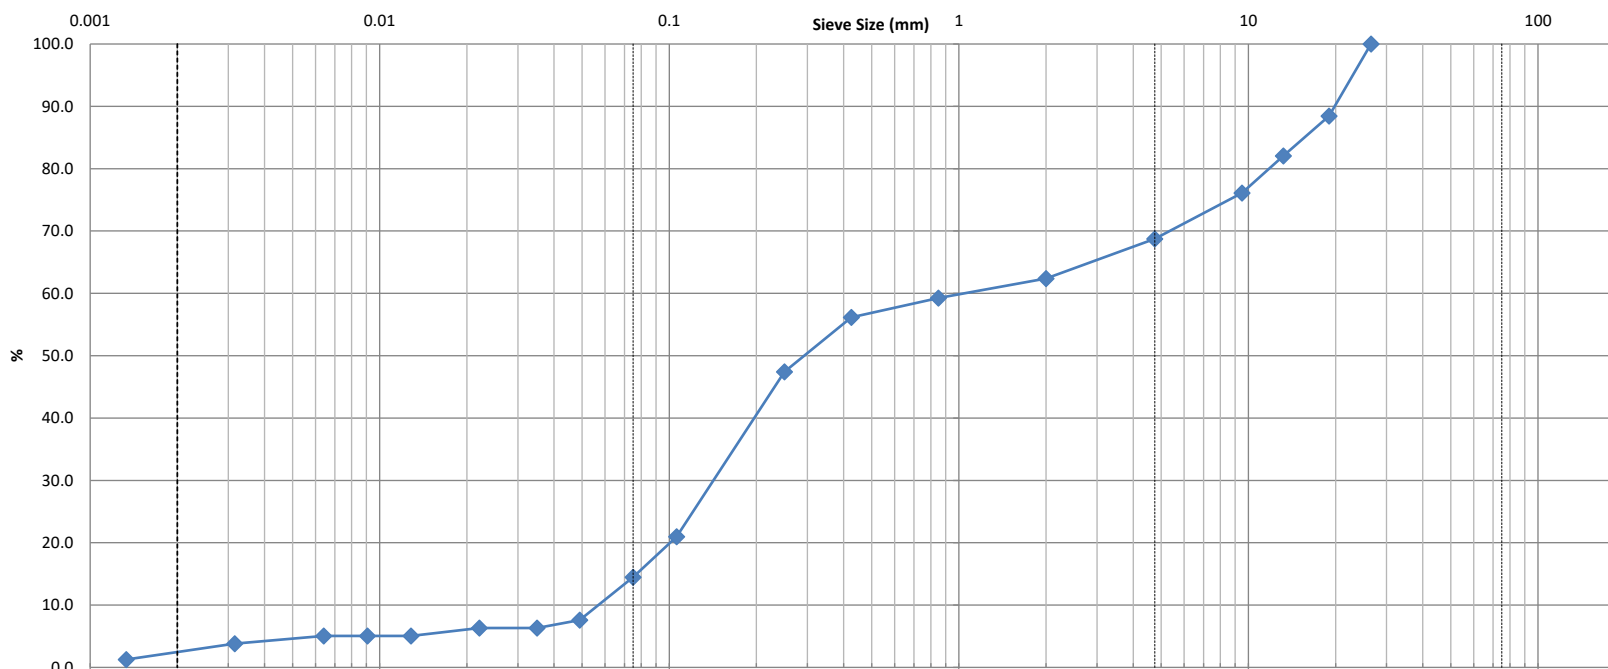

Clay	Silt		Sand			Gravel		Cobble
			Fine	Medium	Coarse	Fine	Coarse	

Identification	Soil Classification					MC(%)	LL	PL	PI	Cc	Cu
	D100	D60	D30	D10	Gravel (%)	12.7%					
					31.3	54.3				2.2	

Comments:

REVIEWED BY:

Curtis Beadow

Joe Forsyth, P. Eng.

CLIENT:	Ironclad Developments	DEPTH:	30' - 32'	FILE NO.:	PG7418
PROJECT:	475 Terry Fox Drive, Ottawa	BH OR TP No.:	BH 1-25 SS8	DATE SAMPLED:	-
LAB No. :	58928	TESTED BY:	D.K	DATE RECEIVED:	10-Feb-25
SAMPLED BY:	N.V.	DATE REPT'D:	19-Feb-25	DATE TESTED:	11-Feb-25

SAMPLE INFORMATION

SAMPLE MASS		SPECIFIC GRAVITY	
517.9		2.700	
INITIAL WEIGHT	50.00	HYGROSCOPIC MOISTURE	
WEIGHT CORRECTED	48.75	TARE WEIGHT	0.00
WT. AFTER WASH BACK SIEVE	40.00	AIR DRY	530.00
SOLUTION CONCENTRATION	40 g/L	OVEN DRY	516.70
		CORRECTED	0.975

GRAIN SIZE ANALYSIS

SIEVE DIAMETER (mm)	WEIGHT RETAINED (g)	PERCENT RETAINED	PERCENT PASSING
26.5	0.0	0.0	100.0
19	59.9	11.6	88.4
13.2	93.0	17.9	82.1
9.5	123.7	23.9	76.1
4.75	161.9	31.3	68.7
2.0	194.8	37.6	62.4
Pan	323.1		
0.850	2.52	40.8	59.2
0.425	4.99	43.8	56.2
0.250	12.00	52.6	47.4
0.106	33.20	79.0	21.0
0.075	38.40	85.5	14.5
Pan	40.00		
SIEVE CHECK	0.0	MAX = 0.3%	

HYDROMETER DATA

ELAPSED	TIME (24 hours)	Hs	Hc	Temp. (°C)	DIAMETER	(P)	TOTAL PERCENT PASSING
1	07:47	12.0	6.0	23.0	0.0491	12.2	7.6
2	07:48	11.0	6.0	23.0	0.0349	10.1	6.3
5	07:51	11.0	6.0	23.0	0.0221	10.1	6.3
15	08:01	10.0	6.0	23.0	0.0128	8.1	5.1
30	08:16	10.0	6.0	23.0	0.0091	8.1	5.1
60	08:46	10.0	6.0	23.0	0.0064	8.1	5.1
250	11:56	9.0	6.0	23.0	0.0032	6.1	3.8
1440	07:46	7.0	6.0	23.0	0.0013	2.0	1.3

Moisture = 12.7%

REVIEWED BY:	C. Beadow	Joe Forsyth, P. Eng.
		

Certificate of Analysis

Report Date: 13-Feb-2025

Client: Paterson Group Consulting Engineers (Ottawa)

Order Date: 10-Feb-2025

Client PO: 62347

Project Description: PG7418

Client ID:	BH 5A-25 SS4	-	-	-	
Sample Date:	07-Feb-25 16:00	-	-	-	-
Sample ID:	2507065-01	-	-	-	
Matrix:	Soil	-	-	-	
MDL/Units					

Physical Characteristics


% Solids	0.1 % by Wt.	59.4	-	-	-	-
----------	--------------	------	---	---	---	---

General Inorganics

pH	0.05 pH Units	7.25	-	-	-	-
Resistivity	0.1 Ohm.m	33.2	-	-	-	-

Anions

Chloride	10 ug/g	58	-	-	-	-
Sulphate	10 ug/g	103	-	-	-	-

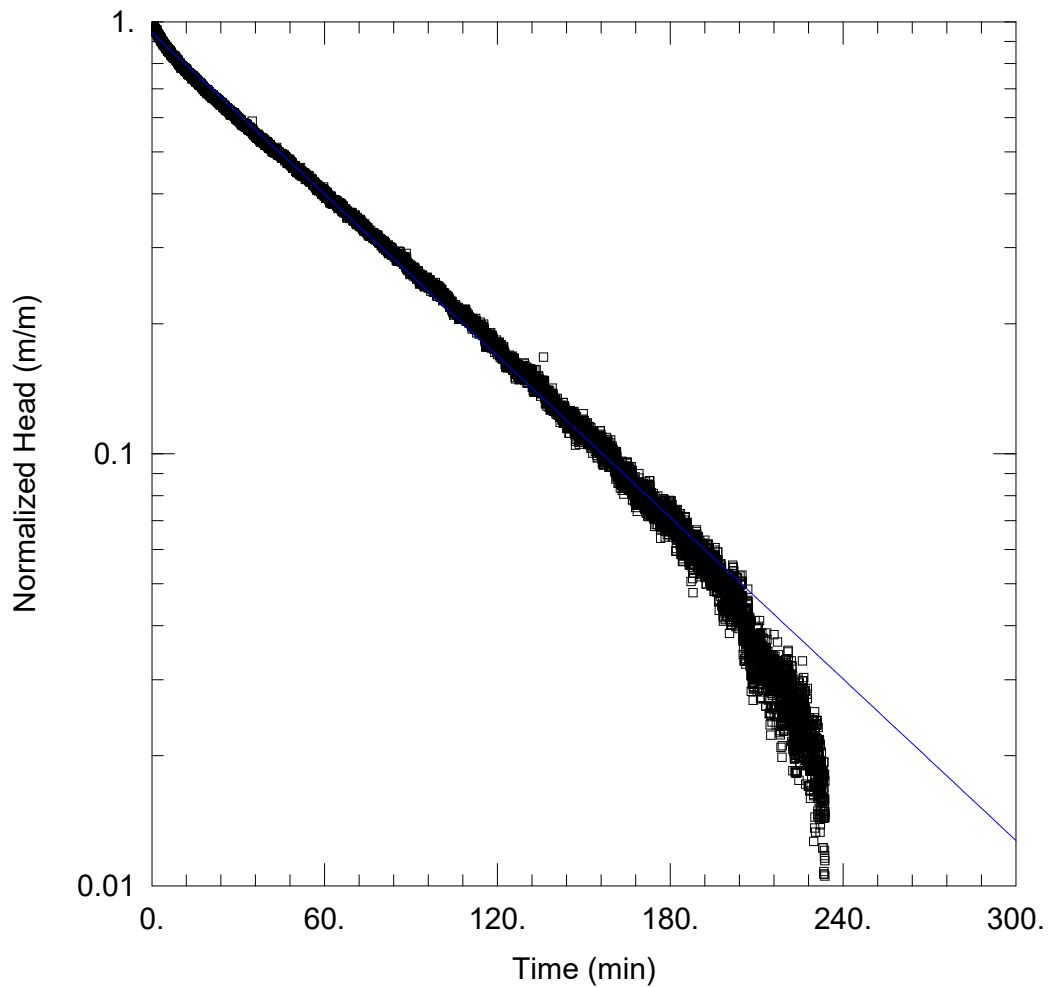

BH1-25 FALLING HEAD 1 OF 1

PROJECT INFORMATION


Company: Paterson Group
 Client: Ironclad Developments Inc.
 Project: PG7418
 Location: 475 Terry Fox Drive
 Test Well: BH1-25
 Test Date: February 18, 2025

WELL DATA (BH1-25)

Initial Displacement: <u>0.47 m</u>	Static Water Column Height: <u>6.75 m</u>
Total Well Penetration Depth: <u>6.75 m</u>	Screen Length: <u>1.524 m</u>
Casing Radius: <u>0.0254 m</u>	Well Radius: <u>0.1048 m</u>

SOLUTION

Aquifer Model: <u>Confined</u>	Solution Method: <u>Hvorslev</u>
K = <u>2.29E-7 m/sec</u>	y0 = <u>0.4436 m</u>

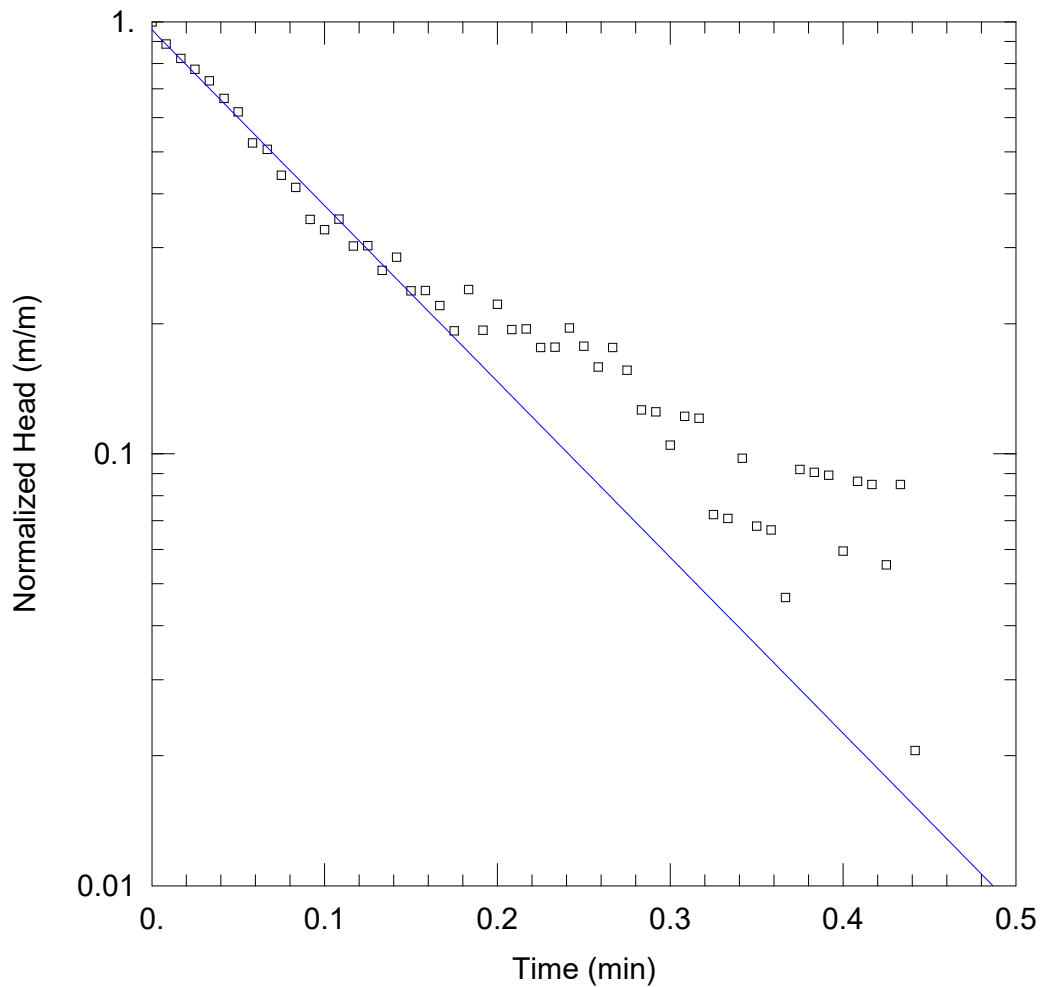

BH2-25 FALLING HEAD 1 OF 1

PROJECT INFORMATION


Company: Paterson Group
 Client: Ironclad Developments Inc.
 Project: PG7418
 Location: 475 Terry Fox Drive
 Test Well: BH2-25
 Test Date: February 18, 2025

WELL DATA (BH2-25)

Initial Displacement: <u>0.062 m</u>	Static Water Column Height: <u>4.765 m</u>
Total Well Penetration Depth: <u>4.765 m</u>	Screen Length: <u>1.524 m</u>
Casing Radius: <u>0.01588 m</u>	Well Radius: <u>0.0381 m</u>

SOLUTION

Aquifer Model: <u>Confined</u>	Solution Method: <u>Hvorslev</u>
K = <u>7.148E-5 m/sec</u>	y0 = <u>0.05941 m</u>

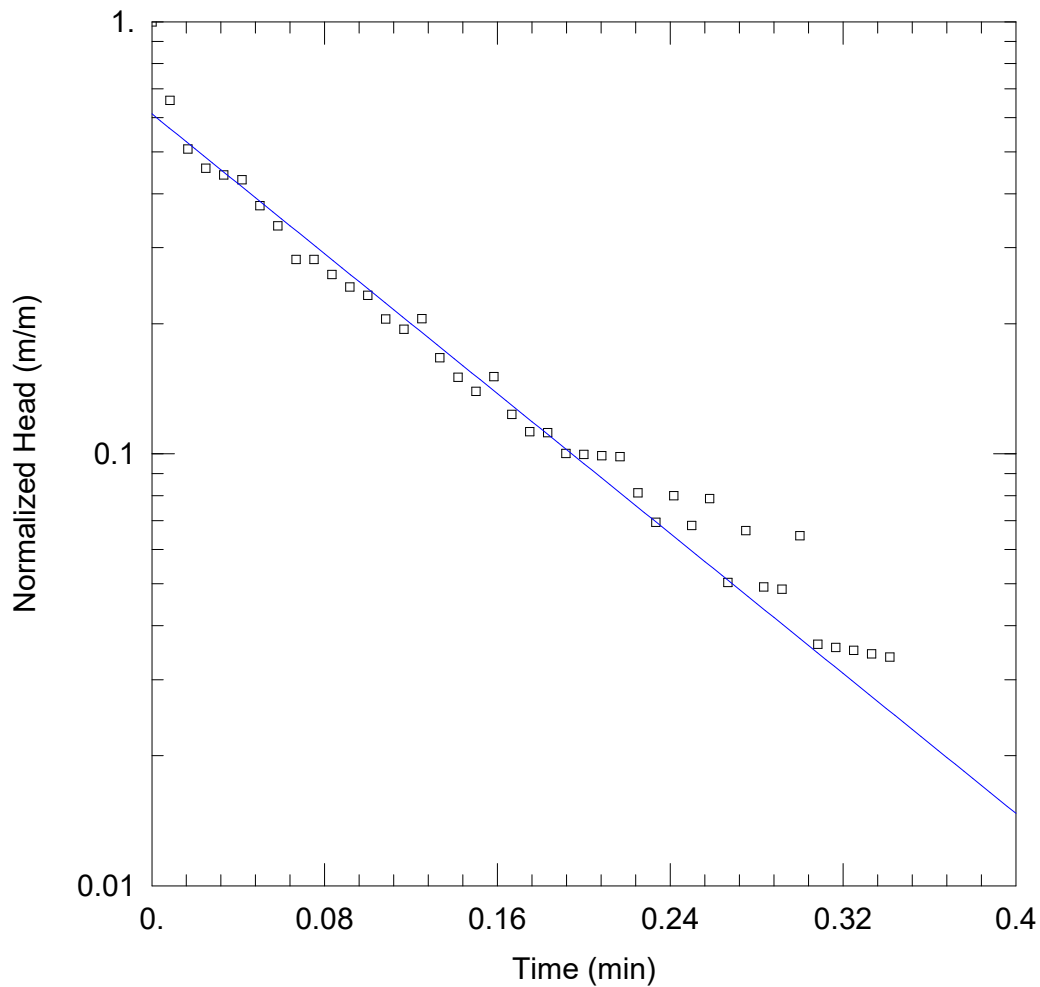

BH2-25 RISING HEAD 1 OF 1

PROJECT INFORMATION

Company: Paterson Group
Client: Ironclad Developments Inc.
Project: PG7418
Location: 475 Terry Fox Drive
Test Well: BH2-25
Test Date: February 18, 2025

WELL DATA (BH2-25)

Initial Displacement: 0.105 m
Total Well Penetration Depth: 4.765 m
Casing Radius: 0.01588 m
Static Water Column Height: 4.765 m
Screen Length: 1.524 m
Well Radius: 0.0381 m

SOLUTION

Aquifer Model: Confined
K = 7.109E-5 m/sec
Solution Method: Hvorslev
y0 = 0.0643 m

APPENDIX 2

FIGURE 1 – KEY PLAN


FIGURE 1A & FIGURE 1B – GLOBAL STABILITY ANALYSIS RESULTS

FIGURE 2 & 3 – SEISMIC SHEAR WAVE VELOCITY PROFILES


FIGURE 4 – TYPICAL RETAINING WALL CROSS-SECTION

DRAWING PG7418-1 – TEST HOLE LOCATION PLAN

DRAWING PG7418-2 – PERMISSIBLE GRADE RAISE PLAN

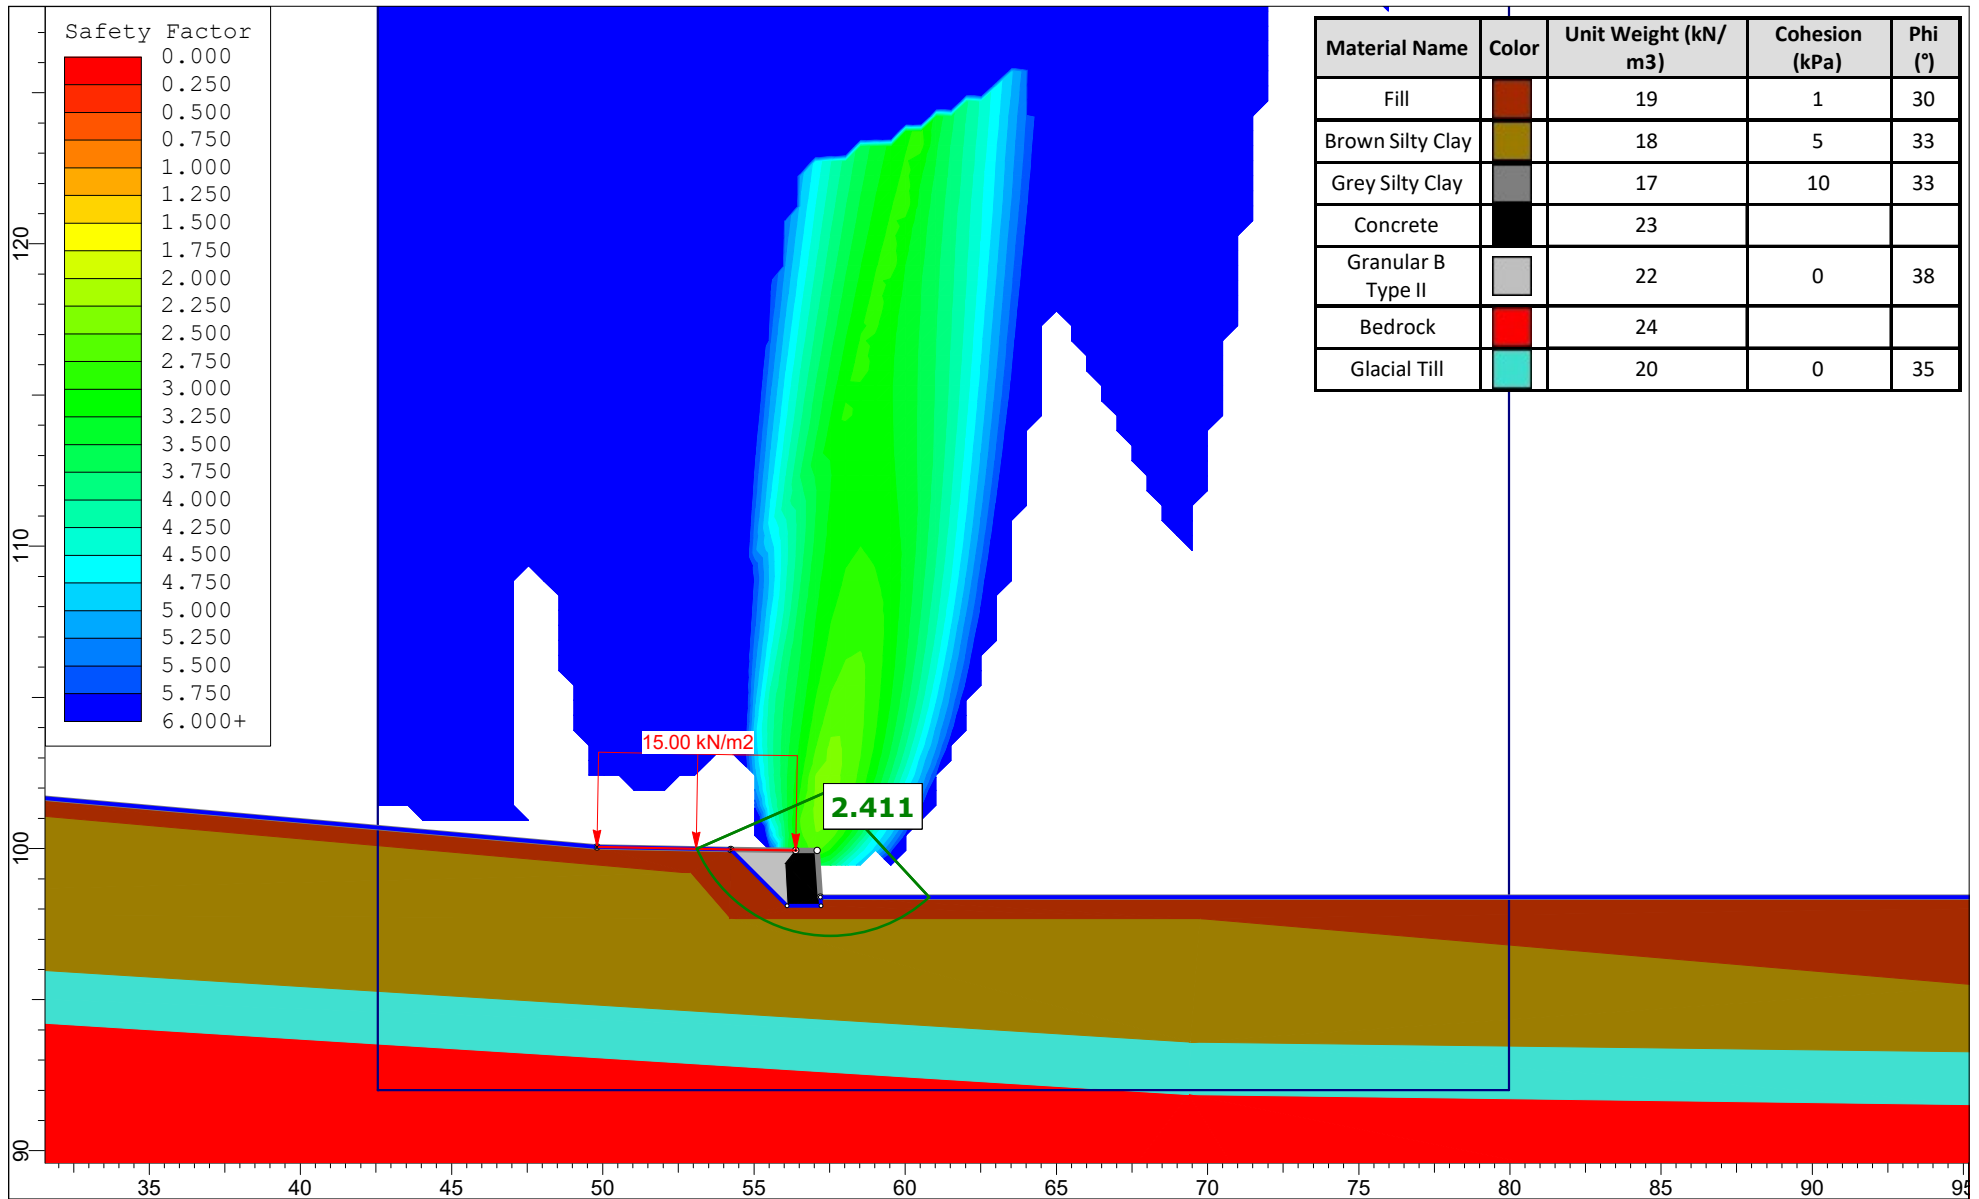

 SLIDEINTERPRET 9.031	Project Ironclad Developments Inc. Slope Stability Analysis 475 Terry Fox Drive, Ottawa, Ontario	
	Figure No. Figure 1A - Section A - Proposed Conditions - Static Loading	
	Drawn by: NFRV	Company: Paterson Group
	Date: 2026-01-05	File No. PG7418

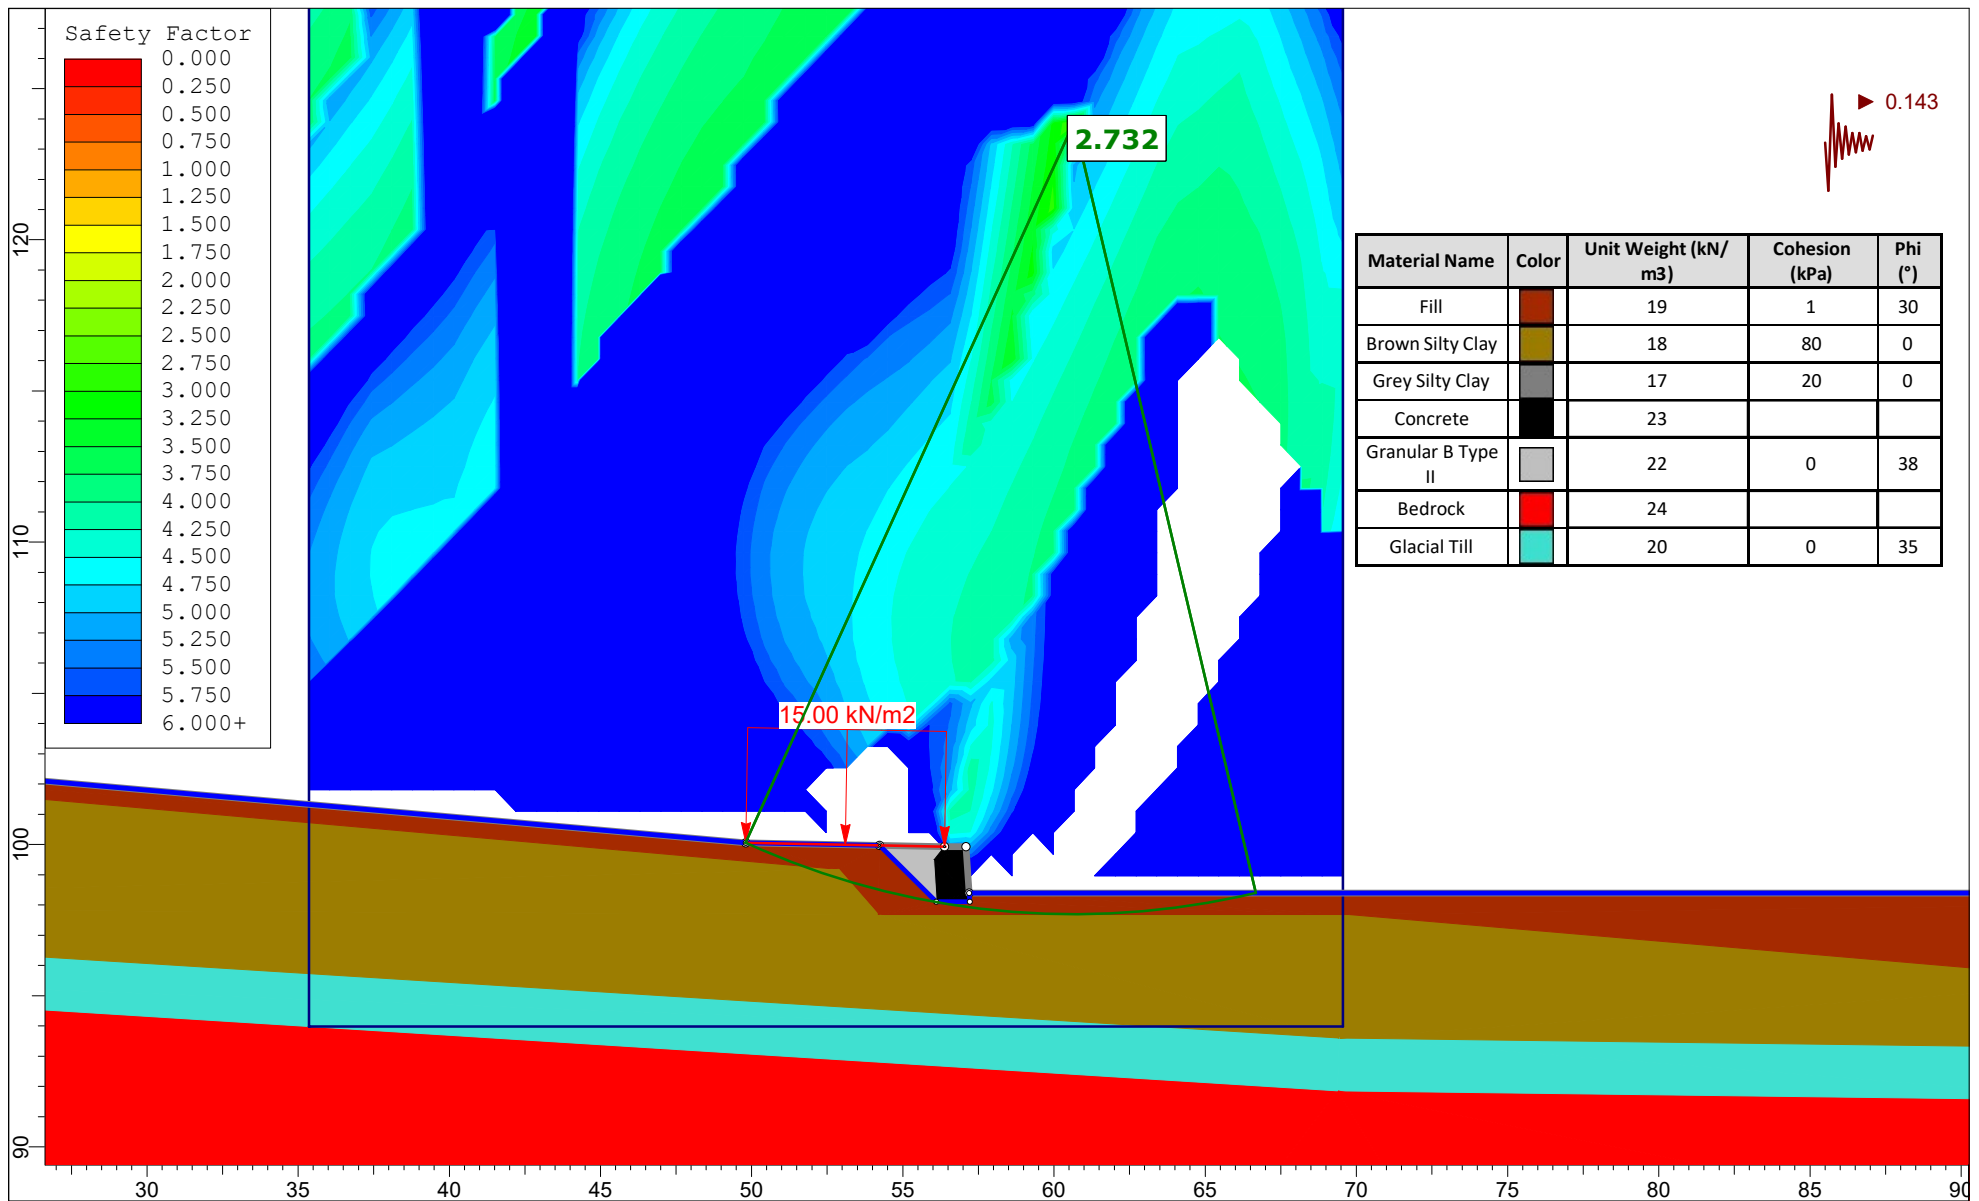

 SLIDEINTERPRET 9.031	Project	Ironclad Developments Inc.	
		Slope Stability Analysis	
		475 Terry Fox Drive, Ottawa, Ontario	
	Figure No.	Figure 1B - Section A - Proposed Conditions - Seismic Loading	
Drawn by:	NFRV	Company:	Paterson Group
Date:	2026-01-05	File No.	PG7418

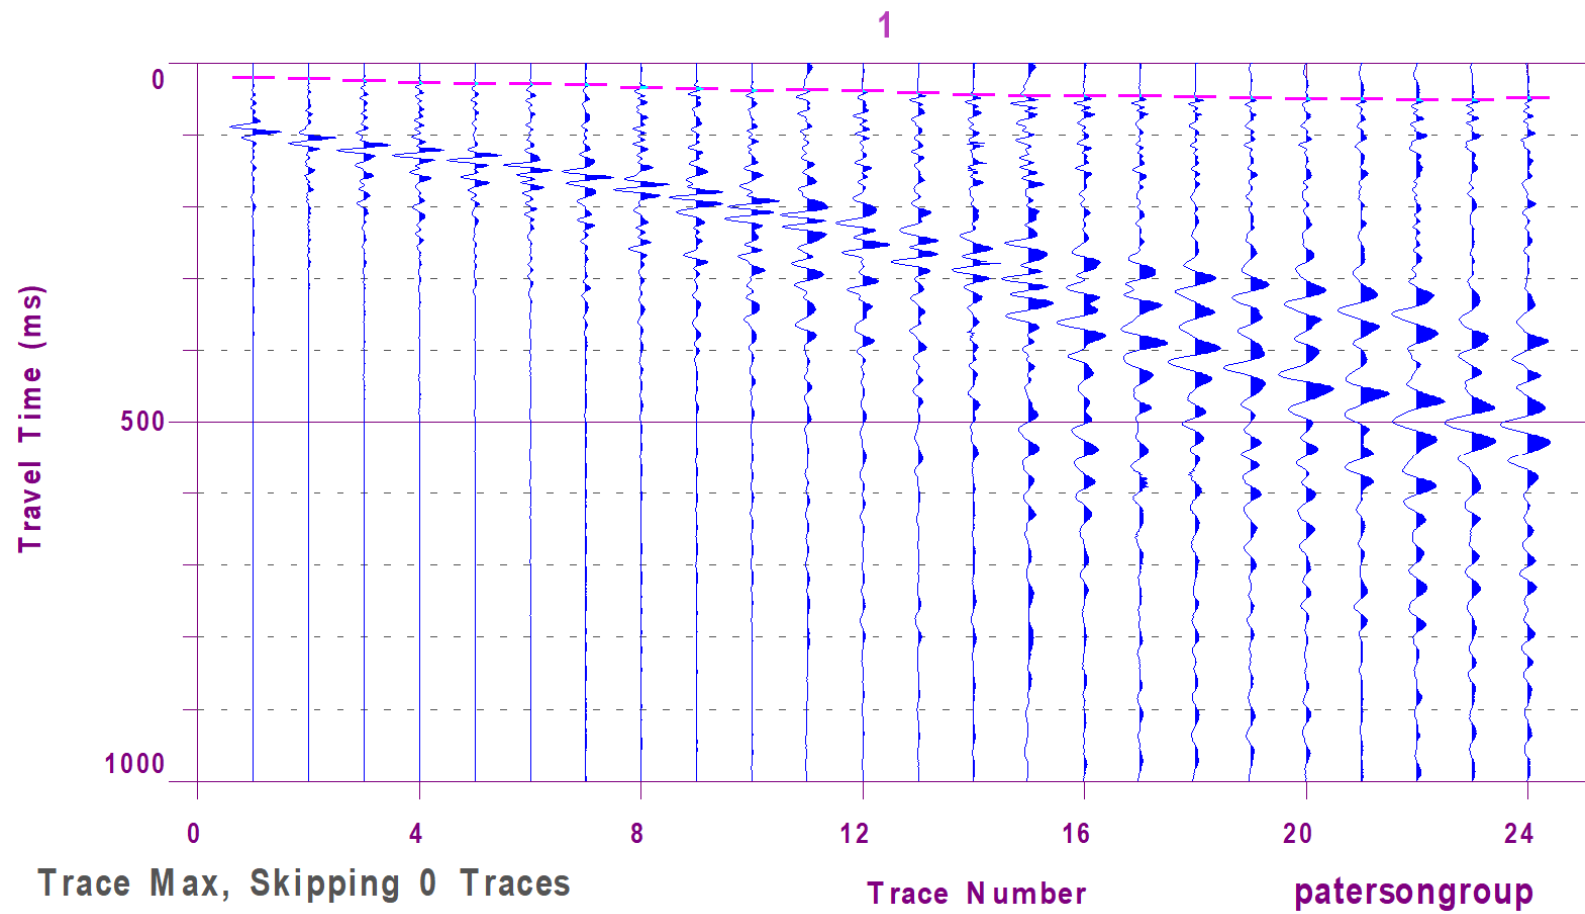


Figure 2 – Shear Wave Velocity Profile at Shot Location -15 m


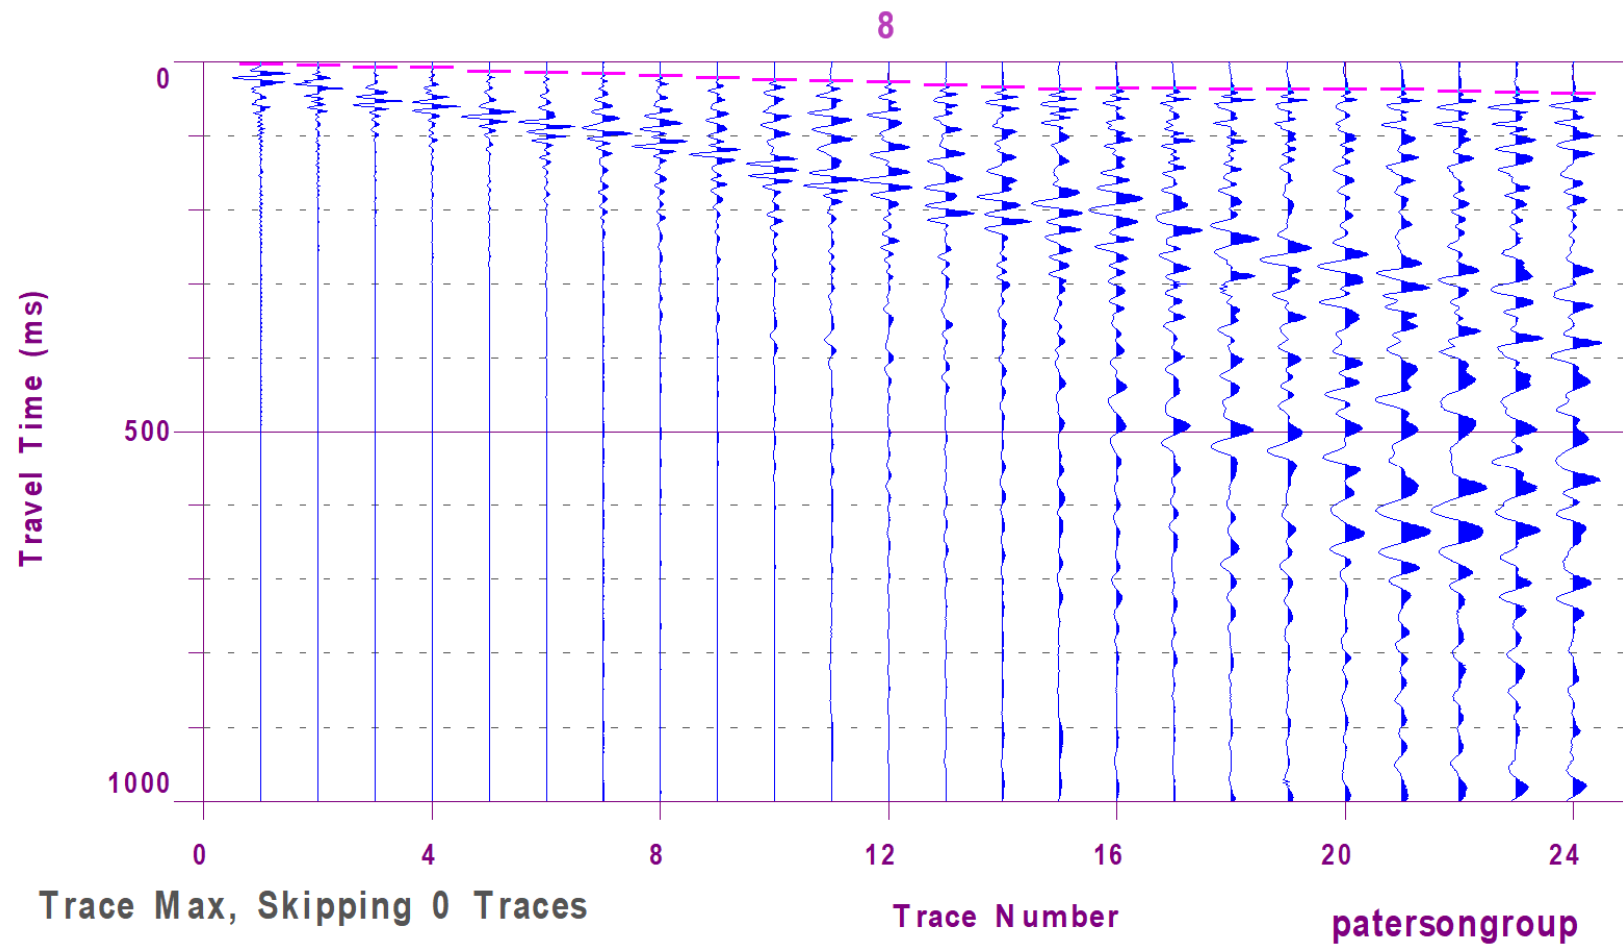


Figure 3 – Shear Wave Velocity Profile at Shot Location -3 m

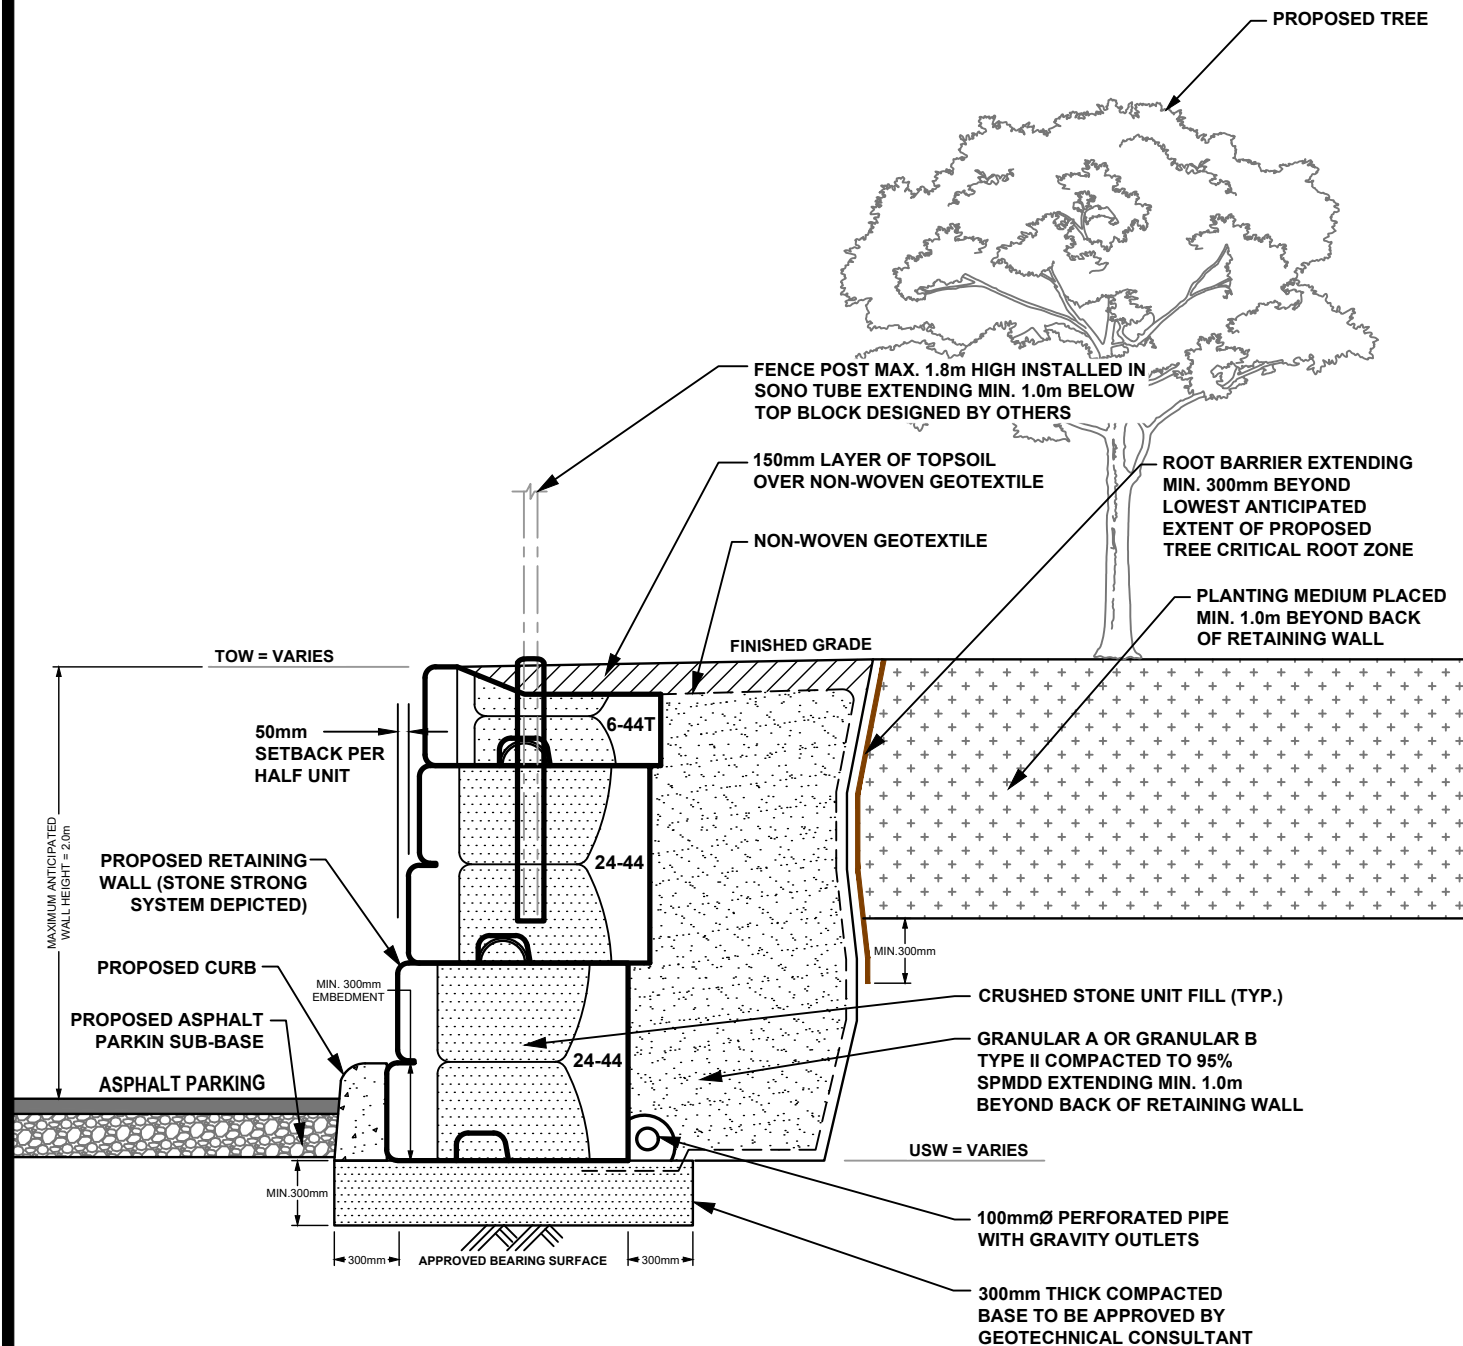

IRONCLAD DEVELOPMENTS INC.

PROPOSED RESIDENTIAL DEVELOPMENT
475 TERRY FOX DRIVE
OTTAWA, ONTARIO

Title:

**TYPICAL RETAINING
WALL CROSS-SECTION**

Date:

10/2025

Scale:

1:35

Drawn by:

NFRV

Checked by:


DP

Report No.:

PG7418

Drawing No.:

FIGURE 4

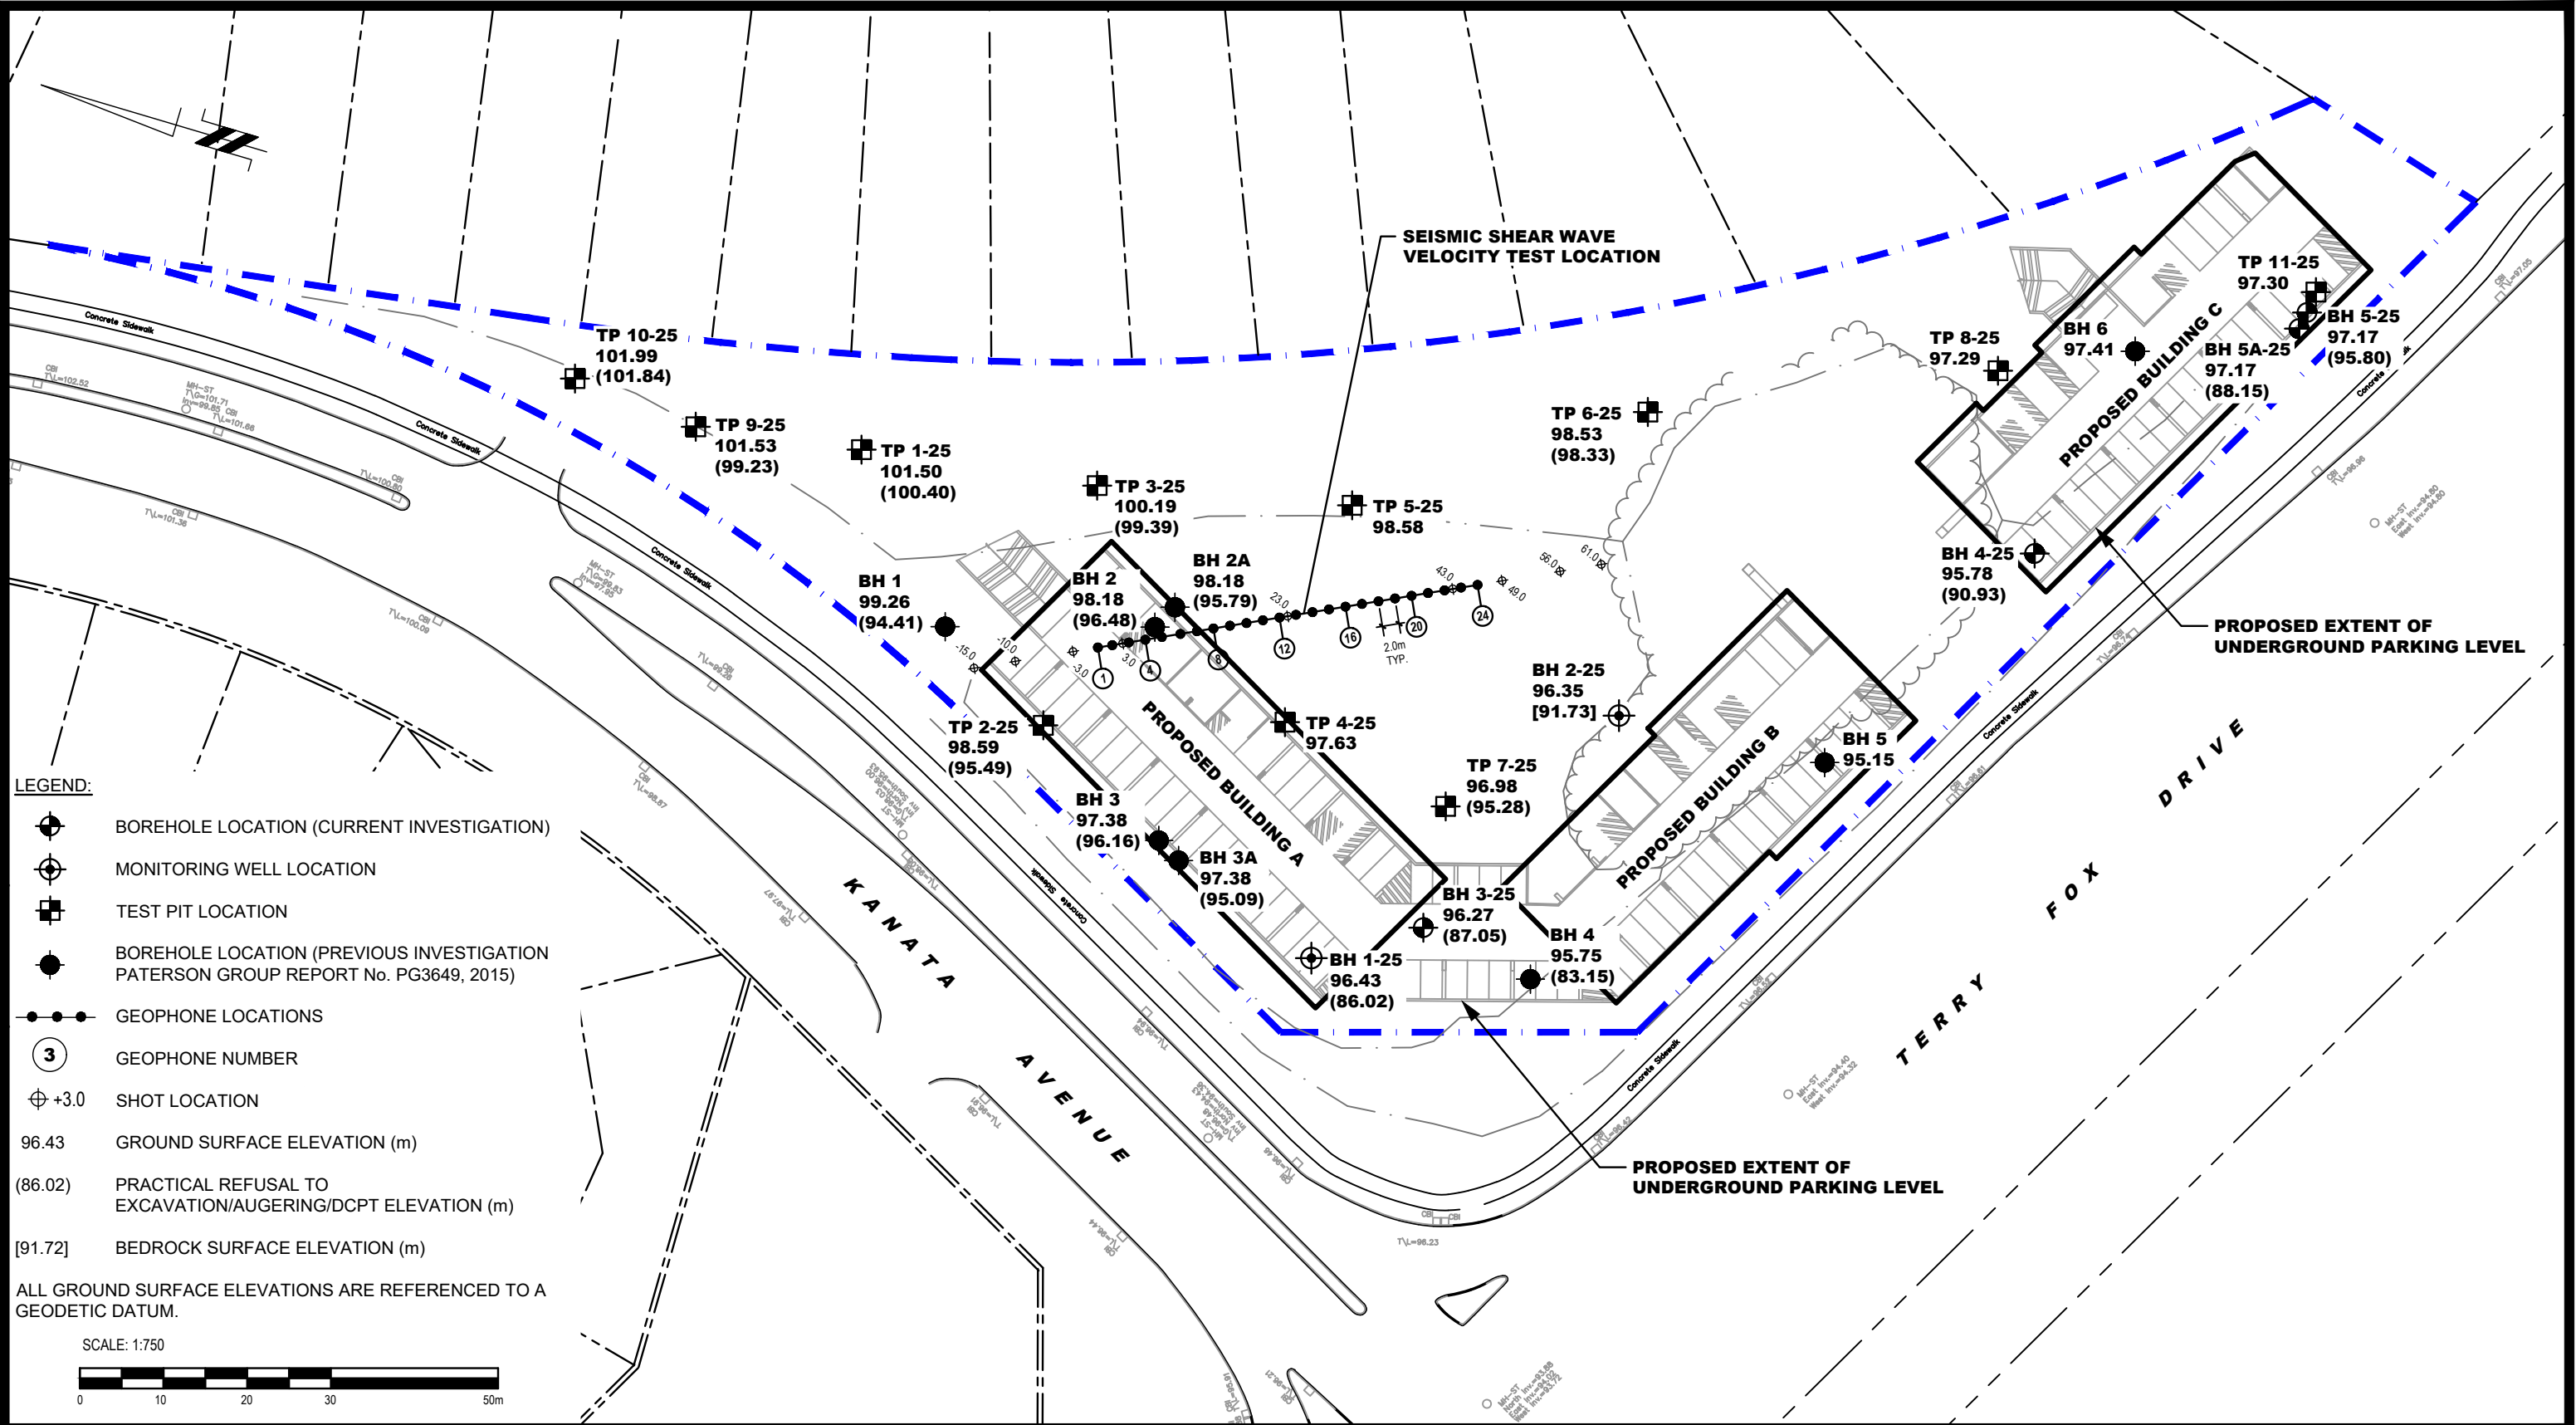

LEGEND:


- BOREHOLE LOCATION (CURRENT INVESTIGATION)
- MONITORING WELL LOCATION
- TEST PIT LOCATION
- BOREHOLE LOCATION (PREVIOUS INVESTIGATION PATERSON GROUP REPORT No. PG3649, 2015)
- GEOPHONE LOCATIONS
- GEOPHONE NUMBER
- SHOT LOCATION
- GROUND SURFACE ELEVATION (m)
- PRACTICAL REFUSAL TO EXCAVATION/AUGERING/DCPT ELEVATION (m)
- BEDROCK SURFACE ELEVATION (m)

ALL GROUND SURFACE ELEVATIONS ARE REFERENCED TO A GEODETIC DATUM.



 9 AURIGA DRIVE OTTAWA, ON K2E 7T9 TEL: (613) 226-7381					IRONCLAD DEVELOPMENTS INC. GEOTECHNICAL INVESTIGATION PROPOSED MULTI-STOREY DEVELOPMENT 475 TERRY FOX DRIVE ONTARIO	Scale: 1:750	Date: 02/2025
						Drawn by: NFRV	Report No.: PG7418-1
						Checked by: NFRV	Dwg. No.: PG7418-1
						Approved by: DP	Revision No.:
	NO.	REVISIONS	DATE	INITIAL	TEST HOLE LOCATION PLAN		

p:\autocad\drawings\geotechnical\pg74xx\pg7418\pg7418-1.thp.dwg

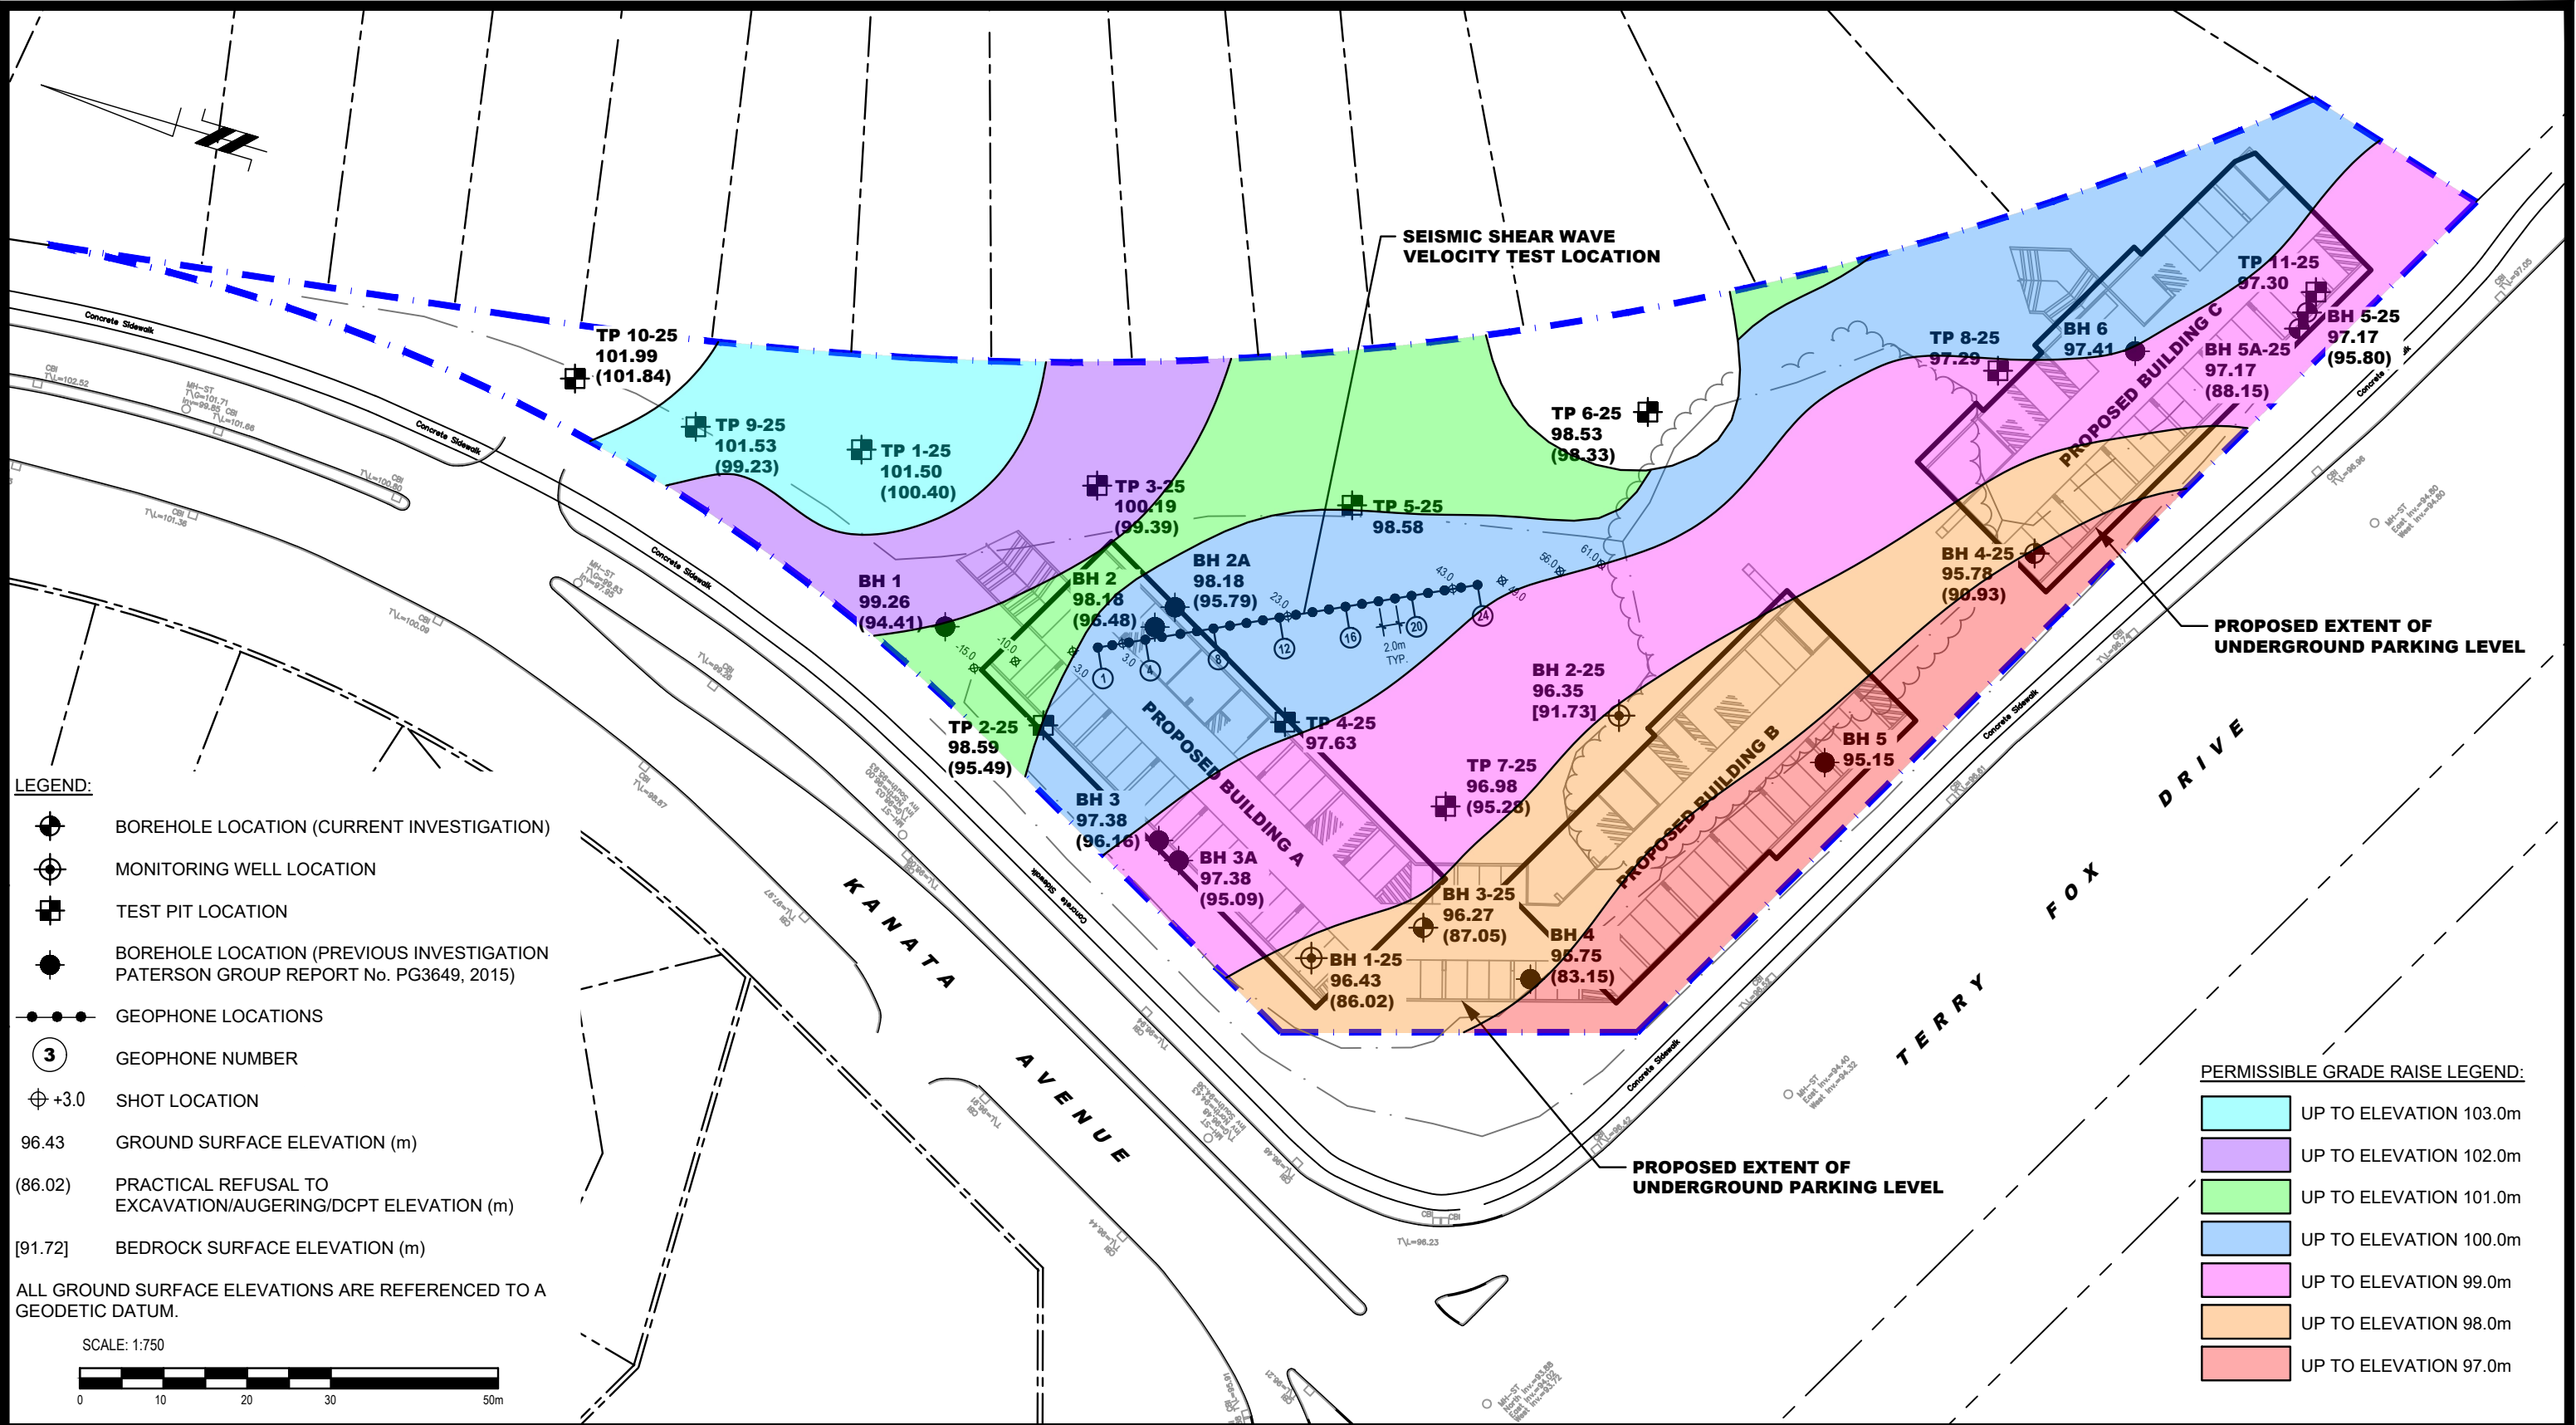

NO.	REVISIONS	DATE	INITIAL