



NOT TO SCALE

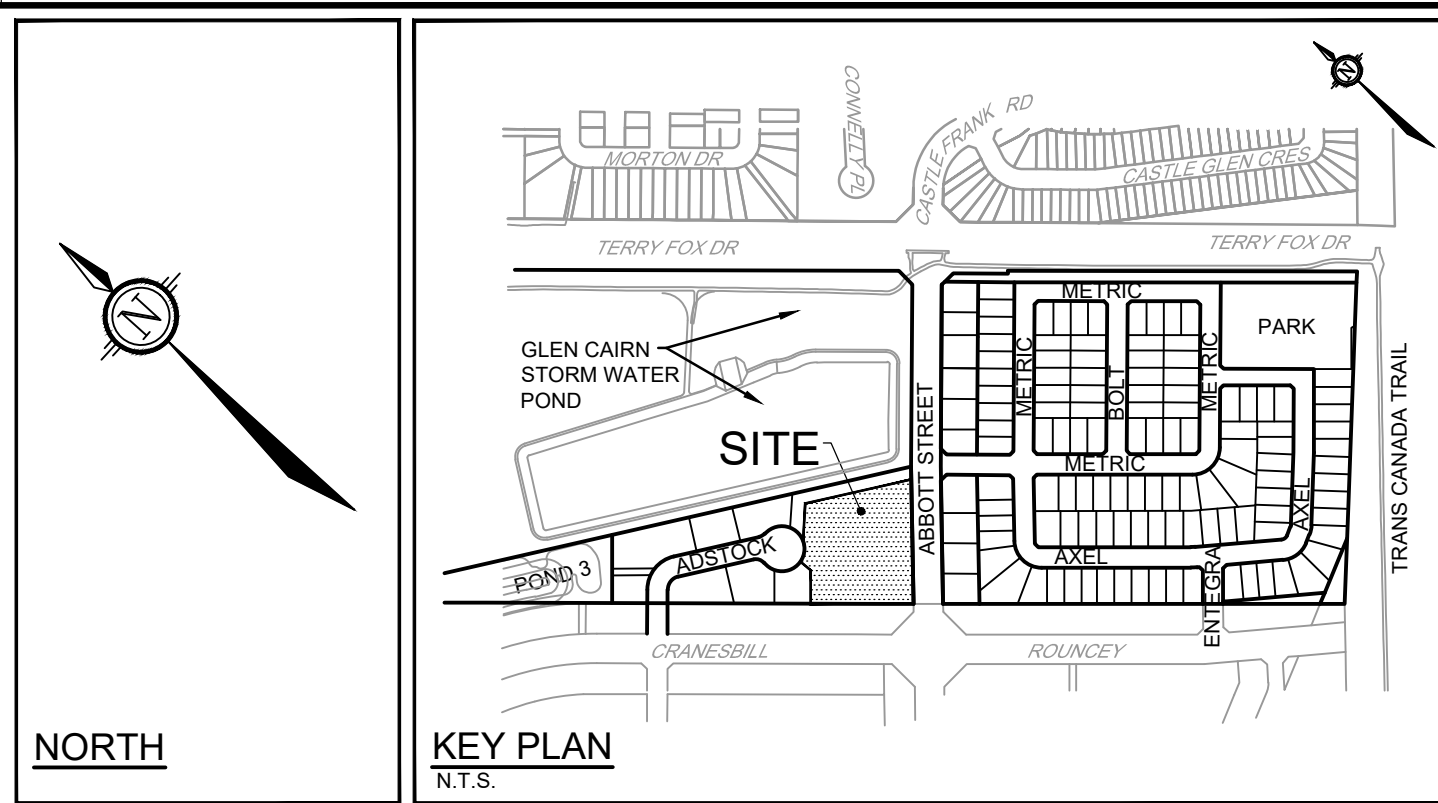

- EROSION AND SEDIMENT CONTROL NOTES:**
- THE OWNER AGREES TO PREPARE AND IMPLEMENT AN EROSION AND SEDIMENT CONTROL PLAN TO THE SATISFACTION OF THE CITY OF OTTAWA, APPROPRIATE TO THE SITE CONDITIONS, PRIOR TO UNDERTAKING ANY SITE ALTERATIONS (FILLING, GRADING, REMOVAL OF VEGETATION, ETC.) AND DURING ALL PHASES OF SITE PREPARATION AND CONSTRUCTION IN ACCORDANCE WITH THE CURRENT BEST MANAGEMENT PRACTICES FOR EROSION AND SEDIMENT CONTROL, SUCH AS BUT NOT LIMITED TO INSTALLING FILTER CLOTHS ACROSS MANHOLE/CATCHBASIN LIDS TO PREVENT SEDIMENTS FROM ENTERING STRUCTURES AND INSTALL AND MAINTAIN A LIGHT DUTY SILT FENCE BARRIER AS REQUIRED.
 - THE CONTRACTOR SHALL PLACE FILTER BAGS UNDER THE CATCHBASIN AND MANHOLE GRATES FOR THE DURATION OF CONSTRUCTION AND WILL REMAIN IN PLACE DURING ALL PHASES OF CONSTRUCTION.
 - SILT FENCING FOR ENTIRE PERIMETER OF SITE, SHALL BE UTILIZED TO CONTROL EROSION FROM THE SITE DURING CONSTRUCTION.
 - THE CONTRACTOR ACKNOWLEDGES THAT FAILURE TO IMPLEMENT EROSION AND SEDIMENT CONTROL MEASURES MAY BE SUBJECT TO PENALTIES IMPOSED BY ANY APPLICABLE REGULATORY AGENCY.
 - CONTRACTOR TO INSPECT ALL ESC DAILY AND IMMEDIATELY AFTER EVERY RAINFALL EVENT AND REPAIR ANY DAMAGED OR NON-FUNCTIONING MEASURES IMMEDIATELY.
 - THE PLAN IS TO BE CONSIDERED A "LIVING DOCUMENT" WHICH MAY BE MODIFIED IN THE EVENT THE EROSION AND SEDIMENT CONTROL MEASURES ARE INSUFFICIENT.
 - ROADWAYS ARE TO BE SWEEP AS REQUIRED OR AS DIRECTED BY THE ENGINEER AND/OR THE REPRESENTATIVE OF THE CITY OF OTTAWA.

ESC Measure	Symbol	OPSD No.	During Construction		After Construction Prior to Final Acceptance		After Final Acceptance
			Installation Responsibility	Inspection Responsibility	Inspection/Maintenance Responsibility	Removal Responsibility	Inspection/Maintenance Responsibility
Temporary Measures							
Light-Duty Silt Fence	○	219.110	Developer's Contractor	Developer's Contractor	Builder	Builder	N/A
Straw Bale Flow Check Dam	■	219.180	Developer's Contractor	Developer's Contractor	Builder	Builder	N/A
Filter Bags	○	Erosion and Sediment Control Notes and Details	Developer's Contractor	Developer's Contractor	Builder	Builder	N/A
Mud Mats	■	N/A	Developer's Contractor	Developer's Contractor	N/A	N/A	N/A
Permanent Measures							
Roof Leaders Directed to Grassed Areas	N/A	N/A	Builder	Builder	Developer/Site Owner	N/A	Developer/Site Owner

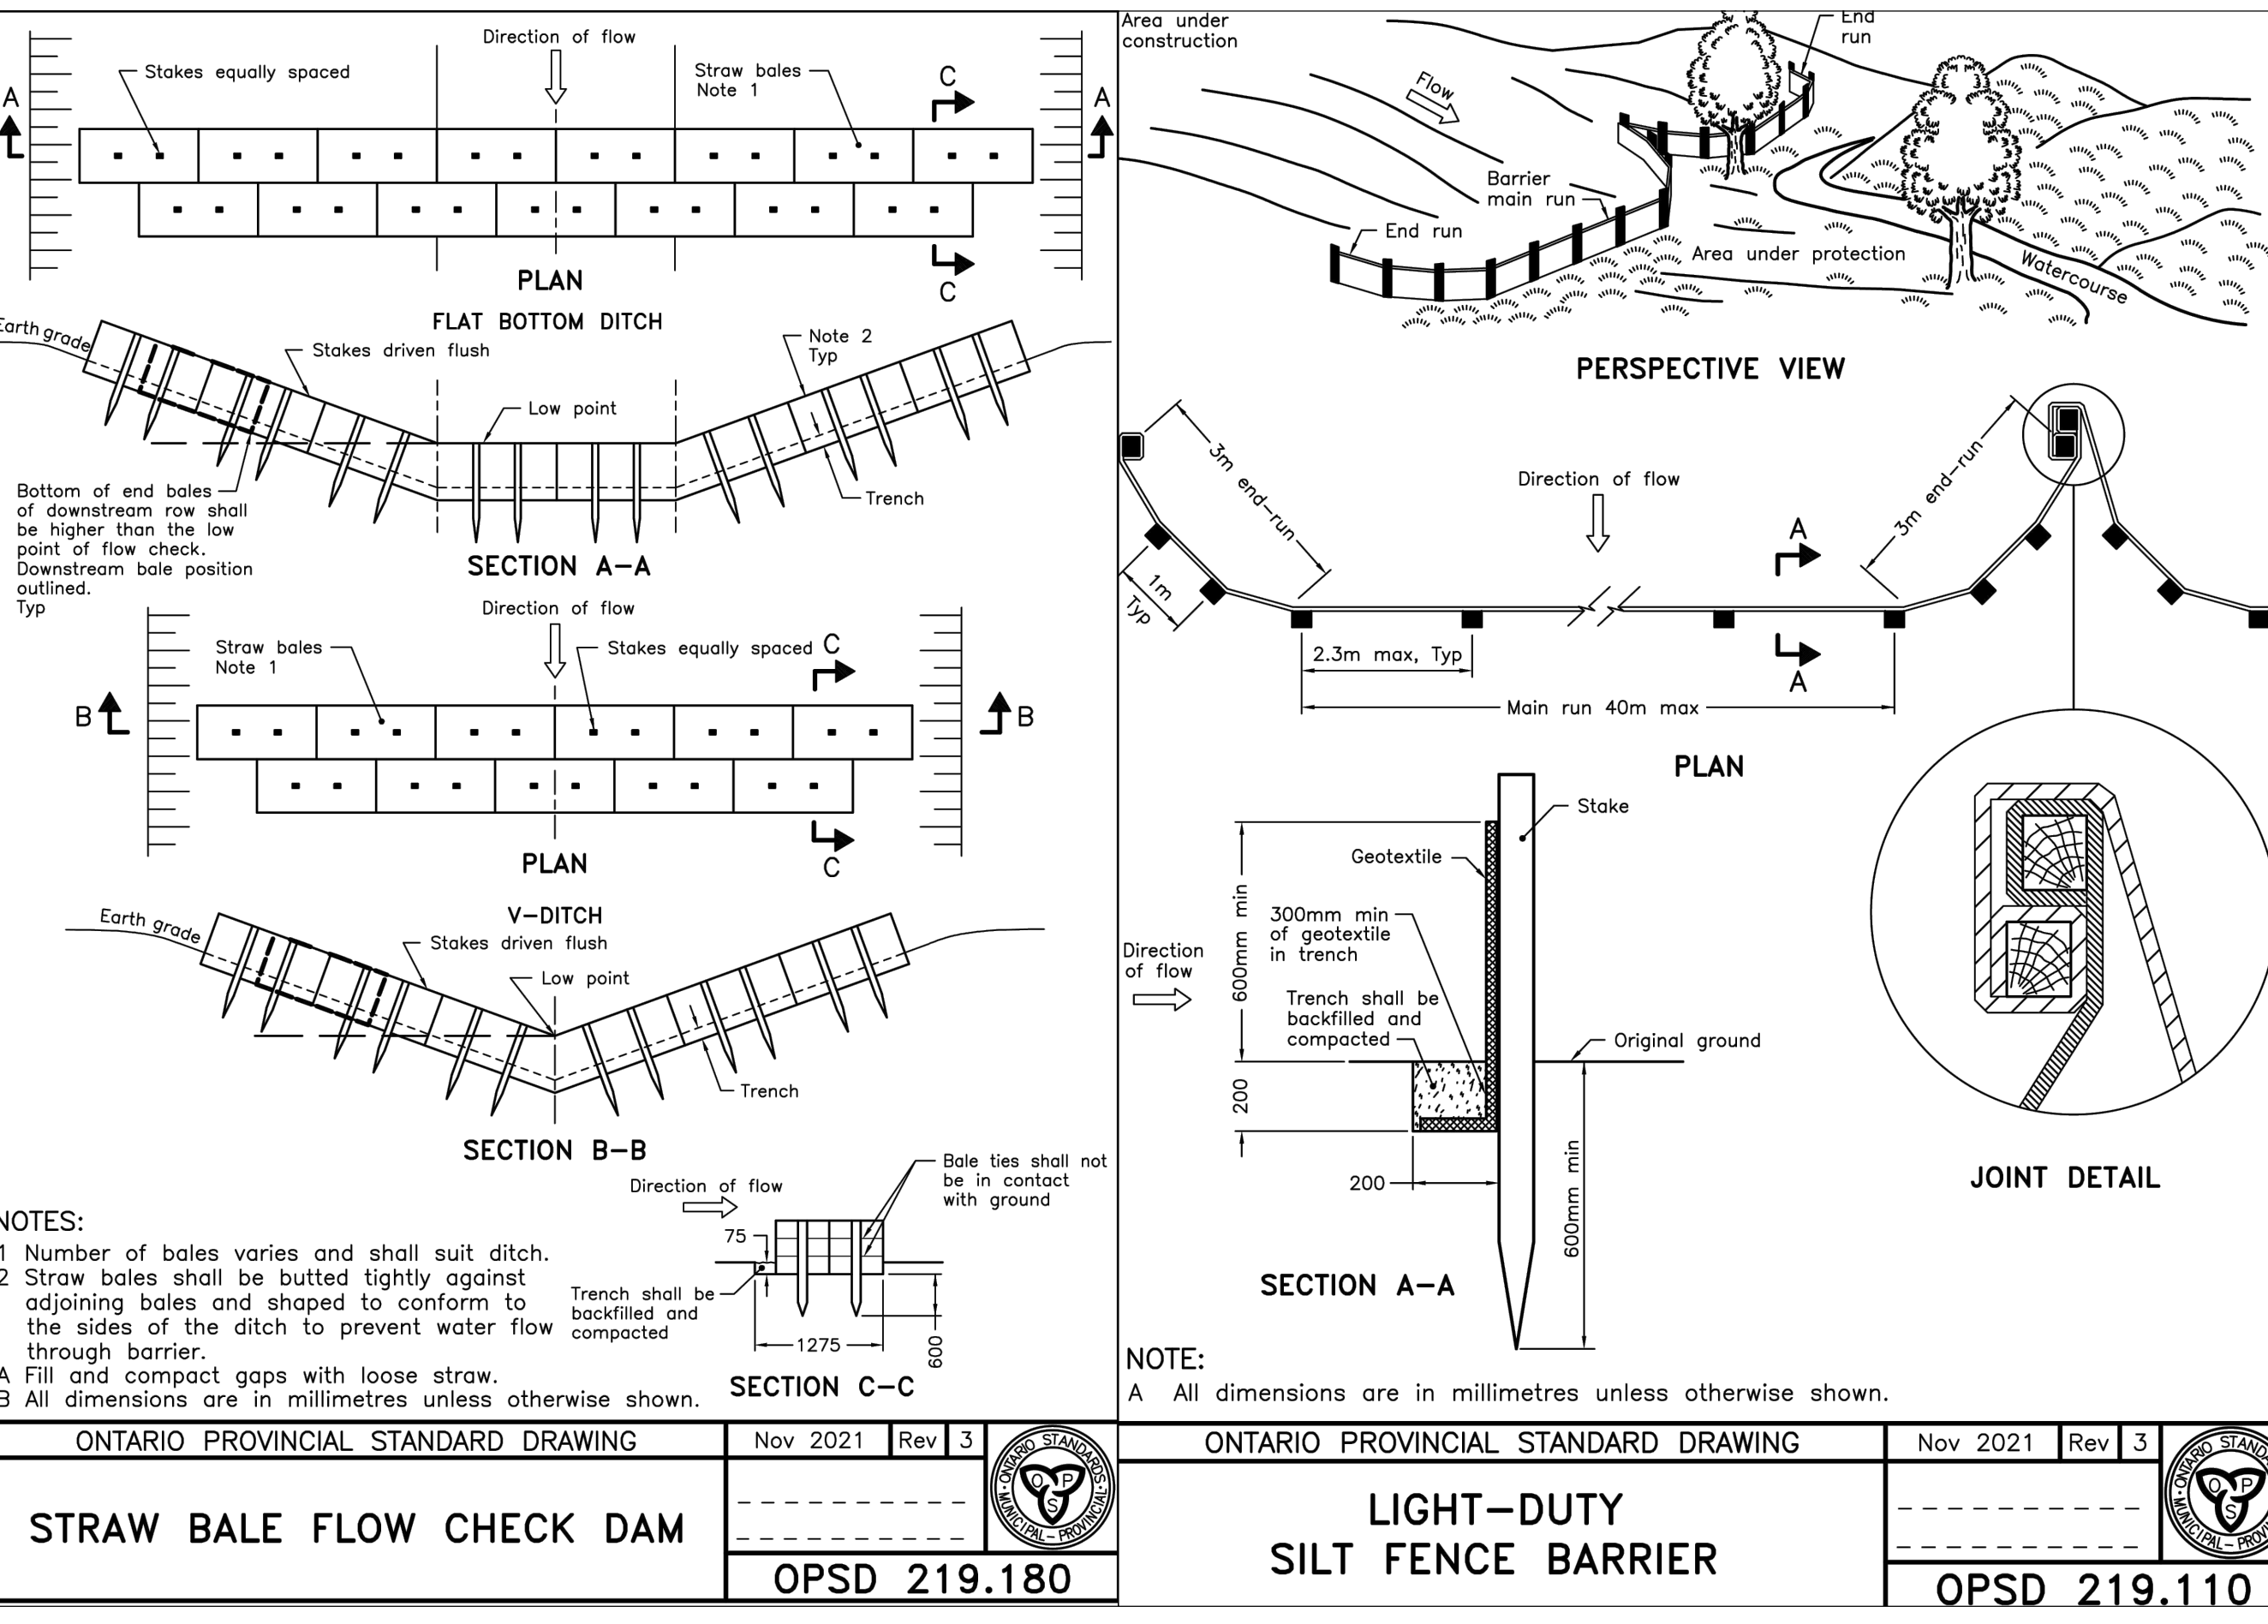

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2021 Rev 3

STRAW BALE FLOW CHECK DAM OPSD 219.180

LIGHT-DUTY SILT FENCE BARRIER OPSD 219.110

REVIEWED BY DEVELOPMENT REVIEW BRANCH

Signed _____

Date _____ 2026

Plan Number 19360

NOTE:
THE POSITION OF ALL POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

No.	REVISION	DATE	BY
3.	REVISED PER CITY AND MVCA COMMENTS	FEB 11/26	ARM
2.	REVISED PER CITY AND MVCA COMMENTS	FEB 2/26	ARM
1.	ISSUED FOR REVIEW	JUL 22/25	ARM

SCALE: 1:200

DESIGN: DKM
CHECKED: MJB
DRAWN: DKM
APPROVED: ARM

LOCATION (METRIC HOMES) SUBDIVISION - BLOCK 123
4829 ABBOTT ST EAST

NOVATECH
Engineers, Planners & Landscape Architects
Suite 200, 240 Michael Copland Drive
Ottawa, Ontario, Canada K2M 1P6
Telephone: (613) 254-9643
Facsimile: (613) 254-5867
Website: www.novatech-eng.com

EROSION & SEDIMENT CONTROL PLAN

PROJECT No: 110037
REV # 3
DRAWING No: 110037-ESC