


EXISTING ELEVATION	PROPOSED ELEVATION	TOP OF WM ELEVATION	SANITARY SEWER INVERTS	STORM SEWER INVERTS	CHAINAGE	DESCRIPTION
96.70	96.65	94.35	15.04m - 200mm PVC SDR 35 SAN @ 2.00%	18.90m - 825mm CONC. 65-D STM @ 0.11%	1+000	SANMH 101
96.32	97.00	94.60	21.55m - 200mm PVC SDR 35 SAN @ 2.00%	21.35m - 825mm CONC. 65-D STM @ 0.16%	1+025	SANMH 102
96.44	96.96	94.57	15.9m - 200mm PVC SDR 35 SAN @ 0.38%	13.31m - 825mm CONC. 65-D STM @ 0.15%	1+050	SANMH 103
96.45	97.11	94.71	72.88m - 200mm PVC SDR 35 SAN @ 0.34%	72.08m - 750mm CONC. 65-D STM @ 0.11%	1+100	HYD
96.45	97.05	94.65	71.25m - 200mm PVC SDR 35 SAN @ 0.34%	50.80m - 600mm CONC. 65-D STM @ 0.14%	1+113	HYD
96.54	97.14	94.74	21.5m - 525mm CONC. 65-D STM @ 0.23%	21.5m - 525mm CONC. 65-D STM @ 0.23%	1+175	HYD
96.63	97.24	94.84	72.10m - 200mm PVC SDR 35 SAN @ 0.33%	72.08m - 525mm CONC. 65-D STM @ 0.19%	1+225	HYD
96.64	97.34	94.94	58.01m - 200mm PVC SDR 35 SAN @ 0.33%	58.65m - 375mm PVC SDR 35 STM @ 0.26%	1+288.01	HYD
96.67	97.40	95.00	8.63m - 200mm PVC SDR 35 SAN @ 0.35%	8.87m - 375mm PVC SDR 35 STM @ 0.34%	1+300	HYD
96.68	97.53	95.13	12.60m - 200mm PVC SDR 35 SAN @ 0.40%	12.00m - 375mm PVC SDR 35 STM @ 0.25%	1+326.82	HYD
96.69	97.55	95.15	8.83m - 200mm PVC SDR 35 SAN @ 0.35%	8.87m - 375mm PVC SDR 35 STM @ 0.34%	1+340.05	HYD
96.67	97.51	95.11	58.01m - 200mm PVC SDR 35 SAN @ 0.33%	58.65m - 375mm PVC SDR 35 STM @ 0.26%	1+369.07	HYD
96.64	97.50	95.10	12.60m - 200mm PVC SDR 35 SAN @ 0.40%	12.00m - 375mm PVC SDR 35 STM @ 0.25%	1+382.82	HYD
96.63	97.60	95.20	8.83m - 200mm PVC SDR 35 SAN @ 0.35%	8.87m - 375mm PVC SDR 35 STM @ 0.34%	1+405.04	HYD
96.60	97.66	95.26	12.60m - 200mm PVC SDR 35 SAN @ 0.40%	12.00m - 375mm PVC SDR 35 STM @ 0.25%	1+428.04	HYD
96.60	97.64	95.24	8.83m - 200mm PVC SDR 35 SAN @ 0.35%	8.87m - 375mm PVC SDR 35 STM @ 0.34%	1+451.04	HYD


NOTE:  
THE POSITION OF ALL POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

No.	REVISION	DATE	BY
8.	RE-ISSUED FOR TENDER	JUN 18/26	DOB
7.	RE-ISSUED FOR TENDER	APR 15/26	DOB
6.	REVISED PER CITY COMMENTS	MAR 18/26	DOB
5.	REVISED SITE PLAN SUBMISSION	NOV 14/25	DOB
4.	RE-ISSUED FOR TENDER	JAN 18/24	DOB
3.	ISSUED FOR TENDER	MAY 20/22	DOB
2.	REVISED PER CITY COMMENTS	FEB 17/22	DOB
1.	ISSUED FOR CITY OF OTTAWA REVIEW	NOV 5/21	DOB
9.	ISSUED FOR SITE PLAN APPROVAL	JUN 25/26	DOB

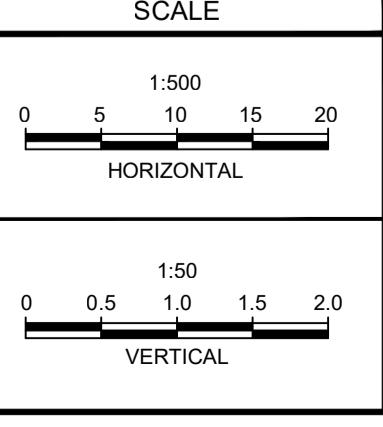

DESIGN	DATE	BY
CHECKED		BM
DRAWN		DOB
CHECKED		ATE
APPROVED		BM
		DOB

FOR REVIEW ONLY

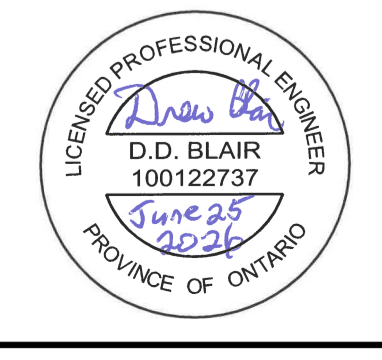

**NOVATECH**  
Engineers, Planners & Landscape Architects  
Suite 200, 240 Michael Cowpland Drive  
Ottawa, Ontario, Canada K2M 1P6  
Telephone: (613) 254-9643  
Facsimile: (613) 254-5867  
Website: www.novatech-eng.com

CITY OF OTTAWA  
5331 FERNBANK ROAD  
IRON VALLEY 2

DRAWING NAME  
**PLAN AND PROFILE**

PROJECT No.  
121011-00

REV #  
REV # 9

DRAWING No.  
121011-PR

#18539