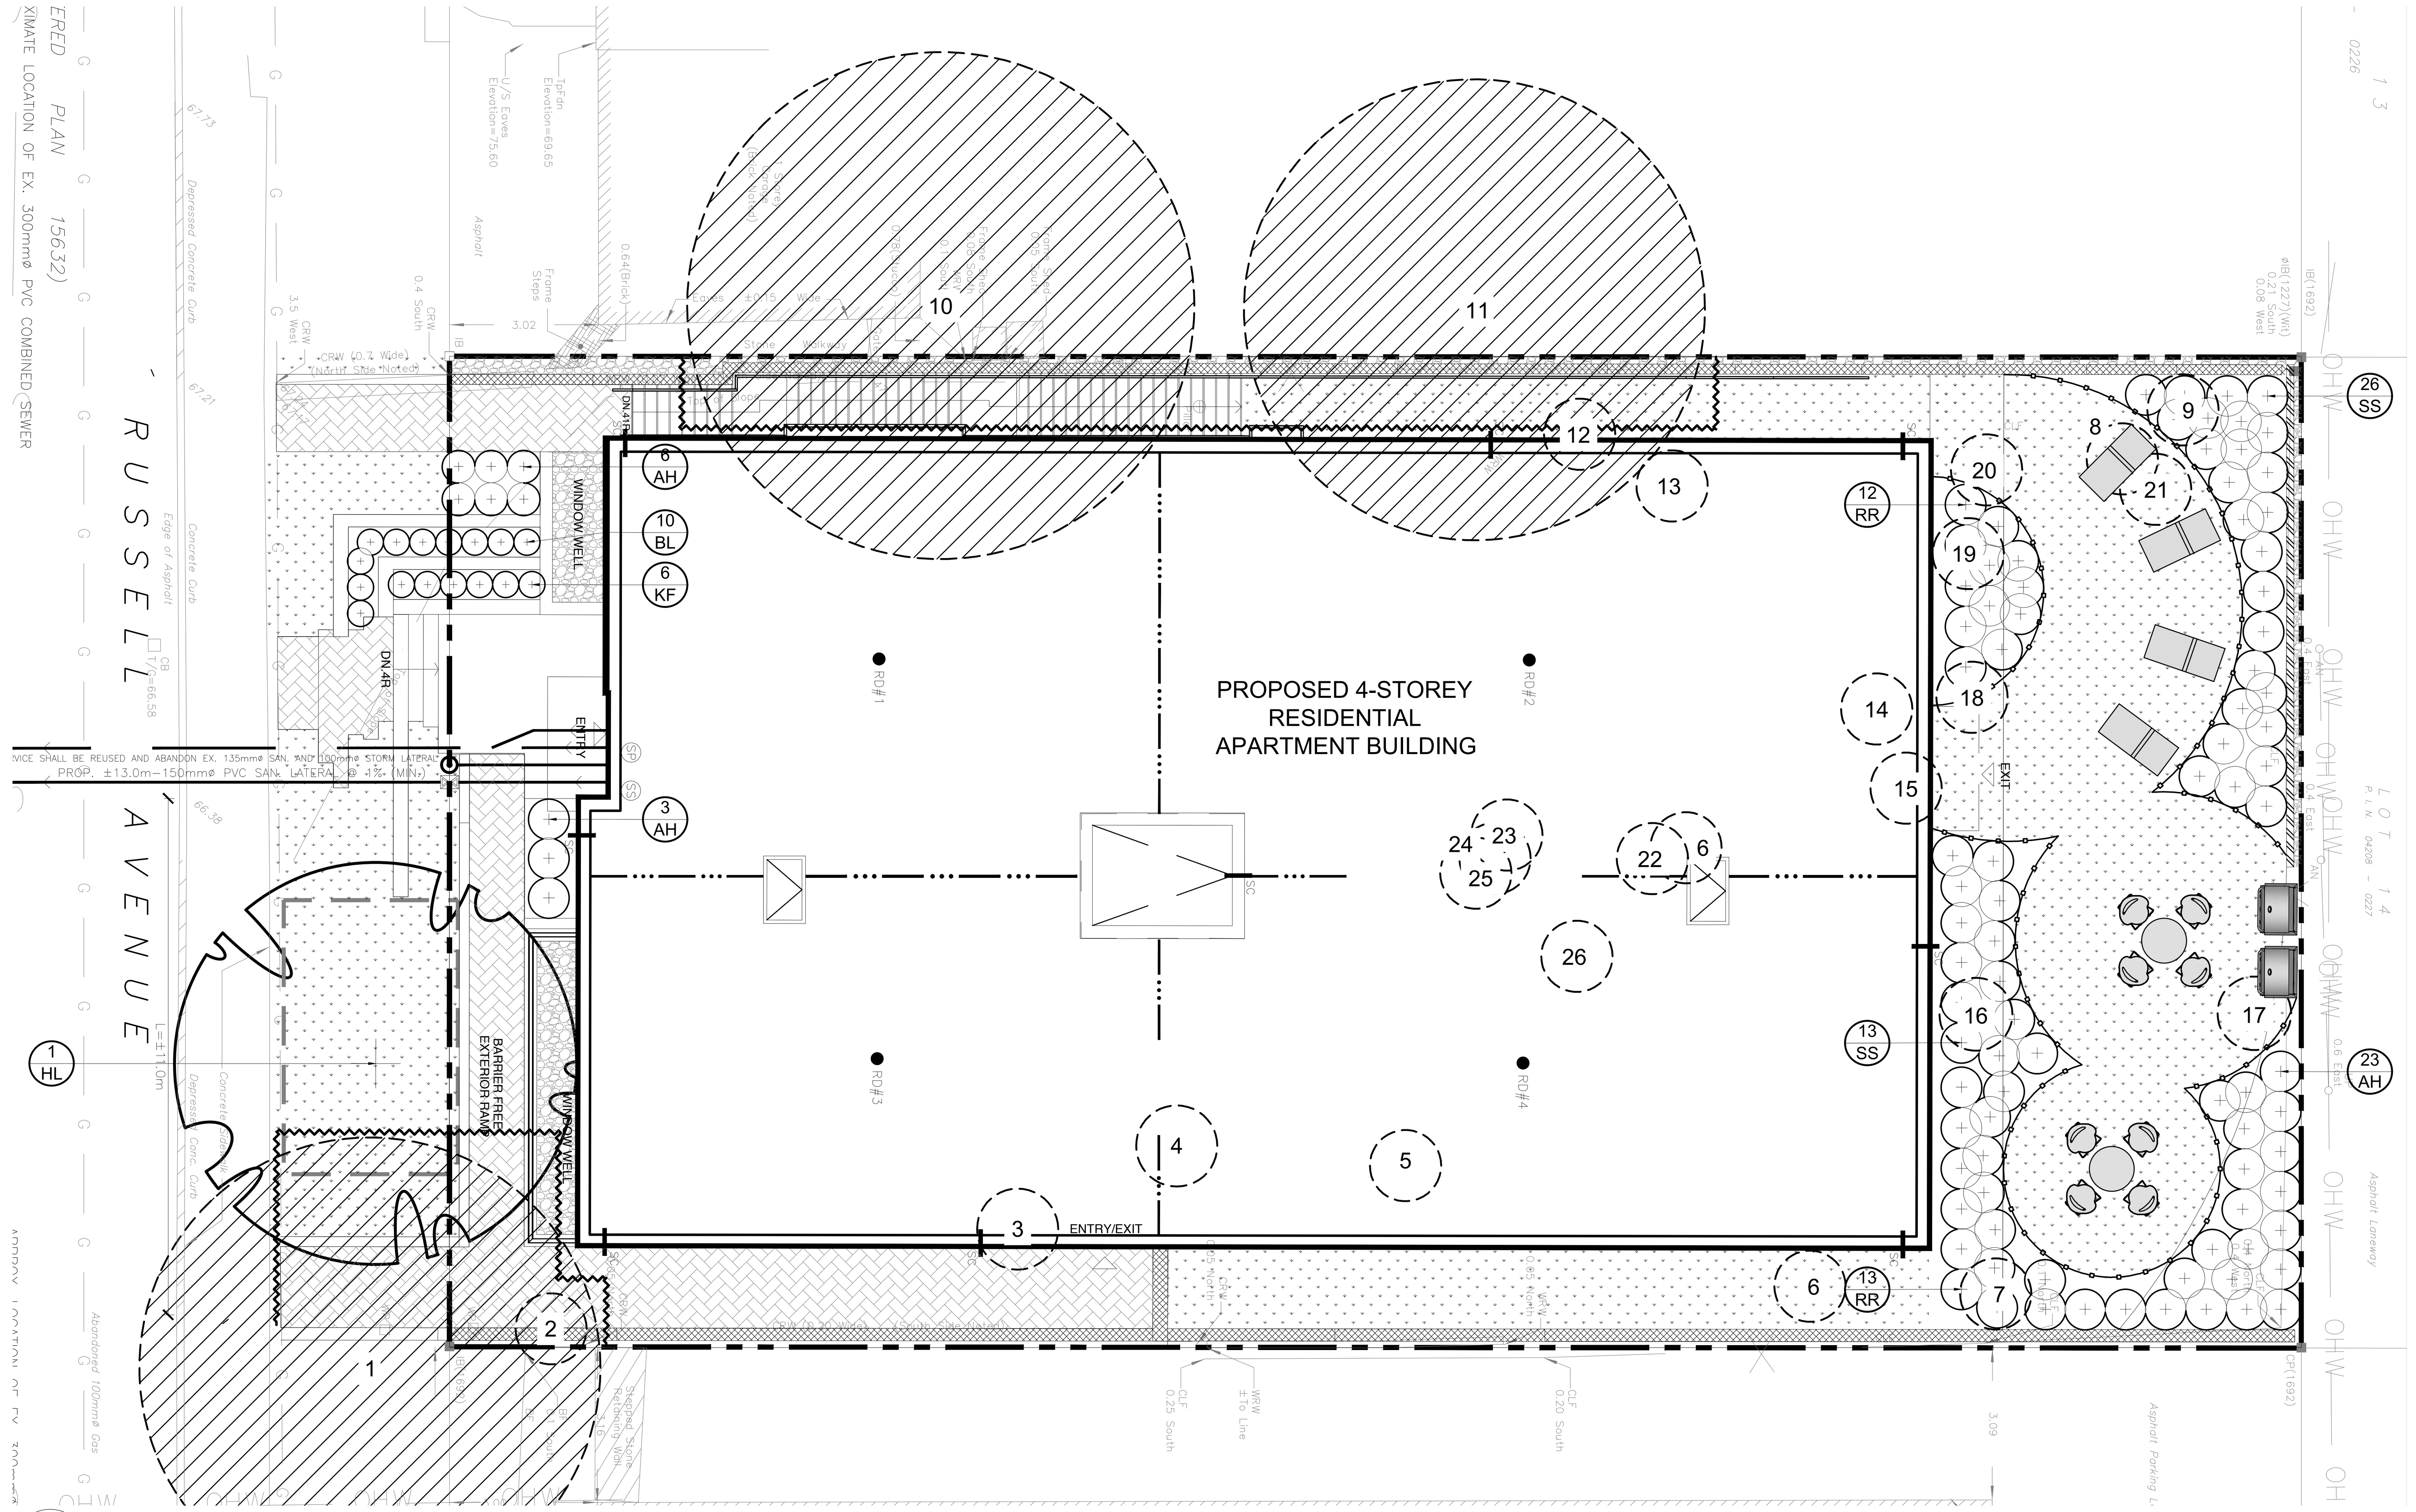

1 / L.1 TREE CONSERVATION REPORT & LANDSCAPE PLAN
SCALE 1:100

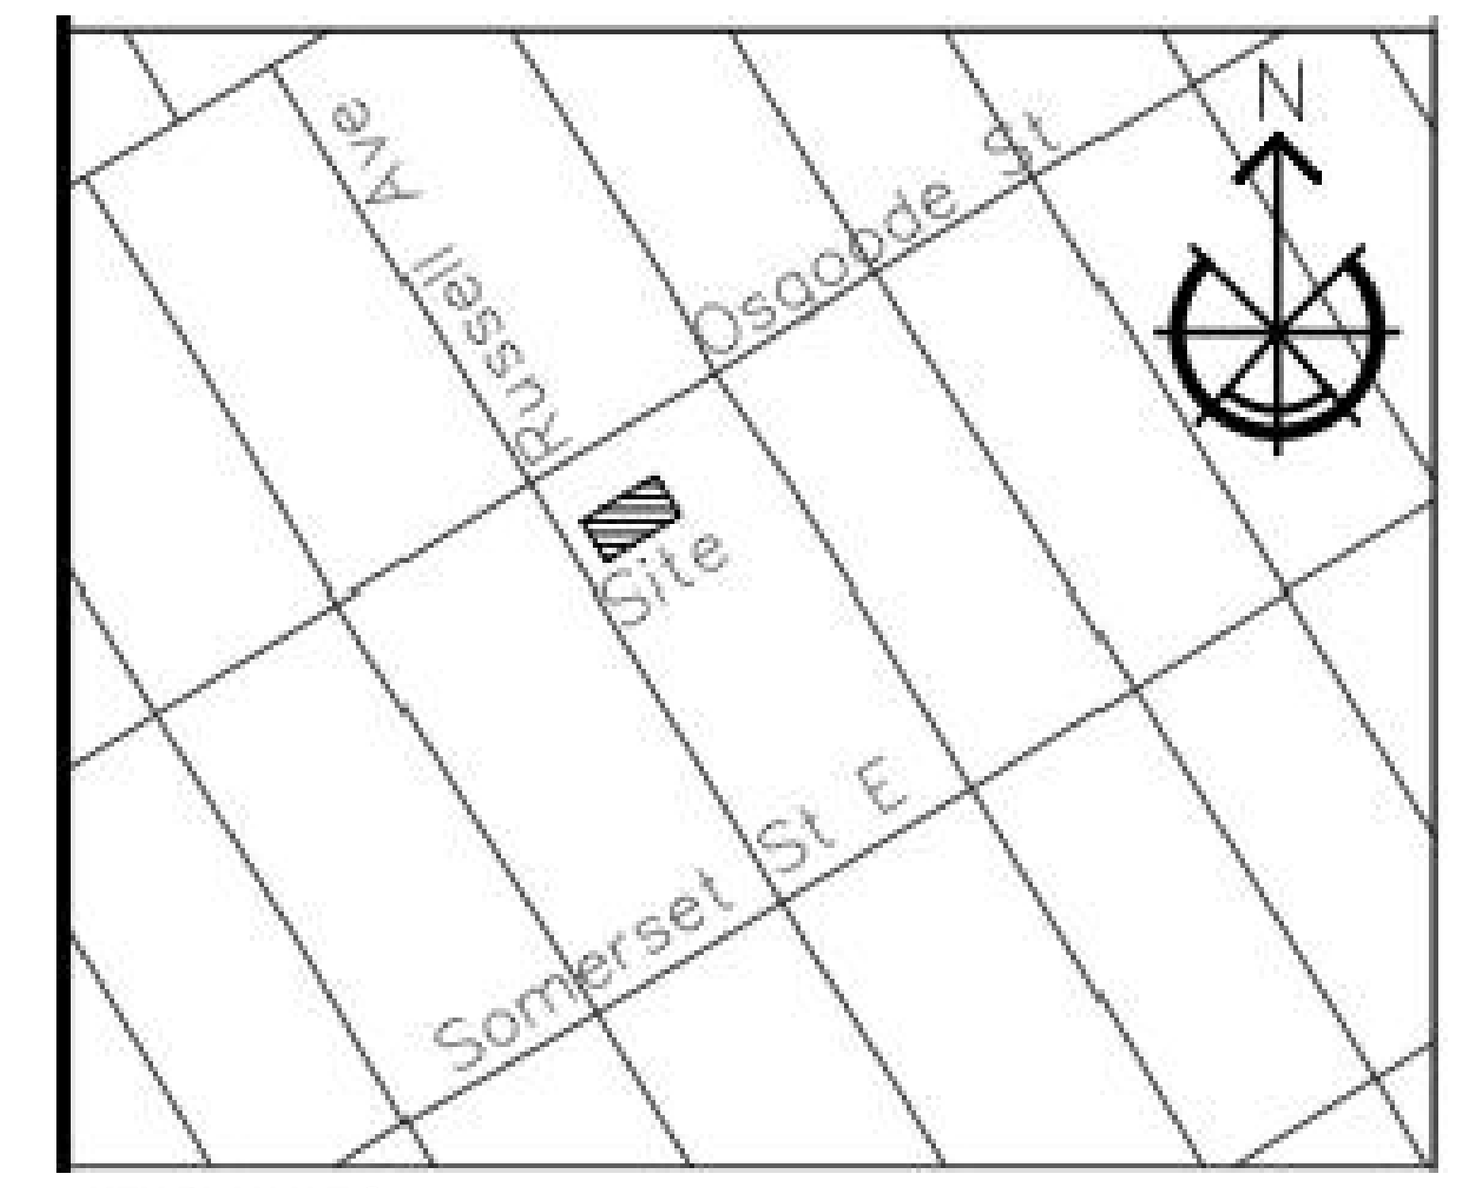

KEY PLAN N.T.S.

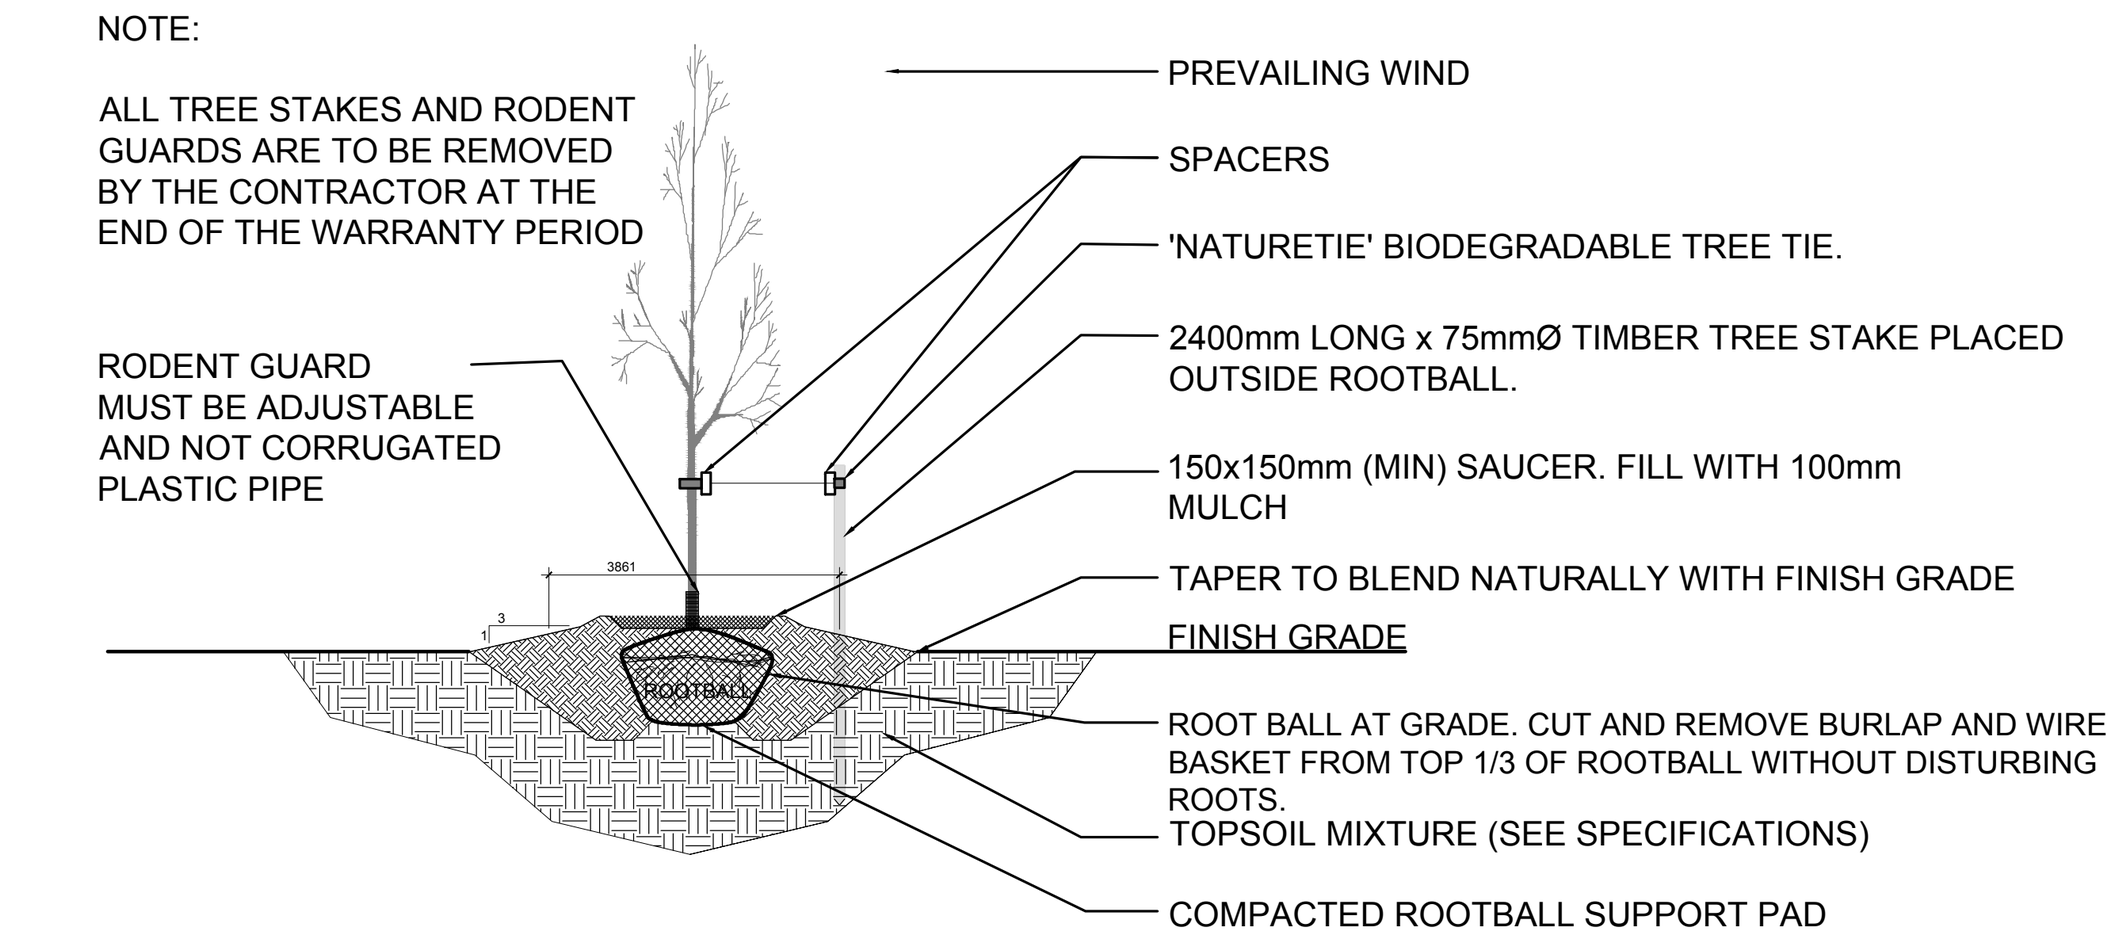

2 / L.1 DECIDUOUS TREE PLANTING
SCALE: NTS

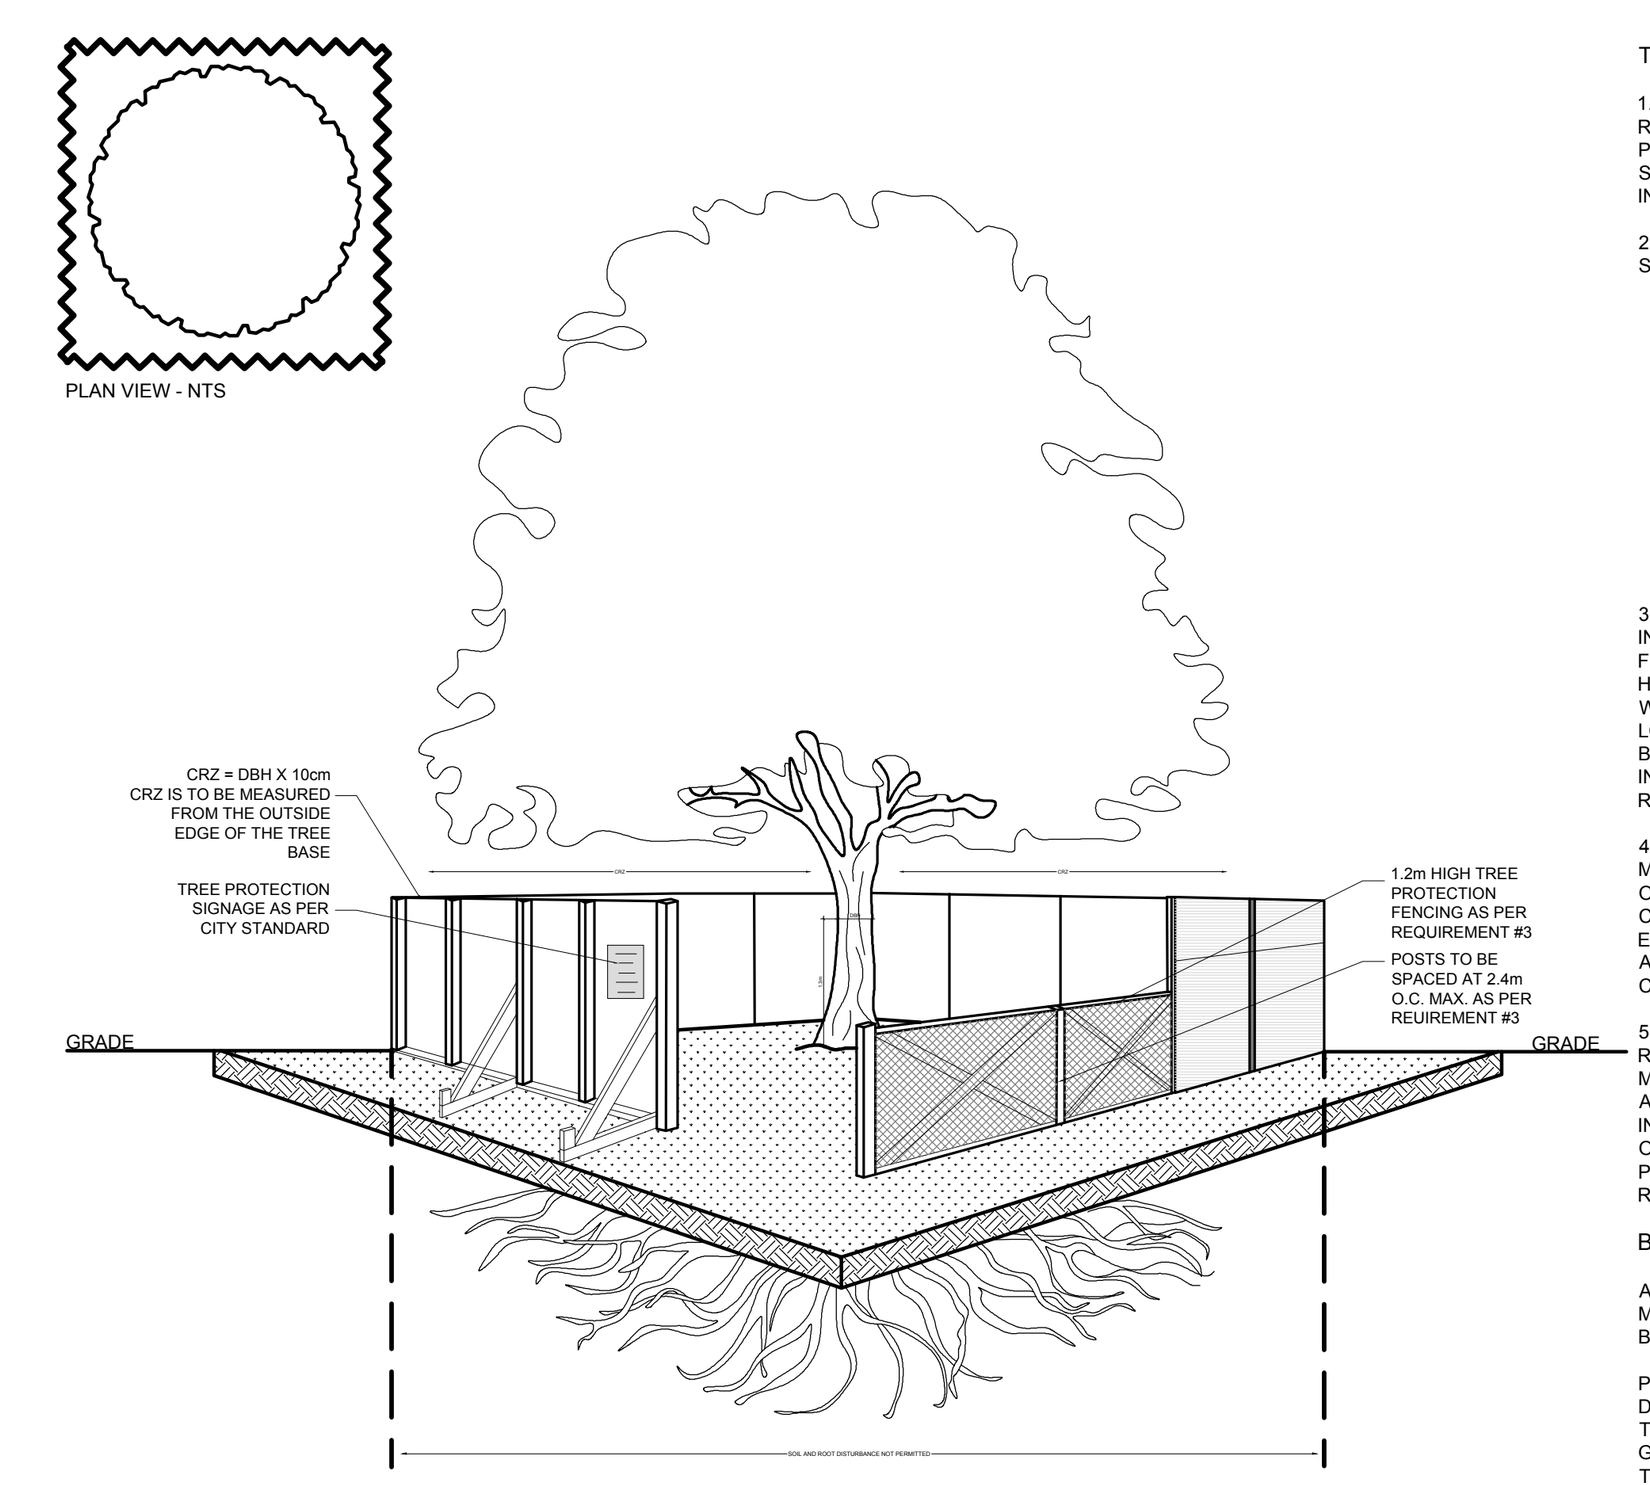

TREE PROTECTION REQUIREMENTS:

1. PRIOR TO ANY WORK ACTIVITY WITHIN THE CRITICAL ROOT ZONE (CRZ = 10X DIAMETER) OF A TREE, TREE PROTECTION FENCING MUST BE INSTALLED SURROUNDING THE CRITICAL ROOT ZONE AND REMAIN IN PLACE UNTIL THE WORK IS COMPLETE.

2. UNLESS PLANS ARE APPROVED BY CITY FORESTRY STAFF, FOR WORK WITHIN THE CRZ:
- DO NOT PLACE ANY MATERIAL OR EQUIPMENT INCLUDING OUTHOUSES;
- DO NOT ATTACH ANY SIGNS, NOTICES OR POSTERS TO ANY TREE;
- DO NOT RAISE OR LOWER THE EXISTING GRADE;
- TUNNEL OR BORE WHEN DIGGING;
- DO NOT DAMAGE THE ROOT SYSTEM, TRUNK, OR BUNCHES OR ANY TREE;
- ENSURE THAT EXHAUST FUMES FROM ALL EQUIPMENT ARE NOT DIRECTED TOWARD ANY TREE CANOPY.
- DO NOT EXTEND HARD SURFACE OR SIGNIFICANTLY CHANGE LANDSCAPING

3.TREE PROTECTION FENCING MUST BE AT LEAST 1.2m IN HEIGHT, AND BE CONSTRUCTED OF RIGID OR FRAMED MATERIALS (E.G. MODULOC • STEEL,PLYWOOD HOARDING, OR SNOW FENCE ON A 2"X4" WOOD FRAME) WITH POSTS 2.4m APART, SUCH THAT THE FENCE LOCATION CANNOT BE ALTERED. ALL SUPPORTS AND BRACING MUST BE PLACED OUTSIDE OF THE CRZ, AND INSTALLATION MUST MINIMISE DAMAGE TO EXISTING ROOTS. (SEE DETAIL)

4. THE LOCATION OF THE TREE PROTECTION FENCING MUST BE DETERMINED BY AN ARBORIST AND DETAILED ON ANY ASSOCIATED PLANS FOR THE SITE.(E.G. TREE CONSERVATION REPORT, TREE DISCLOSURE REPORT, ETC). THE PLAN AND CONSTRUCTED FENCING MUST BE APPROVED BY CITY FORESTRY STAFF PRIOR TO THE COMMENCEMENT OF WORK.

5. IF THE FENCED TREE PROTECTION AREA MUST BE REDUCED TO FACILITATE CONSTRUCTION, MITIGATION MEASURES MUST BE PRESCRIBED BY AN ARBORIST AND APPROVED BY CITY FORESTRY STAFF. THESE MAY INCLUDE THE PLACEMENT OF PLYWOOD, WOOD CHIPS OR STEEL PLATING OVER THE ROOTS FOR PROTECTION OR THE PROPER PRUNING AND CARE OF ROOTS WHERE ENCOUNTERED.

BY-LAWS:

ALL CITY-OWNED TREES ARE PROTECTED UNDER THE MUNICIPAL TREES AND NATURAL AREAS PROTECTION BY-LAW (2006-279). WITHIN THE URBAN AREA,

PRIVATELY-OWNED TREES GREATER THAN 50cm IN DIAMETER ON LOTS 1 HECTARE IN SIZE OR LESS, AND TREES GREATER THAN 10cm IN DIAMETER ON LOTS GREATER THAN 1 HECTARE, ARE PROTECTED UNDER THE URBAN TREE CONSERVATION BY-LAW (2020-340).

3 / L.1 TREE PROTECTION FENCE
SCALE: NTS

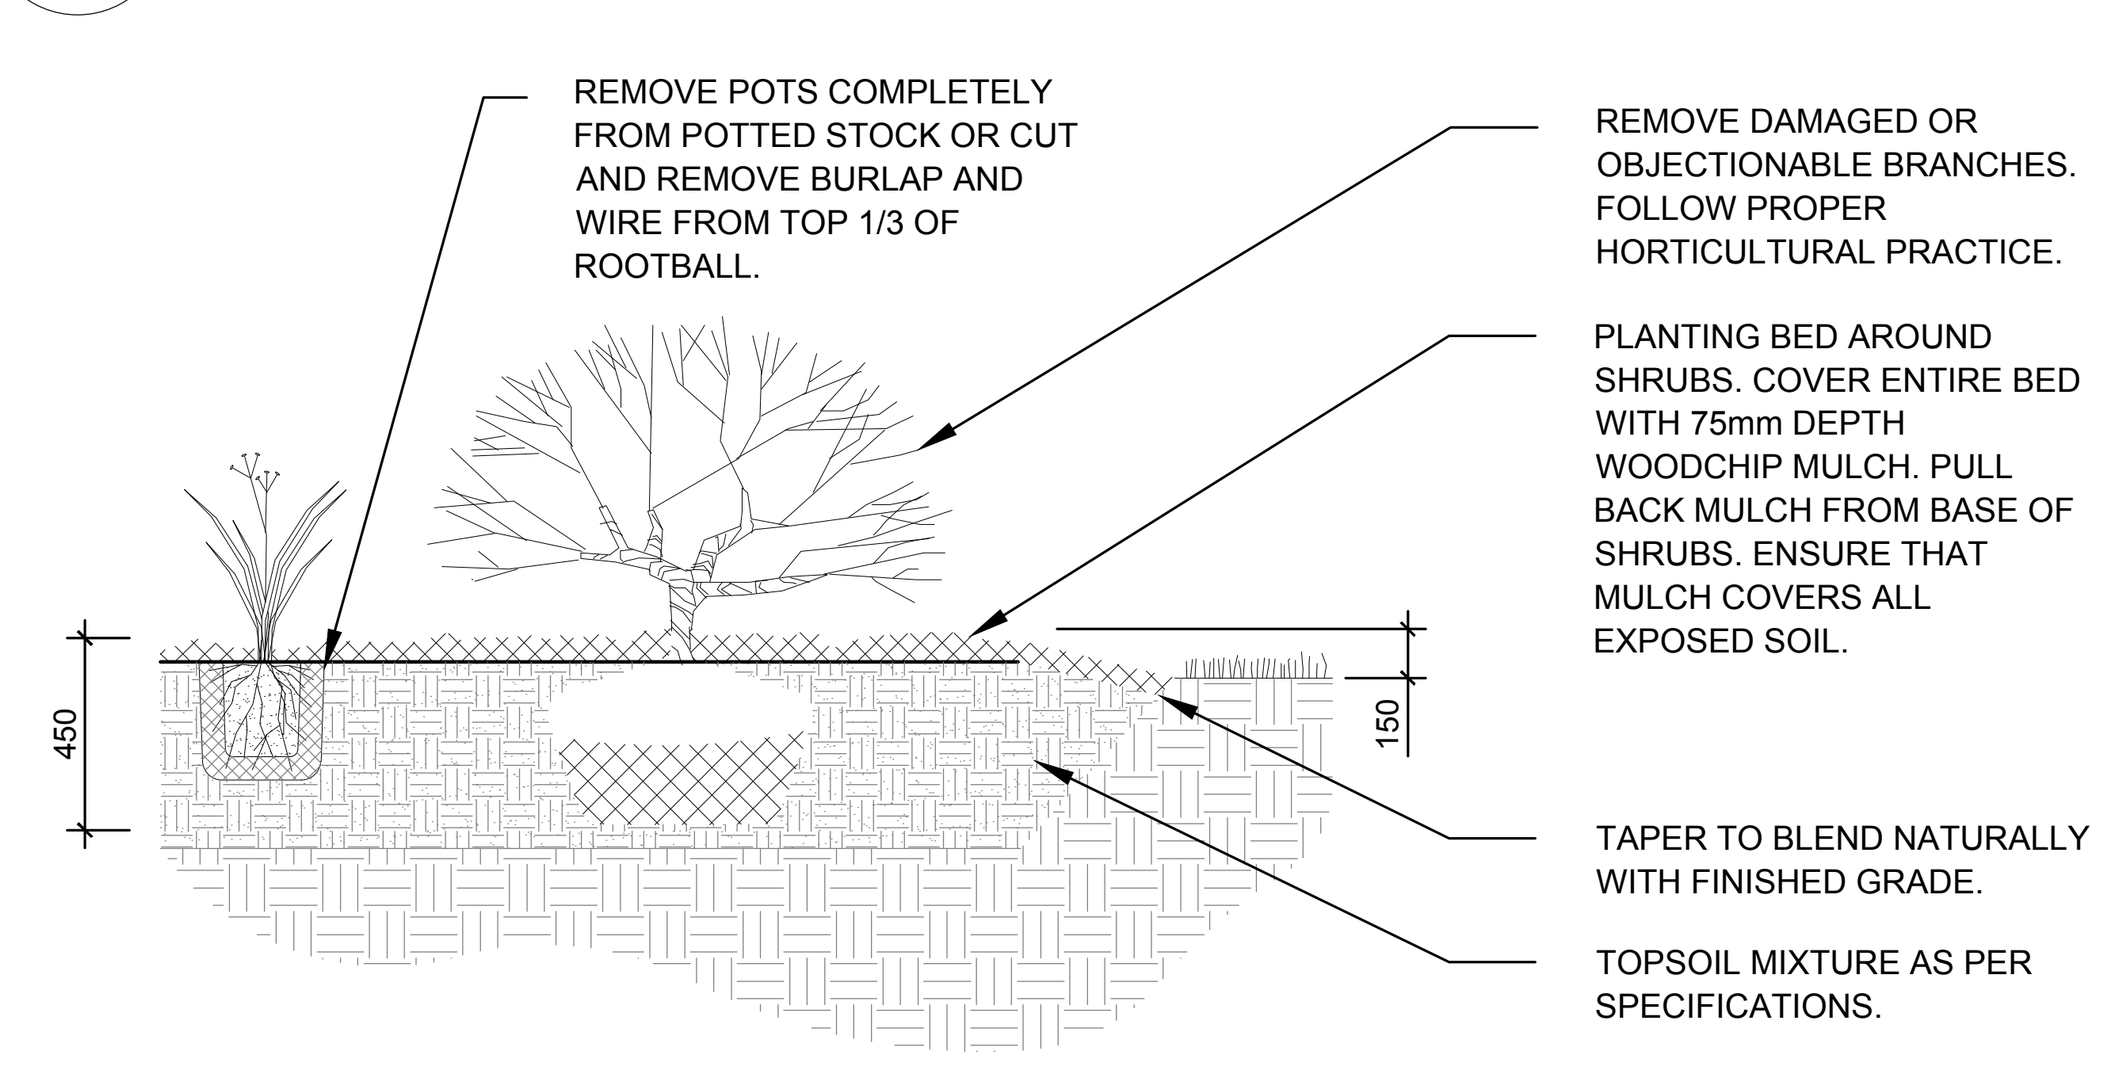

4 / L.1 SHRUB / ORNAMENTAL GRASS PLANTING
SCALE: NTS

PROPOSED PLANT LIST (QTY. / KEY)

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	CONDITION	REMARKS
TREES						
*HL	1	Gleditsia triacanthos 'Draves'	Street Keeper Honey Locust	50mm ø	B&B	
SHRUBS						
AH	32	Hydrangea arborescens 'Annabelle'	Annabelle Hydrangea	1 gallon pot	Potted	Space 1000mm o.c.
RR	25	Rosa rugosa	Rugosa Rose	800mm ht.	Potted	Space 1000mm o.c.
SS	29	Sorbaria sorbifolia 'Sem'	Sem False Spirea	600mm ht.	Potted	Space 1000mm o.c.
ORNAMENTAL GRASSES						
BL	10	Leymus arenarius 'Blue Dune'	Blue Lyme Grass	250mm pot	Potted	Space 800mm o.c.
KF	6	Calamagrostis 'Karl Foerster'	Feather Reed Grass	250mm pot	Potted	Space 800mm o.c.

*Indicates that species is native to Ontario

EXISTING TREE LIST

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	CONDITION	REMARKS	OWNERSHIP	COMMENTS
1	1	*Acer platanoides*	Norway Maple	490mm DBH	GOOD	To remain	City of Ottawa	
2	1	*Acer negundo*	Manitoba Maple	520mm DBH	GOOD	To be removed	71 Russell Avenue	
3	1	*Picea pungens*	Colorado Spruce	390mm DBH	POOR	To be removed	71 Russell Avenue	
4	1	*Picea pungens*	Colorado Spruce	310mm DBH	POOR	To be removed	71 Russell Avenue	
5	1	*Acer negundo*	Manitoba Maple	700mm DBH	POOR	To be removed	71 Russell Avenue	
6	1	*Acer platanoides*	Norway Maple	300mm DBH	POOR	To be removed	71 Russell Avenue	
7	1	*Acer negundo*	Norway Maple	400mm DBH	GOOD	To be removed	71 Russell Avenue	
8	1	*Acer negundo*	Manitoba Maple	500mm DBH	POOR	To be removed	71 Russell Avenue	
9	1	*Quercus macrocarpa*	Bur Oak	200mm DBH	GOOD	To be removed	71 Russell Avenue	
10	1	*Ulmus americana*	American Elm	600mm DBH	POOR	To remain	69 Russell Avenue	
11	1	*Acer negundo*	Manitoba Maple	500,650mm DBH	POOR	To remain	69 Russell Avenue	
12	1	*Acer negundo*	Manitoba Maple	500mm DBH	DEAD	To be removed	71 Russell Avenue	
13	1	*Acer saccharum*	Sugar Maple	300mm DBH	GOOD	To be removed	71 Russell Avenue	
14	1	*Acer saccharum*	Sugar Maple	100mm DBH	GOOD	To be removed	71 Russell Avenue	
15	1	*Acer platanoides*	Norway Maple	600mm DBH	GOOD	To be removed	71 Russell Avenue	
16	1	*Acer negundo*	Manitoba Maple	600mm DBH	GOOD	To be removed	71 Russell Avenue	
17	1	*Acer saccharum*	Sugar Maple	210mm DBH	GOOD	To be removed	71 Russell Avenue	
18	1	*Acer platanoides*	Norway Maple	700mm DBH	GOOD	To be removed	71 Russell Avenue	
19	1	*Acer saccharum*	Sugar Maple	500mm DBH	GOOD	To be removed	71 Russell Avenue	
20	1	*Acer saccharum*	Sugar Maple	100mm DBH	GOOD	To be removed	71 Russell Avenue	
21	1	*Fraxinus spp.*	Ash	200mm DBH	DEAD	To be removed	71 Russell Avenue	
22	1	*Acer platanoides*	Norway Maple	200mm DBH	GOOD	To be removed	71 Russell Avenue	
23	1	*Acer platanoides*	Norway Maple	100mm DBH	GOOD	To be removed	71 Russell Avenue	
24	1	*Acer platanoides*	Norway Maple	210mm DBH	GOOD	To be removed	71 Russell Avenue	
25	1	*Acer platanoides*	Norway Maple	100mm DBH	GOOD	To be removed	71 Russell Avenue	
26	1	*Acer platanoides*	Norway Maple	400mm DBH	GOOD	To be removed	71 Russell Avenue	

GENERAL NOTES:

1. IT IS THE RESPONSIBILITY OF THE APPROPRIATE CONTRACTOR OR OFFICIAL TO REPORT ANY ERRORS, OMISSIONS OR DISCREPANCIES ON THIS PLAN WITH ACTUAL SITE CONDITIONS TO THE LANDSCAPE ARCHITECT BEFORE PROCEEDING WITH CONSTRUCTION.
2. THE CONTRACTOR IS TO NOTIFY ALL UTILITY COMPANIES AND AUTHORITIES PRIOR TO ANY EXCAVATION AND ASCERTAIN LOCATIONS OF UNDERGROUND SERVICES.
3. THE CONTRACTOR IS TO REINSTATE ALL AREAS AND ITEMS DAMAGED AS A RESULT OF CONSTRUCTION ACTIVITY.
4. THE CONTRACTOR IS TO COMPLY WITH ALL PERTINENT CODES AND BY-LAWS.
5. THE CONTRACTOR IS TO MAINTAIN A POSITIVE SURFACE RUN-OFF THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD.
6. THE LANDSCAPE ARCHITECT IS NOT RESPONSIBLE FOR SUBSURFACE CONDITIONS.
7. THE CONTRACTOR IS TO IDENTIFY ALL EXISTING TREES TO REMAIN ON SITE WITH THE LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION.
8. THE CONTRACTOR IS TO STAKE THE PROPOSED LOCATION OF ALL PLANT MATERIAL IN CONJUNCTION WITH THE LANDSCAPE ARCHITECT PRIOR TO EXCAVATION.
9. MINIMUM DISTANCES FOR SELECTED DECIDUOUS TREES ARE AS FOLLOWS:
   - 9.1. BUILDING FOUNDATIONS - 7.5M
   - 9.2. SIDEWALKS - 1.5M
   - 9.3. PUBLIC STREETS - 2.5M
   - 9.4. UNDERGROUND INFRASTRUCTURE - 2.0M
10. ALL TREES WITHIN 1M OF UNDERGROUND UTILITY TRENCHES ARE TO BE EXCAVATED BY HAND.
11. REMOVE ALL PROTECTIVE WRAPPING FROM TREE TRUNKS AFTER INSTALLATION.
12. STAKING OF TREES SHALL ONLY BE PERFORMED IF NECESSARY.
13. ENSURE THAT MULCH IS PULLED BACK A MINIMUM DISTANCE OF 75MM FROM BASE OF TREE TRUNK.

40 YEAR CANOPY CALCULATION:

757 m^2 site area

(1) Large medium Tree Proposed (79m^2)

= 79m^2 canopy cover = 10.4% canopy cover

***Medium deciduous tree calculated at 10m spread**

LEGAL DESCRIPTION

LOT 14
EAST SIDE OF RUSSELL AVENUE
REGISTERED PLAN 58319
CITY OF OTTAWA

CLIENT

JERSEY DEVELOPMENTS INC.

CONSULTANTS

ARCHITECTS:

LAWRENCE ARCHITECTS INC.
18 Deakin Street #205
Ottawa, ON K2E 8B7
Tel : (613) 739-7770

SURVEYORS:

FARLEY, SMITH & DENIS SURVEYING LTD.
ONTARIO LAND SURVEYORS
CANADA LAND SURVEYORS
Unit 275, 30 COLONNADE ROAD, OTTAWA, ONTARIO K2E 7J6
TEL. (613) 727–8226 E–mail: info@fsdsurveys.ca

CIVIL ENGINEERS:

TL MAK ENGINEERING CONSULTANTS INC.
1455 Youville Drive Unit 218
Orleans, ON K1C 6Z7
Tel : (613) 837-5516

LEGEND

- PROPOSED SODDED GRASS AREA
- PROPOSED RIVERSTONE MULCH (75-100mm DIA. / 3-4 INCH DIA.)
- PROPOSED PRECAST CONCRETE PAVERS
- REQUIRED SOIL VOLUME AT A 1.5m DEPTH PROPOSED DECIDUOUS TREE
- PROPOSED SHRUBS / ORNAMENTAL GRASSES
- EXISTING TREE TO REMAIN
- EXISTING TREE TO BE REMOVED
- TREE PROTECTION FENCE
- PROPOSED LANDSCAPE EDGER

No.	Issue	Date MM/DD/YY	DR	CK
5				
4				
3				
2				
1	ISSUED FOR SITE PLAN CONTROL	01/30/2026	ML	JL

JAMES B. LENNOX & ASSOCIATES INC.
LANDSCAPE ARCHITECTS
3332 CARLING AVE. OTTAWA, ONTARIO K2H 5A8
Tel. (613) 722-5168 **Fax. 1(866) 343-3942**

PROJECT

PROPOSED 4 STOREY RESIDENTIAL APARTMENT
71 RUSSELL AVENUE, OTTAWA ON

DRAWING

TREE CONSERVATION REPORT & LANDSCAPE PLAN

STAMP

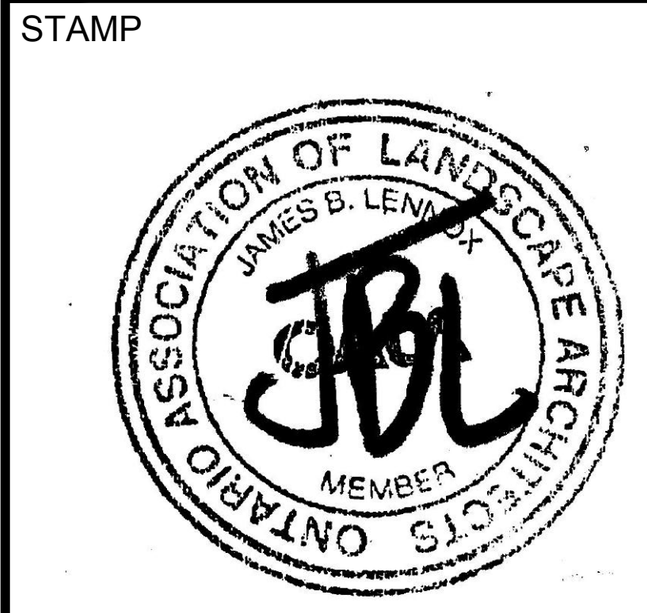

SCALE: AS SHOWN

START DATE: DECEMBER 2025

PROJECT NO.: 26MIS2615

PROJECT NORTH

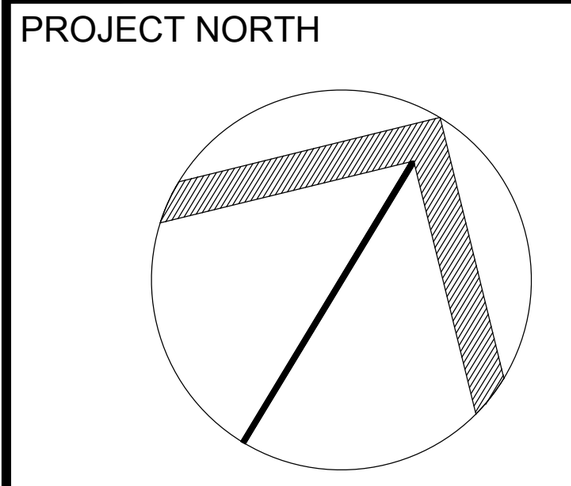

DRAWING NO.

L.1

PLOT SIZE ARCH-D