

Claridge Homes

Adequacy of Public Services Report – Spring Valley Trails Subdivision Phase 5/6

City of Ottawa, Ontario

December 16, 2025

Adequacy of Public Services Report – Spring Valley Trails Subdivision Phase 5/6
City of Ottawa, Ontario
December 16, 2025

Adequacy of Public Services Report – Spring Valley Trails Subdivision Phase 5/6

City of Ottawa, Ontario

December 16, 2025

Prepared By:

Arcadis Professional Services (Canada) Inc.
333 Preston Street, Suite 500
Ottawa, Ontario K1S 5N4
Canada
Phone: 613 225 1311

Prepared For:

Claridge Homes
505 Preston Street, 2nd Floor
Ottawa, ON K1S 4N7

Our Ref: 123888-6.04.01



Demetrius Yannouloupoulos, P.Eng
Director | Office Lead

Ryan Magladry, C.E.T
Associate | Manager, Land Engineering

Ryan Robineau, P.Eng
Intermediate Engineer, Land Engineering

This document is intended only for the use of the individual or entity for which it was prepared and may contain information that is privileged, confidential and exempt from disclosure under applicable law. Any dissemination, distribution or copying of this document is strictly prohibited.

Contents

1	Introduction.....	1
2	Water Distribution.....	2
2.1	Existing Conditions	2
2.2	Design Criteria	3
2.2.1	Water Demands.....	3
2.2.2	System Pressures.....	3
2.2.3	Fire Flow Rate	3
2.3	Conceptual Water Plan.....	4
3	Wastewater System	4
3.1	Existing Conditions	4
3.2	Design Criteria	4
3.3	Conceptual Wastewater Plan	5
4	Stormwater Management.....	6
4.1	Background.....	6
4.2	System Concept.....	6
4.2.1	Minor System	7
4.2.2	Major System	7
4.3	Hydrological Analysis	7
4.3.1	Design Storms and Drainage Area Parameters.....	7
4.3.2	Design Storms	7
4.3.3	Run-Off Coefficients.....	8
4.3.4	Time of Concentration.....	8
4.3.5	Area and Imperviousness:.....	8
4.4	Conceptual Storm Sewer System	8
4.5	Conceptual Wetland Restoration Plan	9
5	Source Controls (LID's).....	9
5.1	General.....	9
5.2	Lot Grading	9
5.3	Roof Leaders.....	10
5.4	Vegetation	10
5.5	Buffer Block	10
6	Conveyance Controls.....	10

6.1	General.....	10
6.2	Flat Vegetated Swales	10
6.3	Catchbasins	11
6.4	Pervious Rear Yard Drainage	11
7	Sediment and Erosion Control Plan	11
7.1	General.....	11
7.2	Trench Dewatering	11
7.3	Temporary Flow Controls in Existing Manholes	12
7.4	Seepage Barriers	12
7.5	Surface Structure Filters.....	12
7.6	Stockpile Management.....	12
8	Roads	13
9	Soils	13
10	Recommendations.....	15

List of Figures

Figure 1.1 Site Location.....	1
-------------------------------	---

Appendices

Legal Plan.....	A
Pre-Consult Meeting Notes.....	A
Drawing 39617-100 General Plan	B
Figure 2.1 – Conceptual Water	B
EUC Drainage Area Markup.....	C
EUC & Actual Flow Comparison	C
Figure 3.1 – Conceptual Sanitary Sewer Plan	C
Figure 3.2 – Conceptual Sanitary Drainage Areas	C
Updated Phase 3 Sanitary Sewer Design Sheets.....	C
Figure 4.1 – Conceptual Storm Sewer Plan	D
Figure 4.2 – Conceptual Storm Drainage Areas	D
Updated Phase 3 Storm Sewer Design Sheets.....	D
Figure 5.1 – Preliminary Erosion and Sediment Control Plan	E
Paterson Group Geotechnical Report.....	E
Figure 6.1 – Conceptual Grading	E
City of Ottawa Servicing Study Guidelines Checklist.....	E

1 Introduction

Arcadis Professional Services (Canada) Inc. (formerly IBI Group) has been retained by Claridge Homes to prepare an Adequacy of Public Services Report (APSR) to support the proposed draft plan application for Phase 5/6 of their Spring Valley Trails (SVT) residential development in the City of Ottawa, formerly the Town of Gloucester.

Spring Valley Trails Phases 1 to 5 is a 35.65 ha parcel owned and developed by Claridge Homes. Recently, Claridge purchased the 7.88 Ha property directly abutting the developments eastern boundary and proposes to develop it in conjunction with Phase 5; hence, the notation is Phase 5/6. The previous four phases of SVT have all been designed approved and municipal services installed and operational.

The SVT development is part of the East Urban Community (EUC) and is subject to the EUC Design plan update which identified this area for low and medium density residential usages.

Phase 5/6 is bounded by Navan Road to the North, Trans Canada Trail (formerly CP railway corridor) and Mer Bleue Conservation area to the south, existing residential lands (previous phases of Spring Valley Trails) to the west, and undeveloped rural land and the Navan Road waste management facility (BFI Canada Inc.) to the east. Refer to key plan on **Figure 1.1** for site location.



Figure 1.1 Site Location

The proposed development consists of typical low and medium density residential suburban construction for the Ottawa surroundings. A total of 76 single family homes, and 134 townhomes, are proposed to be constructed within the 12.71 Ha Phase 5/6. A copy of the proposed draft Plan of Subdivision, prepared by AOV, is included in **Appendix A**.

This ASPR supports the draft plan application by demonstrating that the existing municipal water, sanitary and storm infrastructure is capable of servicing the proposed subdivision. The conceptual servicing design conforms to current City of Ottawa and MOE design criteria. Since the SVT development is part of the approved EUC MSS and no downstream works are required to accommodate the sanitary sewer or storm sewer systems, and the storm sewer system discharges into the existing EUC SWM pond 3, no pre-consultation meetings were requested from the Rideau Valley Conservation Authority (RVCA) or the Ministry of Environment of Ontario (MOE). A pre-consultation meeting was held with the City and the meeting notes are included in **Appendix A**. In February 2020 a submission was made to the City of Ottawa and comments were received in April of 2020. Copy of email from the City Planner summarizing comments received is included in **Appendix A**. This report builds on the previous submission with a modified draft plan to address City and agency comments.

In addition to this report, the subject area is supported by the following reports:

- EUC Pond 3 detail design
- EUC MSS
- Phase 1 Detail Design Report
- Phase 2 Detail Design Report
- Phase 3 Detail Design Report

2 Water Distribution

2.1 Existing Conditions

The Spring Valley Trails (SVT) development is located within the City of Ottawa pressure zone 2E. The March 2005 Stantec EUC Infrastructure Servicing Study update (MSS), which outlined the proposed water distribution system for the EUC, identified 300 mm diameter watermain along Renaud Road and Navan Road, a 300 mm diameter main along Joshua Street was also identified to connect the above noted mains. As part of SVT Phase 3, there are several existing watermain adjacent to the site including 300 mm diameter watermain along Joshua Street, 200 mm diameter watermain along Knotridge Street, Broadridge Crescent and a 150 mm diameter along Winterhaven Drive and Perrodale Way. All of these have been constructed to the limits of the proposed development. Phase 3 General Plan 100 in **Appendix B** illustrates the location of the existing water plant adjacent to the site.

2.2 Design Criteria

2.2.1 Water Demands

Phase 5/6 consists of a mix of single-family homes, street townhomes, back-to-back units and apartments. Per unit population density and consumption rates are taken from **Tables 4.1** and **4.2** at the Ottawa Design Guidelines – Water Distribution and are summarized as follows:

- Single Family 3.4 person per unit
- Townhouse and Semi-Detached 2.7 person per unit
- Average Apartment 1.9 person per unit
- Residential Average Day Demand 350 l/cap/day
- Residential Peak Daily Demand 875 l/cap/day
- Residential Peak Hour Demand 1,925 l/cap/day

2.2.2 System Pressures

The 2010 City of Ottawa Water Distribution Guidelines states that the preferred practice for design of a new distribution system is to have normal operating pressures range between 345 kPa (50 psi) and 552 kPa (80 psi) under maximum daily flow conditions. Other pressure criteria identified in the guidelines are as follows:

Minimum Pressure	Minimum system pressure under peak hour demand conditions shall not be less than 276 kPa (40 psi).
Fire Flow	During the period of maximum day demand, the system pressure shall not be less than 140 kPa (20 psi) during a fire flow event.
Maximum Pressure	Maximum pressure at any point in the distribution system in unoccupied areas shall not exceed 689 kPa (100 psi). In accordance with the Ontario Building/Plumbing Code the maximum pressure should not exceed 552 kPa (80 psi) in occupied areas. Pressure reduction controls may be required for buildings where it is not possible/feasible to maintain the system pressure below 552 kPa.

2.2.3 Fire Flow Rate

The Fire Underwriters Survey (FUS) method of calculating fire flow requirements is to be used in accordance with the Ottawa Design Guidelines – Water Distribution. In the FUS method, wood frame buildings with separations less than three meters are considered one fire area. Buildings in the SVT Phase 5/6 development are wood frame buildings, with separation less than three meters. Similar to Phase 3, the expected fire flow rating will be 10,000 l/min. This will be confirmed at detailed design.

2.3 Conceptual Water Plan

At detail design, a Hydraulic Model of the water network will be developed to ensure both domestic and fire flows are achieved. **Figure 2.1** in **Appendix B** illustrates the conceptual layout of the water network. Based on the observed results of the adjacent Phase 3, it is anticipated the units in the south end of Phase 5/6 will require pressure reducing valves due to ground elevation change.

3 Wastewater System

The wastewater system approved for the East Urban Community (EUC) is outlined in the EUC infrastructure Servicing Study Update, dated March 2005, prepared by Stantec. The servicing study identified a 375/300 mm diameter trunk sanitary sewer (Trunk 4) within Joshua Street to service the SVT lands. The sewer also services the residential lands between SVT and Navan Road including a 1.3 Ha allocation for future commercial development. The trunk sewers ultimately drain to the Forest Valley Pump Station, located on Renaud Road.

3.1 Existing Conditions

Phases 1 to 4 of SVT have been constructed and are operational. Those works also included the extension of municipal services to the limits of Phase 3 to support the development of SVT Phase 5/6. Two sanitary connection points will be utilized to service Phase 5/6. They include a 200 mmØ on Joshua Street, a 250 mmØ on Winterhaven Drive. Phase 3 General Plan 100 in **Appendix B** illustrates the connection points.

3.2 Design Criteria

The sanitary flows for Phase 5/6 of the SVT development are based on the City of Ottawa design criteria which includes, but it not limited to the following:

Population (Residential)	3.4 persons per single family unit
	2.7 persons per semi or townhouse unit
	1.9 persons per apartment unit
Domestic Flow:	280l/cap/day
Peak Factor (Residential only)	Harmon Formula
Institutional/Industrial/Commercial:	28,000l/d/Ha
Peak Factor (ICI only)	1.0
Extraneous Flow (Infiltration)	0.33l/s/Ha
Minimum Pipe Size:	200mm diameter

3.3 Conceptual Wastewater Plan

The Infrastructure Servicing Update Study identified a 375 mm sanitary sewer, trunk #4, along Joshua Street to service a projected tributary area of 69.74 hectares, with an estimated population of 3,457 plus commercial and institutional uses. The projected peak flow was 70.58 L/s.

To date, the sewer services 506 singles, 88 semis, 543 townhouses, and 48 apartment units. Future phases 5 and 6 will add 76 singles, 140 townhouses, and approximately 1.31 hectares of commercial land. Combined, this results in 582 singles, 88 semis, 683 townhouses, 48 apartment units, along with 2.3 hectares of school and 1.31 hectares of commercial land. Please note, townhouse block 92 shown on the **Proposed Unit Layout on Phase 5** by AOV, had previously been part of Phase 3. It is anticipated the six townhouses will be serviced via the future sewer within Street No.3 and any existing service laterals installed as part of Phase 3 will need to be blanked at the main.

Using current design densities; 3.4 persons per unit for singles, 2.7 for semis and townhouses, and 1.8 for apartments, the projected total population is approximately 4,147. The updated peak flow, including allowances for ICI and infiltration, is 68.98L/s, which is slightly less than the original estimate. The outlet sewer has a design capacity of 85.79 L/s, confirming that there is capacity for both existing and proposed development. **Appendix C** provides a comparison of the original EUC projection and the actual design flows and confirms downstream capacity.

During design of the Forest Valley pump station, the impacts from catastrophic failure were reviewed. Specifically, if the pump station failed during a major, 100-year storm event, while the sanitary system was under peak loading. The sanitary sewer system would become overwhelmed and surcharge, creating a Hydraulic Grade Line (HGL) in the pipe network. The sanitary sewer surcharge levels were investigated, and Stantec Engineering completed a sanitary sewer HGL analysis under the above noted conditions. To minimize the sanitary HGL, two emergency overflows were installed at MH101B and 120B of SVT Phase 1. The analysis was updated in support for the previously approved Phase 3. Since the current proposed flows are less than the flows used in the above noted analysis (reduced due to City revising design criteria 350 l/p/d to 280l/p/d and ICI from 50,000 l/Ha/d to 28,000 l/Ha/d and infiltration from 0.28 l/s/Ha to 0.33 l/s/Ha), no system impact on the downstream HGL is anticipated.

Figure 3.1 in Appendix C illustrates the conceptual layout of the sanitary sewer network to service phase 5/6, and the Phase 3 sanitary sewer design sheets have been updated to include the proposed conceptual extension of municipal services. The inclusion of Phase 5/6 will not have a negative impact on the existing downstream sanitary sewer system. The sewers within Phase 5/6 will be designed to meet City of Ottawa and MOE requirements.

4 Stormwater Management

4.1 Background

As identified within Section 1, the development is part of the East Urban Community (EUC) and is subject to the EUC Design plan update which identified this area for low and medium density residential usages. In accordance with the EUC servicing study, stormwater from the neighbourhood will be conveyed to an end of pipe SWM treatment facility, identified in the EUC Infrastructure Servicing Study as Pond 3. Pond 3 has been constructed and is operational. For details on the SWM facility, see Stantec Report EUC SWM Facility #3 Design Brief, dated August 22, 2005, henceforth referred to as the 2005 Pond 3 Design Brief. The EUC infrastructure servicing study report of March 2005 also indicated the development lands are to restrict stormwater flow into the piped system to an average of 85 l/s/Ha.

Following the approval of the 2005 EUC infrastructure servicing study report, Ashcroft Homes advanced the design of their development north of Navan Road. A portion of their site was tributary to Pond 3 and was serviced through SVT. Ashcroft requested and received approval to redirect flow to Pond 2 from Pond 3. To support their proposal the design of the trunk storm sewer tributary to Pond 2, the drainage area tributary to Pond 2 were all redefined as outlined within the report 'Gloucester East Urban Community Phase 2 Infrastructure Servicing Study Update' (Stantec, September 27, 2013). Approximately 29.8ha of land which was formerly tributary to the existing Pond 3 SWM Facility would be directed towards the proposed Pond 2 SWMF. Please refer to Drawing 2 titled 'Storm Sewer System' provided within **Appendix C** of this report which identifies Ashcrofts' updated area tributary to Pond 2. Subsequent to that report, detail design was completed and the total drainage area re-directed to the EUC Pond 2 SWM facility from the Ashcroft Lands is 32.7 Ha. The removal of this drainage area equates to an approximate 2779 l/s of additional capacity within the existing trunk storm sewer within the SVT system and Phase 3 was designed accordingly. Phase 3 provided multiple points of connection with the major sewers being a 825 mm diameter sewer in Joshua Street, and a 975 mm diameter sewer in Winterhaven Drive.

4.2 System Concept

The stormwater management system for the site incorporates standard urban drainage design and stormwater management features that can be summarized as follows:

- a dual drainage concept;
- routing of surface runoff;
- wetland infiltration system; and,
- an end-of-pipe SWM facility (existing EUC pond 3).

The stormwater management system has been developed based on the MOE *Stormwater Management Planning and Design Manual* (March 2003) and the *City of Ottawa Sewer Design Guidelines* (October 2012). Additionally, the system has incorporated, wherever possible given the existing trunk sewer inlet capacity restrictions, the new guidelines set forth within the Technical Bulletin PIEDTB-2016-01.

4.2.1 Minor System

The minimum minor system capture of ICDs for the SVT Ph 5/6 site will be based on 2-year SWMHYMO generated flows for individual areas. The subject site will be modelled using SWMHYMO to confirm minor and major system flows. Hydrographs from the site will be downloaded to XPSWMM hydraulic model to confirm hydraulic grade line within the proposed storm sewers.

4.2.2 Major System

Inlet control devices (ICDs) will be proposed to control the surcharge in the minor system during infrequent storm events and maximize the use of available on-site storage. Due to the relatively steep topography across a portion of the site, on-site storage is mainly limited to the South portion of the site. Surface runoff in excess of the minor system capture will cascade via street segment blocks to the SWM pond or for the southern section released into the buffer area.

4.3 Hydrological Analysis

Hydrological analysis of the proposed dual drainage system of the subject site will be conducted using SWMHYMO. This technique offers a single storm event flow generating and routing.

The primary focus of the hydrological analysis will be to evaluate surface flow and ponding conditions during the 100-year storm event to satisfy City of Ottawa Sewer Design Guidelines (2012) in terms of velocity x depth. The 2-year simulation will be performed to confirm there will be no ponding on the streets during that storm event. The parameters to be used to model the subject site are presented below.

4.3.1 Design Storms and Drainage Area Parameters

The following design parameters will be used in the evaluation of the stormwater management system for the subject site:

4.3.2 Design Storms

- 2-, 5- and 100-year, 12-hour SCS type II storm event, consistent with the Carp River Model Calibration Validation Exercise Draft Final Report (Greenland, April 29, 2011);
- 5- and 100-year, 3-hour Chicago storm event with a 10-minute time step, including a 100 year + 20% 3 hr Chicago storm per ISDTB-2012-1;
- July 1, 1979 and August 8, 1996 Historical storms as per the City of Ottawa Sewer Design Guidelines (2012);
- 100-year, 12-hour SCS type II storm event with a 20% increase in intensity, as per the Technical Bulletin ISDTB-2012-1

4.3.3 Run-Off Coefficients

The run-off coefficients for the minor system design will be derived from an analysis of a representative sample of the proposed development area. To be confirmed at detail design, it is anticipated the coefficients will be similar to the following:

	C^{Ave}
Single/Townhome Mix	0.70
Town Homes/Back to Back	0.8
Low Rise Apartments	0.8
Commercial	0.8

4.3.4 Time of Concentration

Inlet times of 10 min. for street segments and rear yard inlets will be utilized as per the City of Ottawa Sewer Design Guidelines (2012).

4.3.5 Area and Imperviousness:

The catchment areas and imperviousness values are based on the rational method spreadsheet. The total and directly connected imperviousness ratios will be based upon the previous and impervious areas for the front yard and rear yard catchment areas.

4.4 Conceptual Storm Sewer System

Figure 4.1 in **Appendix D** illustrates a conceptual layout of the storm sewer network to service Phase 5/6 and the Phase 3 storm sewer design sheets have been updated to illustrate the existing downstream infrastructure is suitably sized to accommodate the proposed development. The storm sewers for Phase 5/6 will be designed to meet City of Ottawa and MOE requirements.

Figure 4.1 also illustrates an existing ditch which starts from Navan Road runs along the eastern limits of the site and eventually crosses diagonally across the lower half of the site discharging into the wet land buffer zone. The upper section which runs along the eastern limits will be located within a 20m buffer, the section which crosses diagonally will be realigned to follow the 20m buffer along the eastern limits and discharge into the adjacent wetlands buffer zone.

4.5 Conceptual Wetland Restoration Plan

Through coordination with the RVCA, IBI Group's Natural Heritage System team requested that an effort be made to increase the runoff directed to the Wetland Area south of Winterhaven, as a result of flows North of Navan Road being redirected by another developer.

The stormwater from the southern half of the site will be directed to the NEA. It passes through an OGS providing Level II enhanced treatment (80%% TSS Removal) and a backwater valve. The outlet will be located just below the surface of the existing ground so that the water recharges the wetland area. The backwater valve will be installed in the outlet pipe to ensure the new outlet pipe does not drain the area intended for recharge.

The storm sewer system has been designed in such a way that when the wetland area is fully saturated, and the outlet pipe has filled with water. The excess storm water will be able to pass by the outlet pipe and continue through to the existing phase 3 storm sewer pipes to the eventual end of pipe SWM treatment facility, as was intended in the EUC design.

To convey even more stormwater to the wetland, rear-yard catch basins for lots backing onto the drainage block will collect the clean stormwater from the backyards of the houses and outlet directly to the swale that flows along the eastern property line, in a southerly manner towards the wetland.

5 Source Controls (LID's)

5.1 General

As noted, an existing stormwater management facility provides end of pipe quantity and quality treatment for captured stormwater. In addition to the stormwater management facility, on site level or source control management of runoff will be provided. Such controls or mitigative measures are proposed for the development not only for final development but also during construction and build out. Some of these measures are:

- flat lot grading;
- split lot drainage;
- Roof-leaders to vegetated areas;
- vegetation planting; and
- groundwater recharge.

5.2 Lot Grading

Residential lots within the development will typically make use of the split drainage runoff concept. In accordance with local municipal standards, all lot grading will be between 2.0 and 7.0 percent. All front yard drainage will be directed over landscaped front yards to the roadway system and all rearyard drainage will be directed to a swale drainage system. Typically swales will have slopes of 2%. These measures all serve to encourage individual lot infiltration.

5.3 Roof Leaders

Phase 5/6 of the development will consist of single family lots and townhomes. It is proposed that roof leaders from these units be constructed such that runoff is directed to grass areas adjacent to the units. This will promote water quality treatment through settling, absorption, filtration and infiltration and a slow release rate to the conveyance network.

5.4 Vegetation

As with most subdivision agreements, the developer will be required to complete a vegetation and planting program. Vegetation throughout the development including planting along roadsides and within public parks provides opportunities to re-create lost natural habitat.

5.5 Buffer Block

The existing/realigned ditch along the eastern limits of the site will be within 6m wide buffer this green space will provide the opportunity to employ bioswales or rain gardens. Similarly, the rear lot drainage from the lots backing onto the Mer Bleue wetland buffer can flow into bioswales outletting to the buffer rather than being collected and discharging into the municipal storm sewer system.

6 Conveyance Controls

6.1 General

Besides source controls, the development also proposes to use several conveyance control measures to improve runoff quality. These will include:

- flat vegetated swales;
- catchbasin and maintenance hole sumps; and
- pervious rearyard drainage.

6.2 Flat Vegetated Swales

The development will make use of relatively flat vegetated swales where possible to encourage infiltration and runoff treatment.

6.3 Catchbasins

All catchbasins within the development, either rear yard or street, will be constructed with minimum 600 mm deep sumps. These sumps trap pollutants, sand, grit and debris which can be mechanically removed prior to being flushed into the minor pipe system. Both rear yard and street catchbasins will be fabricated to OPSD 705.010 or 705.020. All storm sewer maintenance holes servicing local sewers less than 900 mm diameter shall be constructed with a 300 mm sump as per City standards.

6.4 Pervious Rear Yard Drainage

Some of the rearyard swales make use of a filter wrapped perforated drainage pipe constructed below the rear yard swale. This perforated system is designed to provide some ground water recharge and generally reduce both volumetric and pollutant loadings that enter the minor pipe system. Typically, a 250 mm diameter perforated pipe wrapped in filter sock is constructed in a crushed clear stone surround at an invert elevation of approximately 0.8 m below grade. These pipes are in turn directly connected to rear yard catchbasins at regular intervals as per City Standards.

7 Sediment and Erosion Control Plan

7.1 General

During construction, existing stream and conveyance systems can be exposed to significant sediment loadings. It is proposed to introduce a number of mitigative construction techniques to reduce construction sediment loadings. A preliminary erosion and sediment control plan has been prepared and is included in **Appendix E**. These will include:

- groundwater in trenches will be pumped into a filter mechanism prior to release to the environment;
- bulkhead barriers will be installed at the nearest downstream manhole in each sewer which connects to an existing downstream sewer;
- seepage barriers will be constructed in any temporary drainage ditches; and
- Filter cloths will remain on open surface structure such as manholes and catchbasins until these structures are commissioned and put into use.

7.2 Trench Dewatering

During construction of municipal services, any trench dewatering using pumps will be discharged into a filter trap made up of geotextile filters and straw bales similar in design to the OPSD 219.240 Dewatering Trap. These will be constructed in a bowl shape with the fabric forming the bottom and the straw bales forming the sides. Any pumped groundwater will be filtered prior to release to the existing surface runoff. The contractor will inspect and maintain the filters as needed including sediment removal and disposal and material replacement as needed.

7.3 Temporary Flow Controls in Existing Manholes

Temporary flow controls are proposed at the outlet of existing manholes, or where a stub was provided, the first upstream manhole outlet. Temporary flow controls will be sized based on the peak flows for sanitary sewers.

Temporary flow controls are to be maintained during construction and shall not be removed until a letter of conformance has been issued by the Engineer confirming that upstream sewers, services, inlet control devices (where applicable) and base course asphalt have been constructed.

7.4 Seepage Barriers

The presence of roadside ditches along Navan Road and the proximity of the Mer Bleue wetland necessitates the installation of seepage barriers. These barriers will consist of both the Light Duty Straw Bale Barrier as per OPSD 219.100 or the Light Duty Silt Fence Barrier as per OPSD 219.110. The barriers are typically made of layers of straw bales or geotextile fabric staked in place. All seepage barriers will be inspected and maintained as needed.

7.5 Surface Structure Filters

To prevent sediment from entering the minor storm system all catchbasins and manholes will be equipped with geotextile filter socks. These measures will stay in place and be maintained during construction until it is appropriate to remove them.

7.6 Stockpile Management

During construction of any development similar to that being proposed both imported and native soils are stockpiled. Mitigative measures and proper management to prevent these materials entering the sewer systems is needed.

During construction of the deeper municipal services, water, sewers and service connections, imported granular bedding materials are temporarily stockpiled on site. These materials are however quickly used up and generally before any catchbasins are installed. Street catchbasins are installed at the time of roadway construction and rearyard catchbasins are usually installed after base course asphalt is placed.

Contamination of the environment as a result of stockpiling of imported construction materials is generally not a concern since these materials are quickly used and the mitigative measures stated previously, especially the use of filter fabric in catchbasins and manholes help to manage these concerns.

The roadway granular materials are not stockpiled on site. They are immediately placed in the roadway and have little opportunity of contamination. Lot grading sometimes generates stockpiles of native materials. However, this is only a temporary event since the materials are quickly moved off site.

If during construction excavated onsite material is suspected of being contaminated or hazardous, the material is to be stockpiled separately complete with sediment and erosion controls to suit the specific needs. The material shall be tested by a qualified firm and depending on the specific contaminate, dealt with in the recommended manner.

8 Roads

Vehicular access to Phase 5/6 is provided by multiple local street connections to the existing SVT subdivision. The draft plan of subdivision identifies a combination of 18.0m and 20m local right of ways, with 8.5m asphalt widths throughout, with the exception of Joshua Street, which is proposed as a 26.0m collector right of way, with 11.0m asphalt.

A collector road connection (Joshua Street) is provided for future lands to the east, with a view to ultimately being extended to Navan Road.

In support of detail design, an environmental noise impact assessment will be prepared to assess noise impact from traffic along Navan Road and Joshua Street. There are locations where outdoor living areas are exposed to vehicular generated noise. These areas include rear yards and side yard flankages in close proximity to Navan Road and Joshua Street, and rear yards which are not yet shielded by the future commercial development. It is anticipated the results of the Environmental Noise Impact Assessment will include but are not limited to the following:

- Noise Barrier along Navan Road
- Noise Barrier along Joshua Street
- Indoor and Outdoor noise clauses for various units, with various requirements

9 Soils

Paterson Group geotechnical investigation dated October 9, 2020 provides details on the existing soils within the development. A copy of the report is included in **Appendix E**. The report contains recommendations which include but are not limited to the following:

- Grade raise constraints are recommended for Phase 5/6 are identified within the report PG5224-1 as 3 separate areas. Area 1 with a permissible grade raise of 2.5m, and Area 2 with a permissible grade raise of 1.0 m and area 3 with a permissible grade raise of 0.5 m.
- A temporary PTTW may be obtained from MECP if greater than 400,000l/day of ground or surface water is to be pumped during construction.
- In areas where finished grade exceeds grade raise limits, preloading and surcharging can be employed to induce required settlement, light weight fill may also be used, or a combination of surcharging and light weight fill, as per the Geotechnical recommendations
- Fill placed below the foundations to meet OPSS Granular 'A' or Granular 'B' Type II placed in 300 mm lifts compacted to 98% SPMDD.
- Fill for roads to be suitable native material in 300mm lifts compared to 95% SPMDD

- Pavement Structure:

Driveways

50mm HL3 superpave 12.5mm

150mm Granular 'A'

300mm Granular 'B' Type II

Local Road

40mm HL3 superpave 12.5mm

50mm superpave 19mm

150mm Granular 'A'

400mm Granular 'B' Type II

Collector Road

40mm HL3 superpave 12.5mm (wear)

50mm superpave 19mm (upper binder)

50mm superpave 19 mm (lower binder)

150mm Granular 'A'

600mm Granular 'B' Type II

A conceptual grading plan for Phase 5/6, **Figure 6.1**, is included in **Appendix E**, the plan follows the grade raise constraints noted above. At detail design, the grading plan will be developed in concert with the building type, geotechnical constraints, and City of Ottawa Design Guidelines. The geotechnical engineer will review the detailed grading plan and provide their acceptances of the grades relative to the geotechnical constraints prior to submission to the City of Ottawa for review/approval.

10 Recommendations

Water, wastewater and stormwater systems required to develop Phase 5/6 of Spring Valley Trails will be designed in accordance with MOE and City of Ottawa's current level of service requirements.

The use of lot level controls, conveyance controls and end of pipe controls outlined in the report will result in effective treatment of surface stormwater runoff from the site. Adherence to the proposed sediment and erosion control plan during construction will minimize harmful impacts on surface water. Consultation with Conservation Authority and DFO regarding potential permits. Developer/Builder to review possibility of incorporating LID features.

Final detail design will be subject to governmental approval prior to construction, including but not limited to the following:


- Phase 5/6 Commence Work Order: City of Ottawa
- Phase 5/6 ECA (sewers): MOE
- Phase 5/6 Watermain Approval: City of Ottawa
- Phase 5/6 Commence Work Order (utilities): City of Ottawa

This report was proposed in accordance with the City's Development Servicing Study Guidelines, see study checklist in **Appendix E**.

Appendix A

Legal Plan

Pre-Consult Meeting Notes

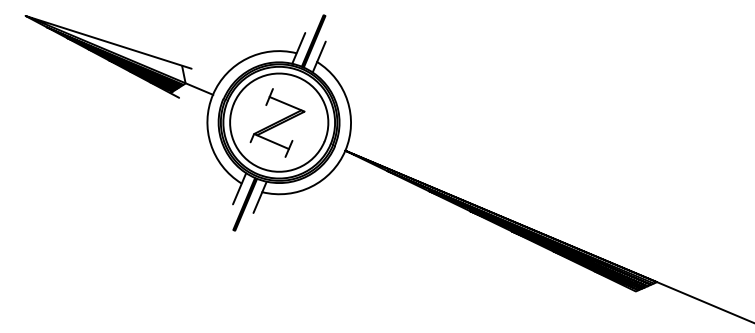


REVISION SCHEDULE			
NO.	REVISION	DATE	BY
10	REVISIONS	NOV. 25, 2025	N
9	ADDITIONAL TOWNS CONVERTED TO SINGLES	NOV. 20, 2025	N
8	PHS THBLKS REPLACED BY SINGLES	NOV. 13, 2025	N
6	REVISED BLOCK LAYOUT	OCT. 22, 2025	N
5	REVISED DEPTH BLOCKS 30, 31	OCT. 9, 2025	N
4	WIDENING ADDED	OCT. 8, 2025	N
3	REVISED LAYOUT	JUNE 9, 2020	N
2	TOWNHOUSE UNITS ADDED	MAR. 18, 2020	N
1	PLAN PREPARED FOR DISCUSSION	FEB. 25, 2020	N

SUBJECT TO THE CONDITIONS, IF ANY, SET FORTH IN OUR LETTER DATED _____

THIS DRAFT PLAN IS APPROVED BY THE CITY OF OTTAWA UNDER SECTION 51 OF THE PLANNING ACT.
THIS _____ DAY OF _____ 20____

JOHN SEVIGNY, MCIIP RPP, ACTING MANAGER,
DEVELOPMENT REVIEW-EAST
PLANNING, DEVELOPMENT AND BUILDING SERVICES
DEPARTMENT, CITY OF OTTAWA

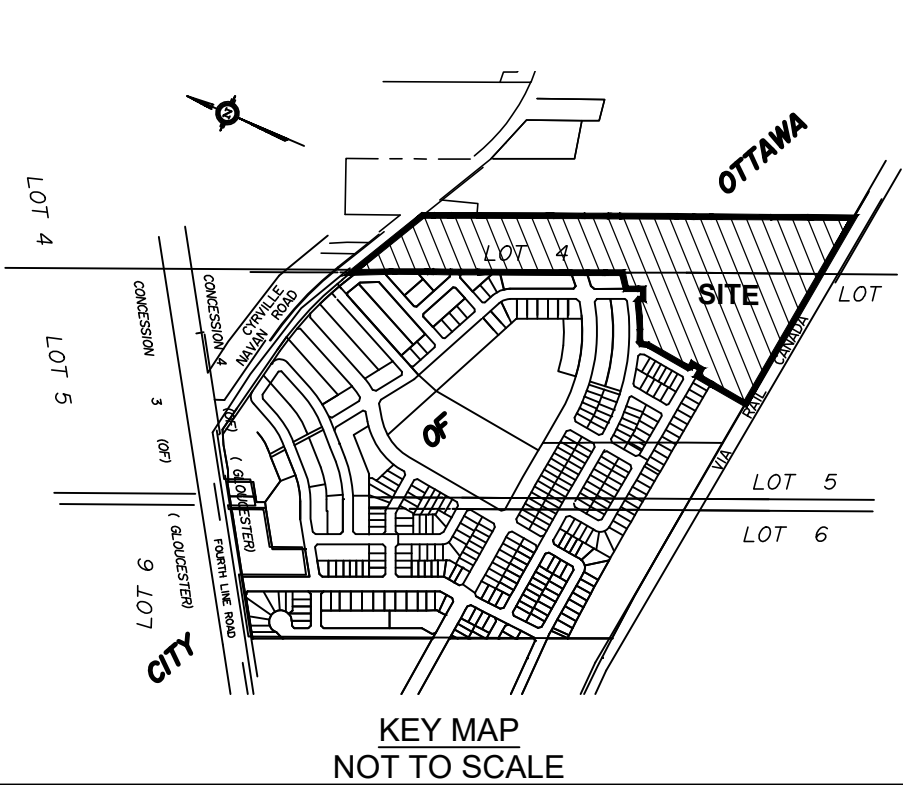

DRAFT PLAN OF SUBDIVISION OF
PART OF LOTS 4 and 5
CONCESSION 4 (OTTAWA FRONT)
Geographic Township of Gloucester
and
BLOCK 86
REGISTERED PLAN 4M-1614
CITY OF OTTAWA
Prepared by Annis , O'Sullivan , Vollebekk Ltd.

Scale 1 : 1000

Metric
DISTANCES SHOWN ON THIS PLAN ARE IN METRES AND
CAN BE CONVERTED TO FEET BY DIVIDING BY 0.3048

SURVEYOR'S CERTIFICATE

I CERTIFY THAT:
The boundaries of the lands to be subdivided and their relationship to
adjoning lands have been accurately and correctly shown.

Date _____ T. Hartwick
ONTARIO LAND SURVEYOR

OWNER'S CERTIFICATE

This is to certify that I am the agent / owner of the lands to be subdivided and that this
plan was prepared in accordance with our instructions.

Date _____ Jim Burghout
CLARIDGE HOMES (CARSON) INC.
I have authority to bind the corporation.

Date _____ Jim Burghout
2721338 Ontario Limited
I have authority to bind the corporation.

ADDITIONAL INFORMATION REQUIRED UNDER SECTION 51-17 OF THE PLANNING ACT

- (a) see plan
- (b) see plan
- (c) see plan
- (d) single family, multi-family residential housing, open space
- (e) see plan
- (f) see plan
- (g) see plan
- (h) City of Ottawa
- (i) see soils report
- (j) see plan
- (k) sanitary, storm sewers, municipal water, bell, hydro, cable and gas to be available
- (l) see plan

AREA SCHEDULE		
PROPOSED USE	LOT/BLOCK	AREA (sqm)
SINGLE UNITS	1 - 76	31 953
TOWNHOMES	77-111	31 287
WALKWAYS	113, 114	357
STREETS/ WIDENING	---	23 541
OTHER	118	25 124
	115	8 679
	116	1 669
	117	4 203
TOTAL		126 813

Fwd: 3252 Navan Road - Plan of subdivision and Zoning Amendment

Jim Burghout <jim.burghout@claridgehomes.com>
To: Vincent Denomme <vincent.denomme@claridgehomes.com>

Thu, Dec 12, 2019 at 9:52 AM

When you have a spare hour or two to review... looks like we can proceed with just zoning first, and then follow up with subdivision if our buffer study is not rejected

----- Forwarded message -----

From: **Murshid, Shoma** <Shoma.Murshid@ottawa.ca>
Date: Wed, Dec 11, 2019 at 8:55 AM
Subject: **3252 Navan Road** - Plan of subdivision and Zoning Amendment
To: Jim Burghout <jim.burghout@claridgehomes.com>
Cc: Rehman, Sami <Sami.Rehman@ottawa.ca>, Knight, Melanie (Planning) <Melanie.Knight@ottawa.ca>, Richardson, Mark <Mark.Richardson@ottawa.ca>, Gervais, Josiane <josiane.gervais@ottawa.ca>, Lacroix, Julien <julien.lacroix@ottawa.ca>, Thivierge, Mike <mike.thivierge@ottawa.ca>

Good morning Jim,

Thank you for meeting with us last Wednesday, December 4, 2019, to discuss the plan of subdivision and zoning by-law amendment for blocks of (48) apartment dwelling units, 44 back to back townhouses, 218 on-street towns and 11 single family lots at **3252 Navan Road**.

Before I proceed to summarize the requirements of the triggered development applications, Plan of Subdivision and a Major Zoning By-law amendment, I must also mention a Lifting of 30 cm Reserve application will be required, prior to the registration of the subdivision.

A letter of clearance from the Landowner's Group shall be required prior to subdivision registration. A Record of Site Condition will also be required prior to subdivision registration.

You may wish to submit the Zoning Amendment application prior to the Plan of Subdivision in this particular case. We typically do not accept zoning amendment applications independently of the plan of subdivision, however in rare instances, accepting a submission and proceeding to circulation may seem appropriate. In this case, we will accept a Zoning Amendment application independently of the Plan of Subdivision and will be able to complete the circulation. However, I will not proceed to drafting up recommendations to Planning Committee for a Zoning Amendment until a Plan of Subdivision has been, at minimum 'draft approved'. *Please note that consideration of a Zoning Amendment independent of the Plan of Subdivision submission is an exception in this case and certainly not the rule. This sequencing of development application submissions will not set a precedence, as all proposals have differing contextual situations.

If you wish to exercise submitting a Zoning Amendment first, I will be in a position to deem it complete, provided you submit completed plans and reports, as identified below, along with a completed application form with required fees. **The plans and reports required at time of submission for a Zoning Amendment (Major)** shall be:

Draft Plan of Subdivision and/or Concept Plan (4 plans + PDF)

Survey Plan (2 plans + PDF)

Planning Rationale, including details of requested rezoning, clay soil type and requested front yard and corner side yard setbacks for accommodation of trees. (2 reports + PDF)

Preliminary Typical Block/Lot Plan (2 plans + PDF)

Archaeological Assessment report (4 reports + PDF)

Servicing/Design Brief and Stormwater Management Report (3 Reports+ PDF)

Geotechnical Report with Slope Stability and Hydrogeotechnical Components (2 reports+ PDF)

Phase 1 ESA (4 reports + PDF)

Phase 2 ESA (4 reports + PDF)

Landfill Buffer Impact Study (4 reports + PDF)
TIA (4 reports + PDF)
Noise Impact Study (2 reports + PDF)
Tree Conservation Report (3 reports + PDF)
EIS (4 reports + PDF)

I can exercise proceeding to circulation, however, I cannot guarantee that the City's Real Estate Dept. will provide an exhaustive review and/or approval of the Landfill Buffer Impact Study under the Zoning Amendment process. If they do not approve under the Zoning Amendment for any reason, you may have to consider the submission of a Plan of Subdivision and having it run its course.

N.B. The following fees are subject to change once 2020 rings in. Today, a Major Zoning by-law Amendment's submission fees are **\$16,960.99 + Initial Conservation Authority Fee of \$370.00**. If multiple applications are being submitted concurrently for the same lands (i.e. a Plan of Subdivision), then a 10% reduction shall occur on the planning fee component of said applications. As this is for approximately 320 dwelling units, the triggered Subdivision process is 'Application for a New Development, 251 or more dwelling units' and its associated submission fee shall be (in 2019) the accumulation of **\$76,368.51 + an Initial Engineering Design Review and Inspection, between \$5K to \$10K (based on the value of infrastructure and landscaping) + an Initial Conservation Authority Fee of \$3,685.00.**

To deem a Plan of Subdivision complete at time of submission, please submit the following completed plans and reports, along with a completed application form and required fees. The **plans and reports required at time of submission for this Plan of Subdivision** are:

Draft Plan of Subdivision (including AutoCAD or MicroStation CAD format) (4 plans + PDF)
Survey Plan (2 plans + PDF)
Topographical Plan of Survey (2 plans + PDF)
Archaeological Assessment Report (4 plans + PDF)
Planning Rationale, including details of requested rezoning, clay soil type and requested front yard and corner side yard setbacks for accommodation of trees. (2 reports + PDF)
Public Consultation Strategy (may be included as part of the Planning Rationale)
Servicing Plan (3 plans + PDF)
Grading and Drainage Plan (2 plans + PDF)
Erosion and Sediment Control Plan (2 plans + PDF)
Engineering Details and Cross sections (2 plans + PDF)
Grade Control and Drainage Plan (2 plans + PDF)
Erosion and Sediment Control Plan (2 plans + PDF)
Functional Servicing Report (2 reports + PDF)
Preliminary Typical Block/Lot Plan (2 plans + PDF)
Geotechnical Report with Slope Stability and Hydrogeotechnical Components (4 reports + PDF)
TIA (4 reports + PDF)
Tree Conservation Report (3 reports + PDF)
Phase 1 ESA (4 reports + PDF)
Phase 2 ESA (4 reports + PDF)
Landfill Buffer Impact Study (4 reports + PDF)
Erosion and Sediment Control Plan (2 plans + PDF)
EIS (4 reports + PDF)

Environmental Unit Comments (Sami Rehman):

The subject property is within the adjacency distance to Mer Bleue Bog, a Provincially Significant Wetland, and any development application requires a full Environmental Impact Statement (EIS), as per OP policies (Sections 2.4.2, 3.2.1, and 4.7.8). Our mapping also identifies unevaluated wetlands and a watercourse on the subject property. The EIS should cover the following items on the subject property and vicinity:

- proximity to Mer Bleue Bog, verify boundaries of current PSW and mitigating impacts on the PSW
- unevaluated wetlands on the subject property
- potential significant habitat for threatened or endangered species (OP Section 4.7.4)
- potential significant wildlife habitat (OP Section 2.4.2)
- determine the appropriate setbacks to the watercourse (OP Section 4.7.3)
- potential significant woodlands

Aerial photos identify trees on the subject property. For the plan of subdivision application, a Tree Conservation Report will be required, which can be combined with the EIS (for the subdivision application) to avoid duplications.

As well, Schedule K of the OP identifies unstable slopes traversing the property.

The applicant should also consult with the local Conservation Authority to determine if any permits or approvals are required under their regulations.

Given the proposed development's proximity to the watercourse, a permit from the Dept. of Fisheries and Oceans maybe required under the updated Fisheries Act. The applicant should consult with the DFO website to conduct an evaluation if a DFO review is required and follow DFO's process.

Transportation & Noise Comments (Josiane Gervais):

1. Follow Traffic Impact Assessment Guidelines
 - Traffic Impact Assessment will be required.
 - Start this process asap.
 - The application will not be deemed complete until the submission of the draft step 1-4, including the functional draft RMA package (if applicable), draft functional plans (if applicable) and/or monitoring report (if applicable).
 - Request base mapping asap if RMA is required. Contact Engineering Services (<https://ottawa.ca/en/city-hall/planning-and-development/engineering-services>)
2. Geometric Road Design (GRD) drawings will be required with the first submission of underground infrastructure and grading drawings. These drawings should include such items as, but are not limited to:
 - Road signage and pavement markings;
 - Location of depressed curbs and tactile walking surface indicators (TWSI);
 - Intersection control measures at new internal intersections; and
 - Traffic calming measures aimed at reducing vehicle speed and enhancing pedestrian safety. Measures may include either vertical or horizontal features, however such measures shall not interfere with stormwater management and overland flow routing. Traffic calming measures shall reference best management practices from the Canadian Guide to Neighbourhood Traffic Calming, published by the Transportation Association of Canada, and/or Ontario Traffic Manual, and/or the City of Ottawa's Traffic Calming Design Guidelines.
3. ROW protection on Navan Rd between Greenbelt boundary and urban area limit is 37.5m even.
4. Corner triangles as per OP Annex 1 - Road Classification and Rights-of-Way at the following locations on the final plan will be required:
 - Local Road to Local Road: 3 m x 3 m
 - Local Road to Collector Road: 5 m x 5 m

- Collector Road to Collector Road: 5 m x 5 m
 - Collector Road to Arterial Road: 5 m x 5 m
5. Ensure to pair driveways where possible.
6. Noise Impact Studies are required. Feasibility Study required before draft approval and Detailed Study required before registration. Both studies must assess:
- Road
 - Rail
 - Stationary due to the proximity to the waste disposal site.

Note that the Feasibility Study is not required at the time of application, but is required before draft approval. However, it is highly recommended to submit the Noise Feasibility Study as soon as possible so that noise effects can be avoided or mitigated as part of the subdivision design.

The above notes relate to the subdivision application.

If the applicant is going for a re-zoning application only at this time, then only the TIA and Noise Feasibility Studies are required.

Design Comments (Melanie Knight):

- Overall, I don't have any concerns with the proposed layout of streets and blocks/lots.
- A greater mix of singles and towns is preferred – with more singles provided especially the southern quadrant of the site.
- The existing (previously approved subdivision) has pedestrian walkways to the open space network to the south. These walkways are spaced no more than 325 metres apart. An additional walkway connection to the open space corridor should be included in the southeast area of the development. It is also preferred to have another connection lined up with Beaufield Street (close to where the concept plan currently proposes a connection) to maintain the minimum 325 metre spacing from the existing connection to the west.

Engineering Comments (Mike Thivierge):

Key Considerations:

- An update to the MSS is not required where a buffer study has been completed for the additional land.
- Consultant should identify the capacity of Pond 2 and all other infrastructure within the design brief. A pond expansion is not expected and stormwater should be managed accordingly.
- An ECA amendment will be required for Pond 2 with the addition for serviceable lands and water quality.
- Low Impact Developments (Infiltration and/or Filtration) is a preferred method to stormwater management. The Consultant is encouraged to consider LID components in their design. The Design brief should discuss the available options and proposed features from a stormwater management perspective. Note that High Ground Water or tight soils have applicable LID designs.

OC Transpo Comments (Julien Lacroix):

OC Transpo doesn't have any submission requirements, but we do have information we would like to share with the applicant at this stage:

1. Please ensure that the extension of Joshua Street is built as a transit-supportive street as per TAC standards. Although details of a long term transit service plan are still being worked out, it is likely transit would run along Joshua Street if/when it is extended to Navan Road. A previous phase of Spring Valley will see the installation of bus stops at the intersection of Joshua and Knotridge, meaning bus stops will not be required for this latest extension east of Knotridge.

2. The applicant indicated in the pre-application meeting that phasing for this development is yet to be confirmed. Depending on the phasing of this proposed development, OC Transpo may look to implement an Early Service Agreement. Early Service is provided in new residential and employment areas in advance of the time when ridership would be high enough to meet the financial performance standard. Normally, the cost to provide a basic peak-period service is paid by the developer of the areas until the number of units occupied is at a level when ridership would normally be high enough to meet the minimum financial performance standard. Staff enter into agreements with developers for this funding as part of the development approval process. Further analysis will be required once details regarding possible phasing of this development become available.

Planning Forester TCR requirements (Mark Richardson R.P.F.):

1. a Tree Conservation Report (TCR) must be supplied for review along with the suite of other plans/reports required by the City; an approved TCR is a requirement of Site Plan or Plan of Subdivision approval
2. any removal of privately-owned trees 10cm or larger in diameter requires a tree permit issued under the Urban Tree Conservation Bylaw; the permit is based on the approved TCR
3. any removal of City-owned trees will require the permission of Forestry Services who will also review the submitted TCR
4. for this site, the TCR may be combined with the EIS provided all information is clearly displayed
 - a. if possible, please submit separate plans showing 1) existing tree inventory, and 2) a plan showing to be retained and to be removed trees with tree protection details
5. the TCR must list all trees on site by species, diameter and health condition – separate stands of trees may be combined using averages
6. the TCR must address all trees with a critical root zone that extends into the developable area – all trees that could be impacted by the construction that are outside the developable area need to be addressed.
7. trees with a trunk that crosses/touches a property line are considered co-owned by both property owners; permission from the adjoining property owner must be obtained prior to the removal of co-owned trees
8. If trees are to be removed, the TCR must clearly show where they are, and document the reason they can not be retained – please provide a plan showing retained and removed treed areas
9. All retained trees must be shown and all retained trees within the area impacted by the development process must be protected as per City guidelines listed on Ottawa.ca
10. the City encourages the retention of healthy trees; if possible, please seek opportunities for retention of trees that will contribute to the design/function of the site.
11. Please ensure newly planted trees have an adequate soil volume for their size at maturity
12. For more information on the process or help with tree retention options, contact Mark Richardson mark.richardson@ottawa.ca

Please refer to the links to “Guide to preparing studies and plans” and fees for further information. Additional information is available related to building permits, development charges, and the Accessibility Design Standards. Be aware that other fees and permits may be required, outside of the development review process. You may obtain background drawings by contacting informationcentre@ottawa.ca.

NOTE: Plans are to be submitted on standard A1 size (594mm x 841mm) sheets, utilizing an appropriate Metric scale (1:200, 1:250, 1:300, 1:400, or 1:500).

With all submitted hard copies provide individual PDF (FLATTENED) of the DWGs and for reports please provide one PDF file of the reports.

These pre-con comments are valid for one year. If you submit a development application(s) after this time, you may be required to meet for another pre-consultation meeting and/or the submission requirements may change. You are as well encouraged to contact us for a follow-up meeting if the plan/concept will be further refined.

Please do not hesitate to contact me if you have any questions or concerns.

Sincerely,

Shoma Murshid, MCIP, RPP
File Lead, Planner II

Responsable de dossier, urbaniste II

City of Ottawa/ Ville d'Ottawa

Development Review (Suburban Services, East)/ Examen des projets d'aménagement (Services suburbains Est)

Planning, Infrastructure, and Economic Development Department/ Service de la planification, de l'infrastructure et du développement économique

110 Laurier Avenue West, 4th Floor, Ottawa ON K1P 1J1/ 110, avenue Laurier Ouest, 4^e étage, Ottawa (Ontario) K1P 1J1

Mail Code/ Code de courrier : 01-14

Tel/ Tél: (613) 580-2424 ext. 15430

Fax/ Téléc. : (613) 580-4751

e-mail/ courriel : shoma.murshid@ottawa.ca

www.ottawa.ca

This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.

5 attachments



lifting_30cm_reserves_en.pdf

1017K



zoning_amendment_en.pdf

1394K



subdivision_en.pdf

1756K



Concept Plan.pdf

95K




20313-19 Claridge Pt Lts 4 5 C4 OF GL SK D1-SK 24X48 (1).pdf

466K

Appendix B

Drawing 39617-100 General Plan

Figure 2.1 – Conceptual Water

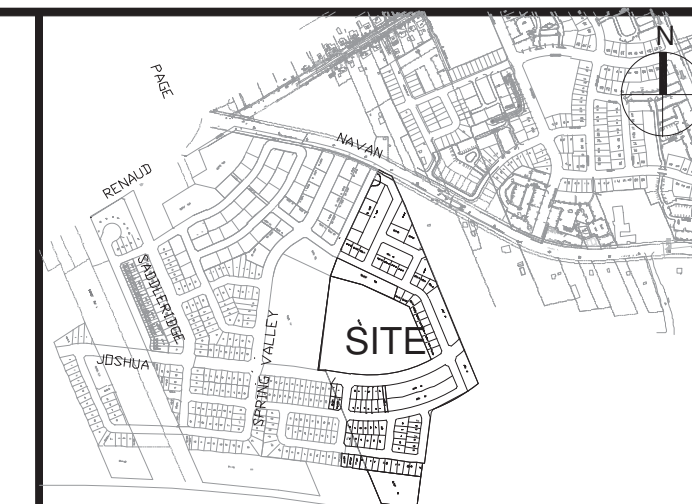


	SEE 010, 011, 012 FOR NOTES, LEGEND, CB TABLE, STREET SECTIONS AND DETAILS		
14			
13			
12			
11			
10	REVISED FIRE HYDRANT BLOCK 29	DGY	19:10:2
9	REVISED SERVICES PER NEW HYDRO LAYOUT	DGY	18:03:1
8	ISSUED FOR CONSTRUCTION	DGY	18:01:1
7	ISSUED FOR MYLAR	DGY	18:01:1
6	ISSUED FOR TENDER	DGY	17:11:3
5	ISSUED FOR MOE	DGY	17:11:1
4	REVISED PER LEGAL PLAN	DGY	17:10:1
3	REVISED PER CITY COMMENTS	DGY	17:08:0
2	REVISED PER CITY COMMENTS	DGY	17:05:0
1	ISSUED FOR APPROVAL	DGY	16:10:2
No.	REVISIONS	By	Date

IBI GROUP
400 – 333 Preston Street
Ottawa ON K1S 5N4 Canada
tel 613 225 1311 fax 613 225 9868
ibigroup.com



The image shows a circular professional engineer's seal for the Province of Ontario. The outer ring contains the text "LICENSED PROFESSIONAL ENGINEER" at the top and "PROVINCE OF ONTARIO" at the bottom. Inside the ring, the name "D.D. Yannouloupoulos" is written. A stylized signature is superimposed over the name. Below the name, the date "2018/06/xx" is stamped. To the right of the seal is a north arrow, which is a circle divided into four quadrants by a cross. The letter "N" is positioned above the circle, and a thick black line indicates the direction of North, pointing towards the upper-left quadrant.

Scale		1:1000	
Design R.M.		Date MARCH 2016	
Drawn E.H.		Checked D.G.Y.	
Project No. 39617		Drawing No. 100	

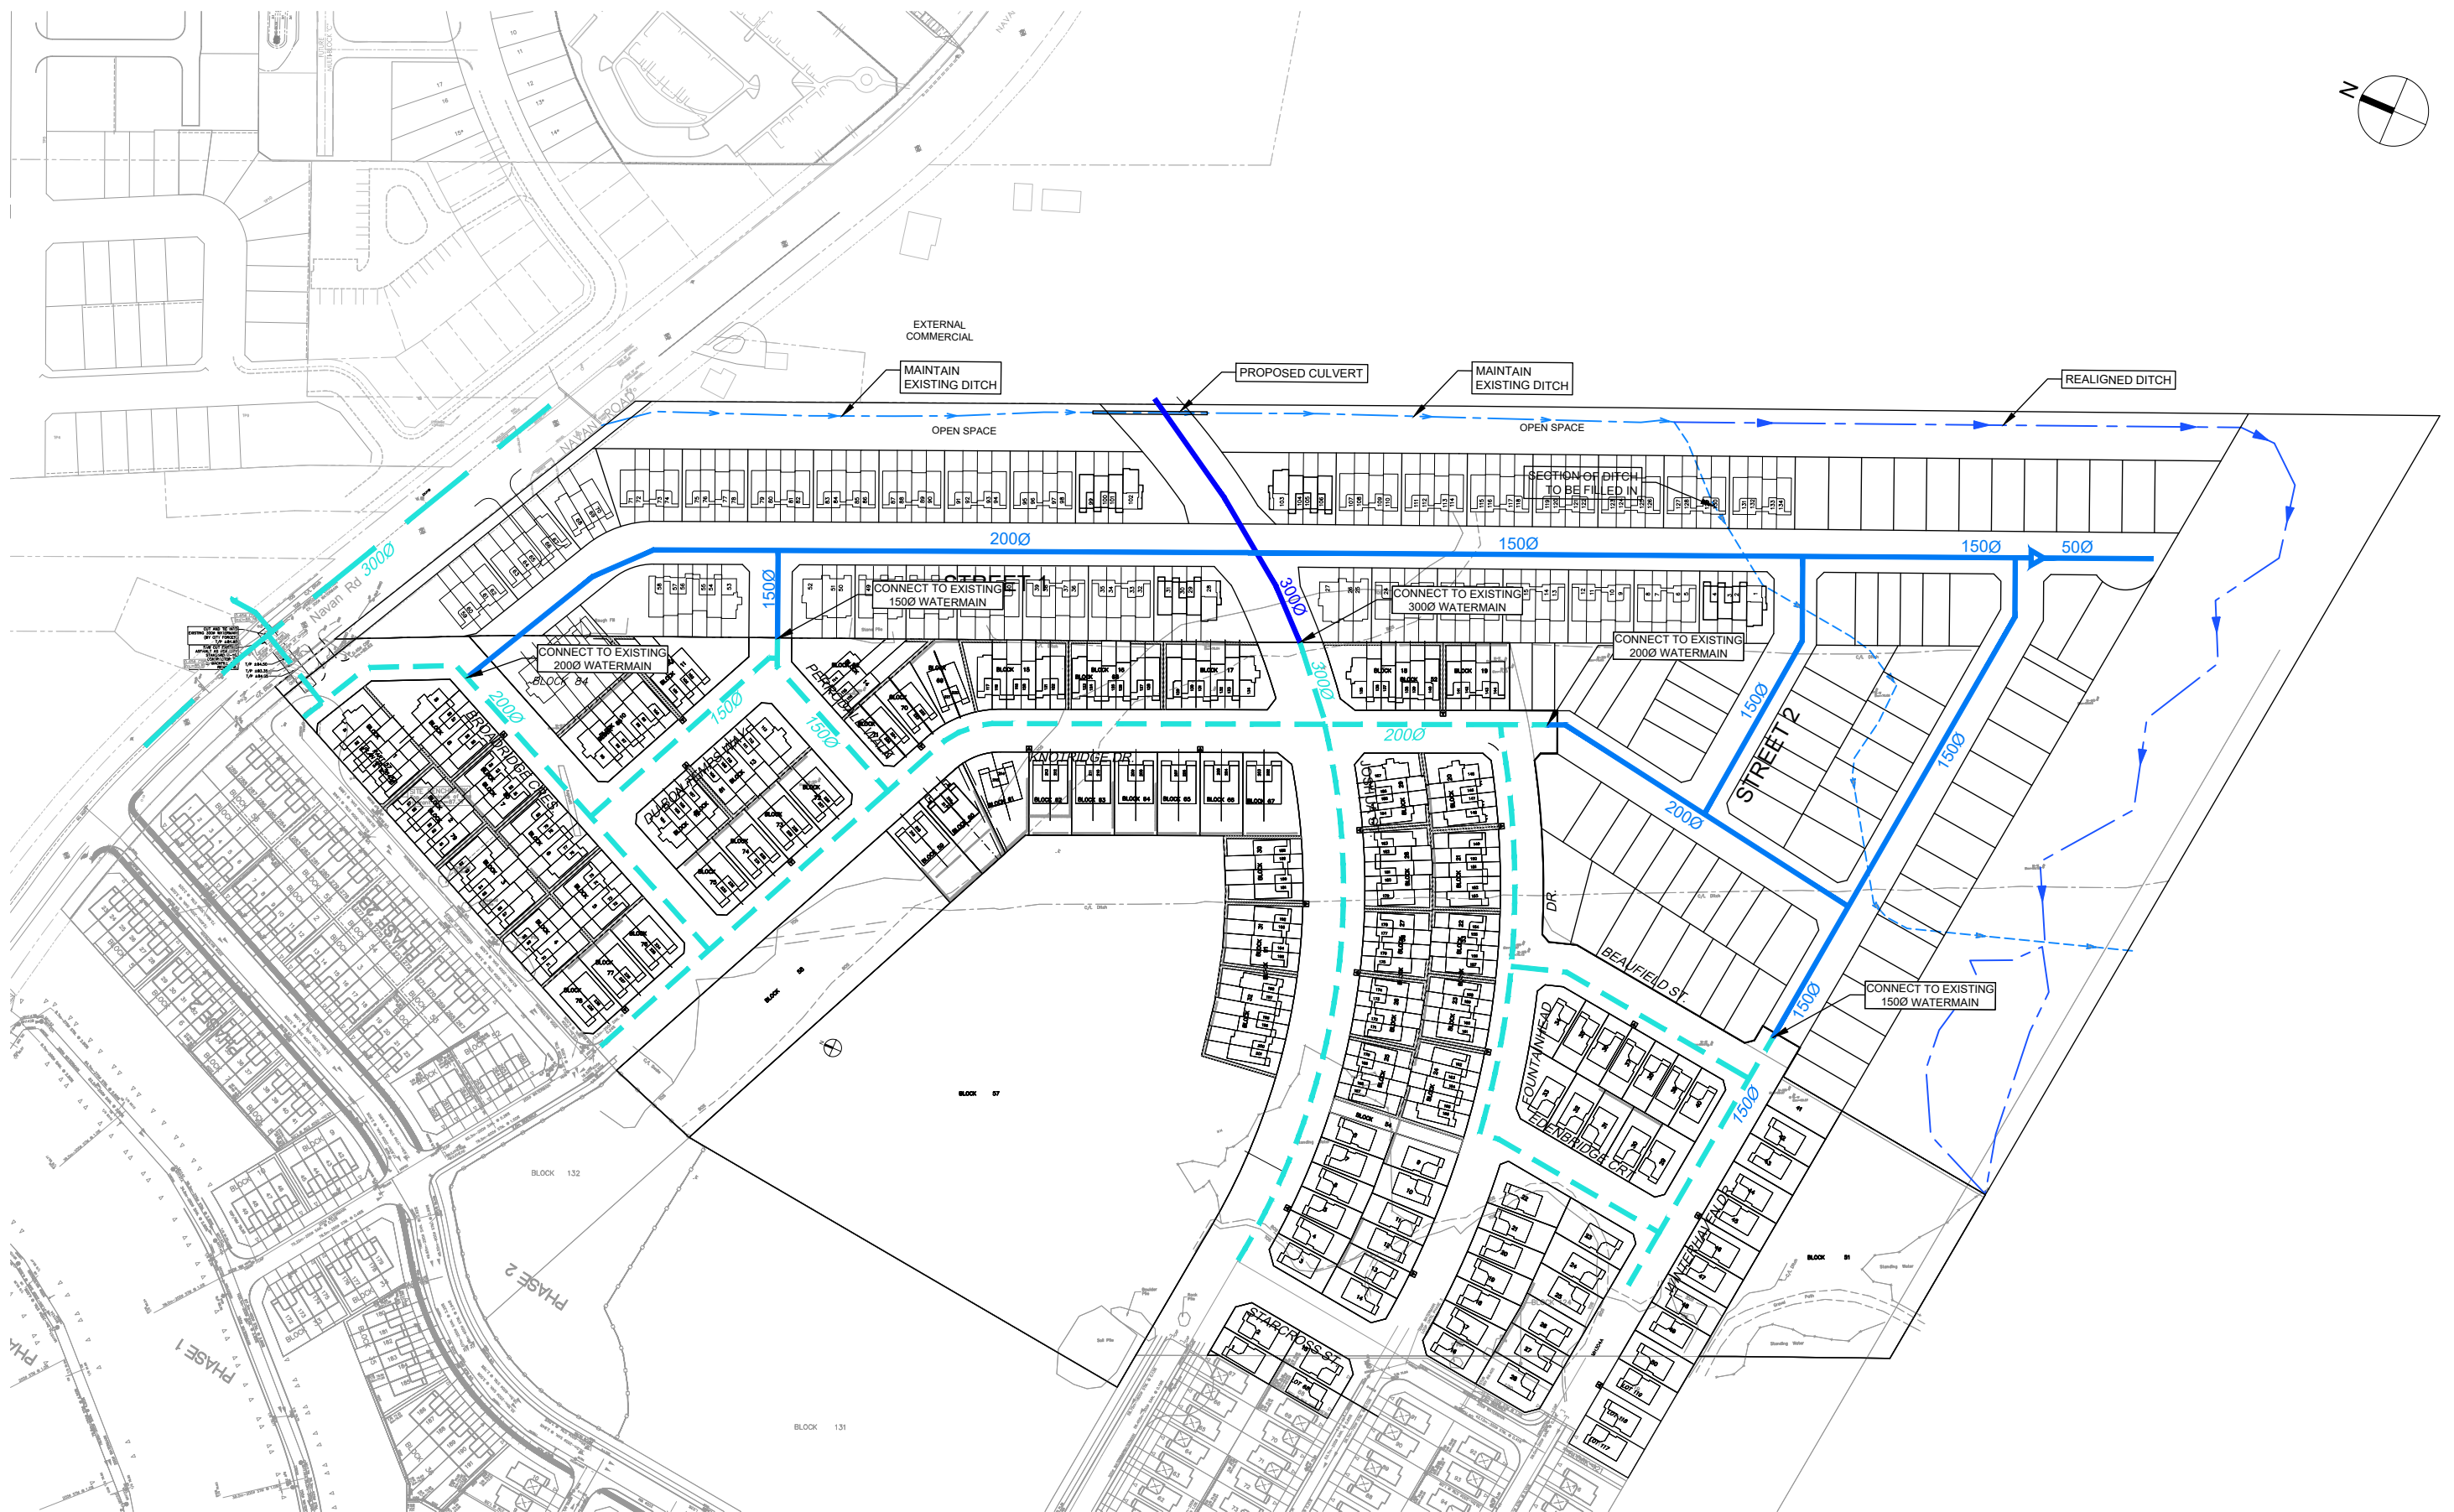

Appendix C

EUC Drainage Area Markup

EUC & Actual Flow Comparison


Figure 3.1 – Conceptual Sanitary Sewer Plan

Figure 3.2 – Conceptual Sanitary Drainage Areas

Updated Phase 3 Sanitary Sewer Design Sheets



- 120 SANITARY SEWER AND MANHOLE
- 12 SANITARY TRUNK SEWER AND MANHOLE
- SANITARY FORCEMAIN
- SANITARY CATCHMENT AREA
- 71.50 ORIGINAL GROUND OBVERT
- 3.25 AREA (ha)
- 56 POPULATION
- 2 MANHOLE No.
- 3.25 AREA (ha)
- 56 POPULATION
- 2 MANHOLE No.
- 3.2 INST (INDUSTRIAL) ha
- 3.2 INST (COMMERCIAL) ha
- * EQUIVALENT AREA (17.7 l/s ALLOWABLE PEAK FLOW UNDER C of O SEWER USE AGREEMENT)

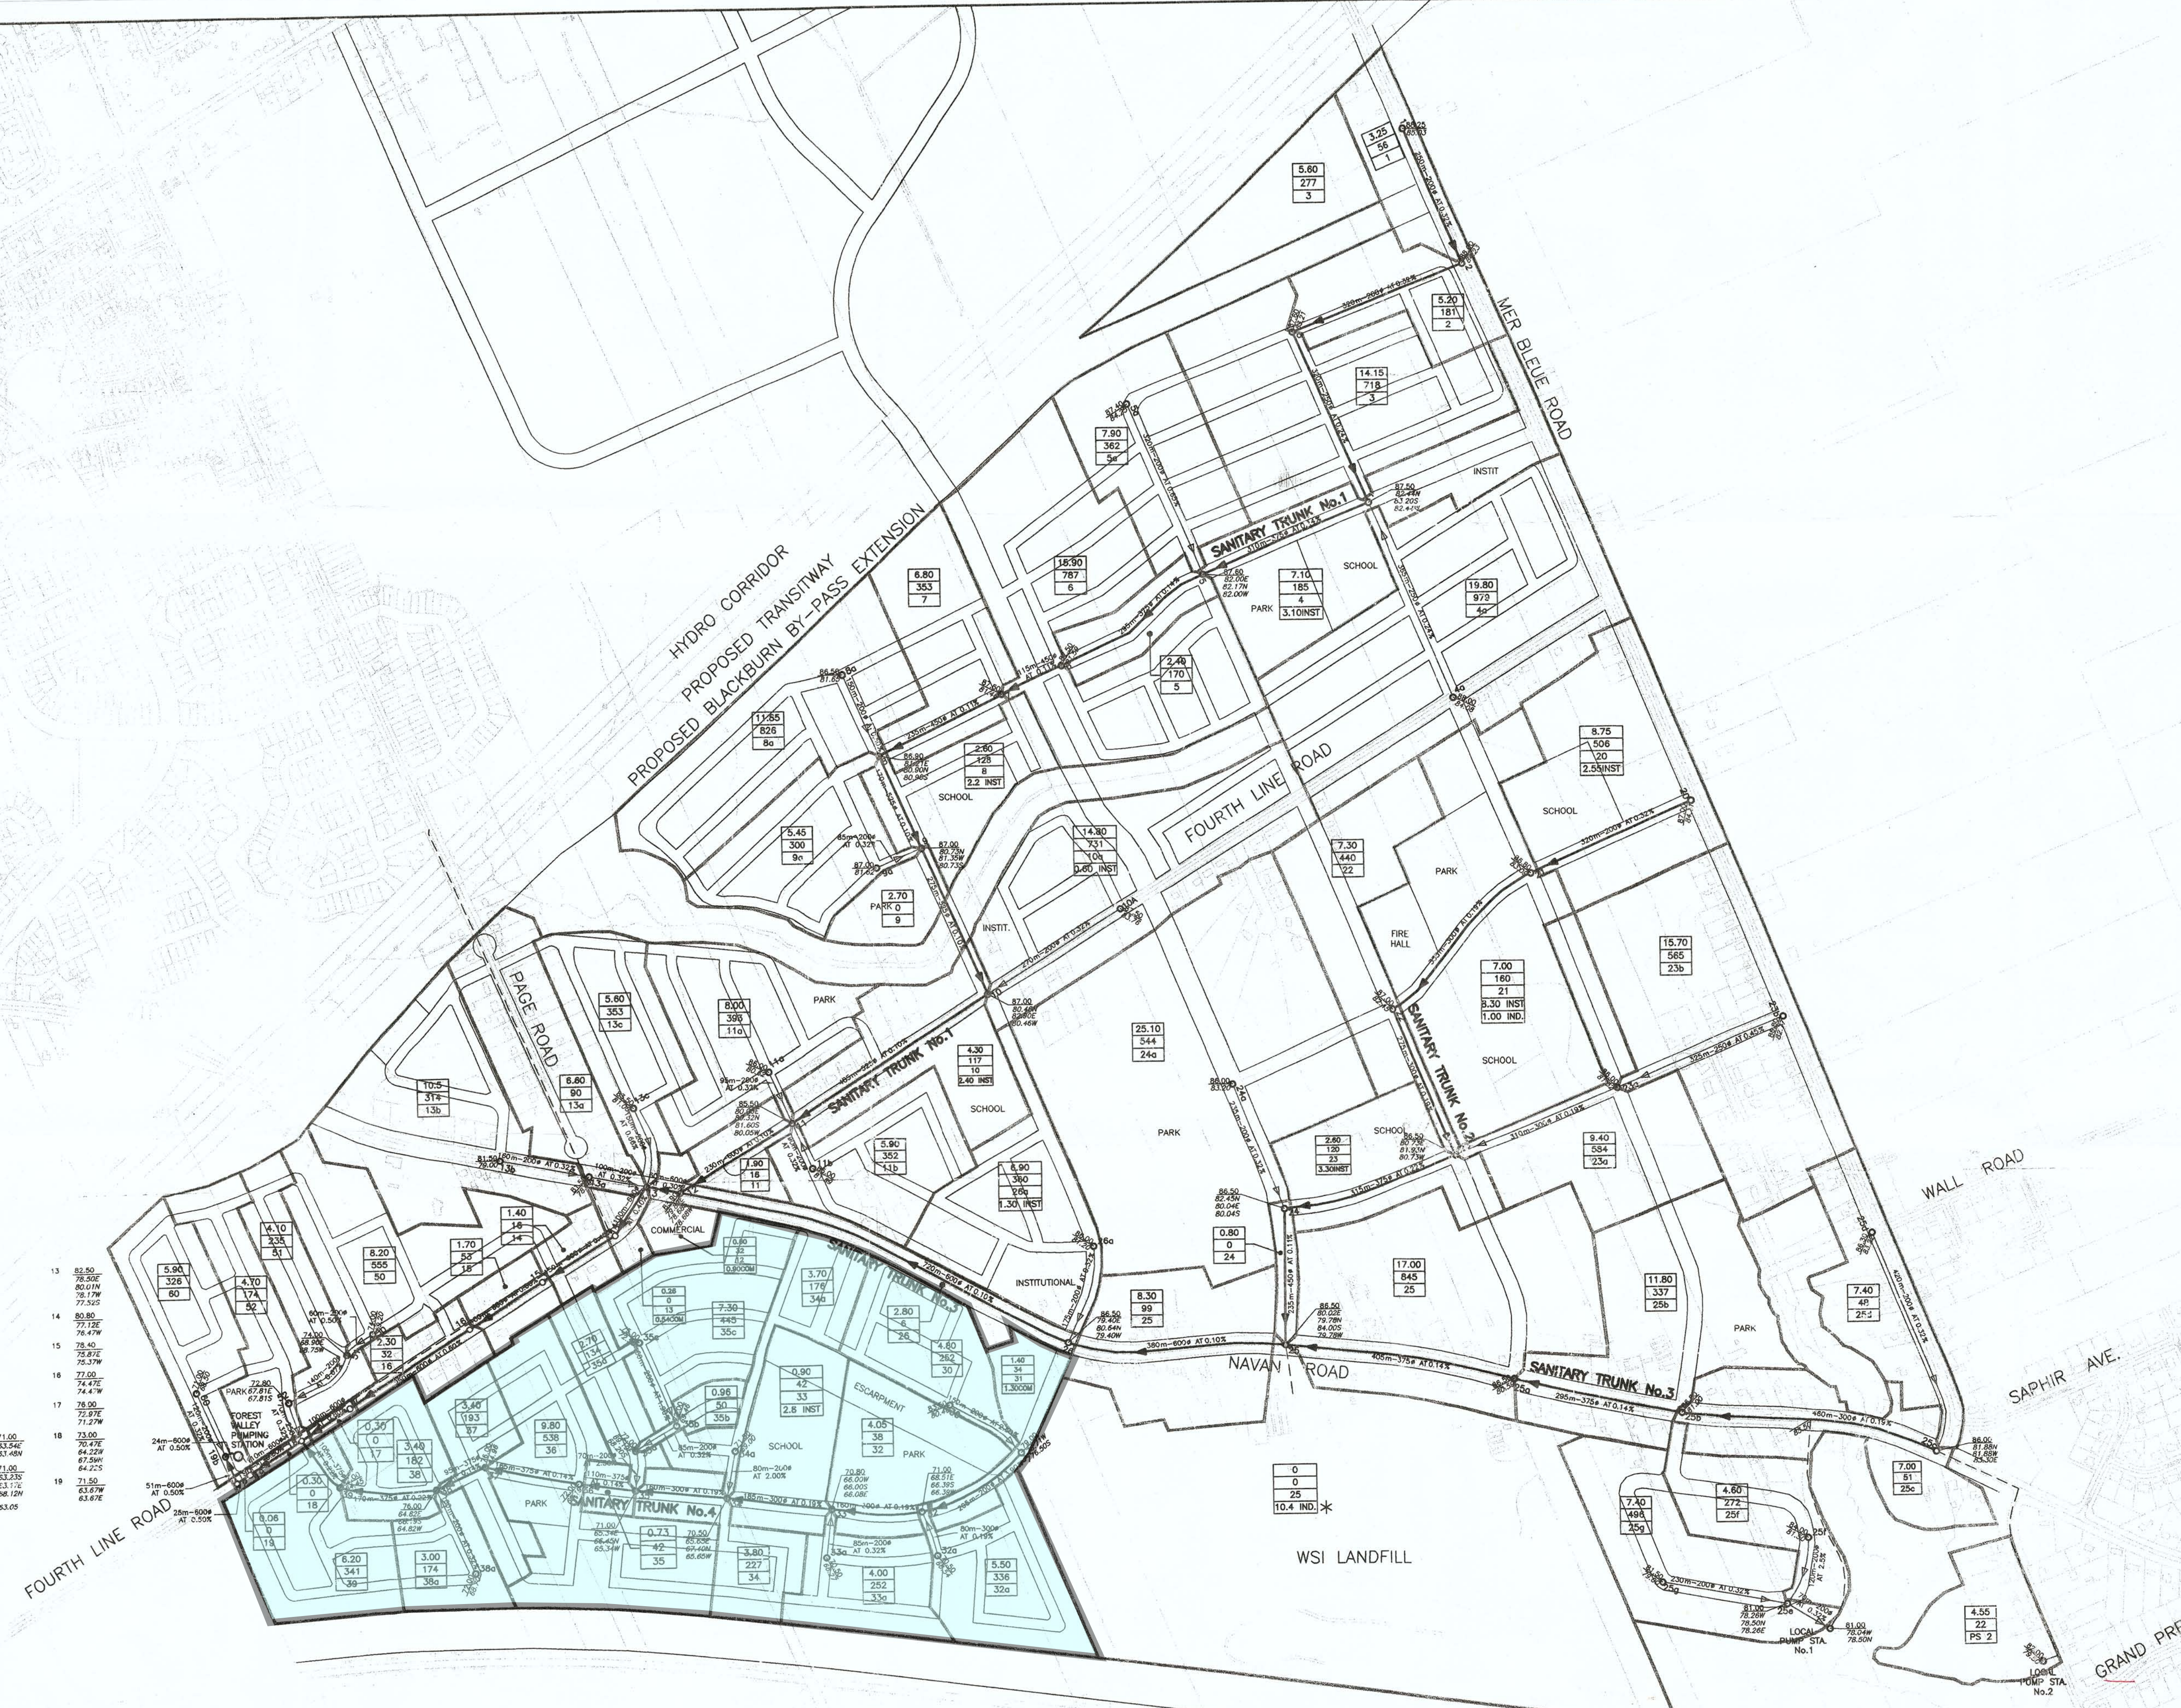

13 82.50
78.50
80.01N
76.17W
77.52S
80.80
77.12E
75.87W
75.57W
14 78.40
75.87E
75.57W
15 72.00
74.47E
74.47W
16 78.00
72.97E
71.27W
17 73.00
70.47E
64.22W
67.59W
64.22S
18 71.00
63.23S
63.17E
66.12W
19 71.50
63.67W
63.67E
P.V.P.S. 63.05

ABANDONED C.P.R. RIGHT OF WAY

REVISION No.2 MARCH, 2005

CITY OF OTTAWA
GLOUCESTER EUC INFRASTRUCTURE
SERVICING STUDY UPDATE

SANITARY SEWER SYSTEM

Scale 0 40 120 200m

Dep. No. 2

Site 04.10.29

Revision 2

SAN



ARCADIS PROFESSIONAL SERVICES (CANADA) INC.
500-333 Preston Street
Ottawa, Ontario K1S 5N4 Canada
arcadis.com


Comparison EUC vs Actual (using EUC Densities)

SANITARY SEWER DESIGN SHEET



Spring Valley Trails Phase 5/6 - ECU Review
CITY OF OTTAWA
Claridge Homes

LOCATION				RESIDENTIAL										ICI AREAS								INFILTRATION ALLOWANCE			FIXED FLOW (L/s)		TOTAL FLOW	PROPOSED SEWER DESIGN						
STREET	AREA ID	FROM MH	TO MH	AREA w/ Units (Ha)	SF	SD	TH	APT	AREA w/o Units (Ha)	IND	CUM	PEAK FACTOR	PEAK FLOW (L/s)	INSTITUTIONAL		AREA (Ha) COMMERCIAL		INDUSTRIAL		PEAK FLOW (L/s)	AREA (Ha)		FLOW (L/s)	IND	CUM	CAPACITY (L/s)	LENGTH (m)	DIA (mm)	SLOPE (%)	VELOCITY (m/s)	AVAILABLE CAPACITY L/s (%)			
														IND	CUM	IND	CUM	IND	CUM		IND	CUM		IND	CUM									
Original ECU Report		39	18						65.64	3457.0	3457.0	3.39	47.46	2.83	2.83	1.30	1.30	0.00	0.00	3.59	69.77	69.77	19.54			70.59	85.79	105.00	375	0.22	0.753	15.21	17.73%	
Original MSS Design Parameters:				Notes: 1. Mannings coefficient (n) = 0.013 2. Demand (per capita): 350 L/day 3. Infiltration allowance: 0.28 L/s/ha 4. Residential Peaking Factor: Harmon Formula = 1+(14/(4+P^0.5)) where P = population in thousands										Designed: CM		No. 1		Revision Spring Valley Phase 5/6							Date 2020-02-05									
Residential ICI Areas														Checked: DY																				
SF	3.2	p/p/lu																																
TH/SD	2.4	p/p/lu	INST	50,000	L/ha/day				Peak Factor																									
APT	1.8	p/p/lu	COM	50,000	L/ha/day				1.5																									
Other	95	p/p/ha	IND	35,000	L/ha/day				MOE Chart																									
				17000	L/ha/day																													
														Dwg. Reference: EUC SAN		File Reference: 39617.5.7.1		Date: 2017-04-05							Sheet No: 1 of 1									

LOCATION				RESIDENTIAL										ICI AREAS								INFILTRATION ALLOWANCE			FIXED FLOW (L/s)		TOTAL FLOW	PROPOSED SEWER DESIGN									
STREET	AREA ID	FROM MH	TO MH	AREA w/ Units (Ha)	SF	SD	TH	APT	AREA w/o Units (Ha)	POPULATION IND	CUM	PEAK FACTOR	PEAK FLOW (L/s)	INSTITUTIONAL IND	CUM	COMMERCIAL IND	CUM	INDUSTRIAL IND	CUM	PEAK FLOW (L/s)	AREA (Ha) IND	CUM	FLOW (L/s)	IND	CUM	(L/s)	IND	CUM	(L/s)	CAPACITY (L/s)	LENGTH (m)	DIA (mm)	SLOPE (%)	VELOCITY (ft/s)	AVAILABLE CAPACITY L/s (%)		
Spring Valley Ph 5/6 Adequacy of Services Report																																					
Actual Values		39	18	65.64	582	88	683	48	0.00	4146.9	4146.9	3.32	44.61	2.83	2.83	1.31	1.31	0.00	0.00	1.34	69.78	69.78	23.03							68.98	85.79	105.00	375	0.22	0.753	16.82	19.60%
Actual Values		18	19	0.00					0.00	0.0	18385.9	2.69	200.29	0.00	26.58	0.00	2.74	0.00	11.40	32.38	0.00	452.59	126.73							359.40	452.94	110.00	600	0.50	1.552	93.55	20.65%
Actual Values		19	19a	0.00					0.00	0.0	18385.9	2.69	200.29	0.00	26.58	0.00	2.74	0.00	11.40	44.62	0.00	452.59	126.73							371.63	452.94	110.00	600	0.50	1.552	81.31	17.95%
Actual Values		19a	19b	0.40					0.00	0.0	18385.9	2.69	200.29	0.00	26.58	0.00	2.74	0.00	11.40	44.62	0.40	452.99	126.84							371.75	452.94	110.00	600	0.50	1.552	81.20	17.93%
Actual Values		19b	FVPS	0.00					0.00	0.0	18711.9	2.68	203.26	0.00	26.58	0.00	2.74	0.00	11.40	44.62	0.00	458.89	128.49							376.37	452.94	110.00	600	0.50	1.552	76.58	16.91%
2020 Design Parameters:				Notes: 1. Mannings coefficient (n) = 0.013 2. Demand (per capita): 280 L/day 3. Infiltration allowance: 0.33 L/s/ha 4. Residential Peaking Factor: Harmon Formula = 1+(14/(4+P^0.5)) where P = population in thousands										Designed: RRR		No. 1		Revision Spring Valley Phase 5/6							Date 2025-12-12												
Residential ICI Areas														Checked: DY																							
SF 3.4 p/plu TH/SD 2.7 p/plu APT 1.8 p/plu Other 95 p/p/ha				INST 28,000 L/ha/day COM 28,000 L/ha/day IND 28,000 L/ha/day										Peak Factor 1 MOE Chart																							
														Dwg. Reference: EUC SAN		File Reference: 39617.5.7.1		Date: 2025-11-21							Sheet No: 1 of 1												

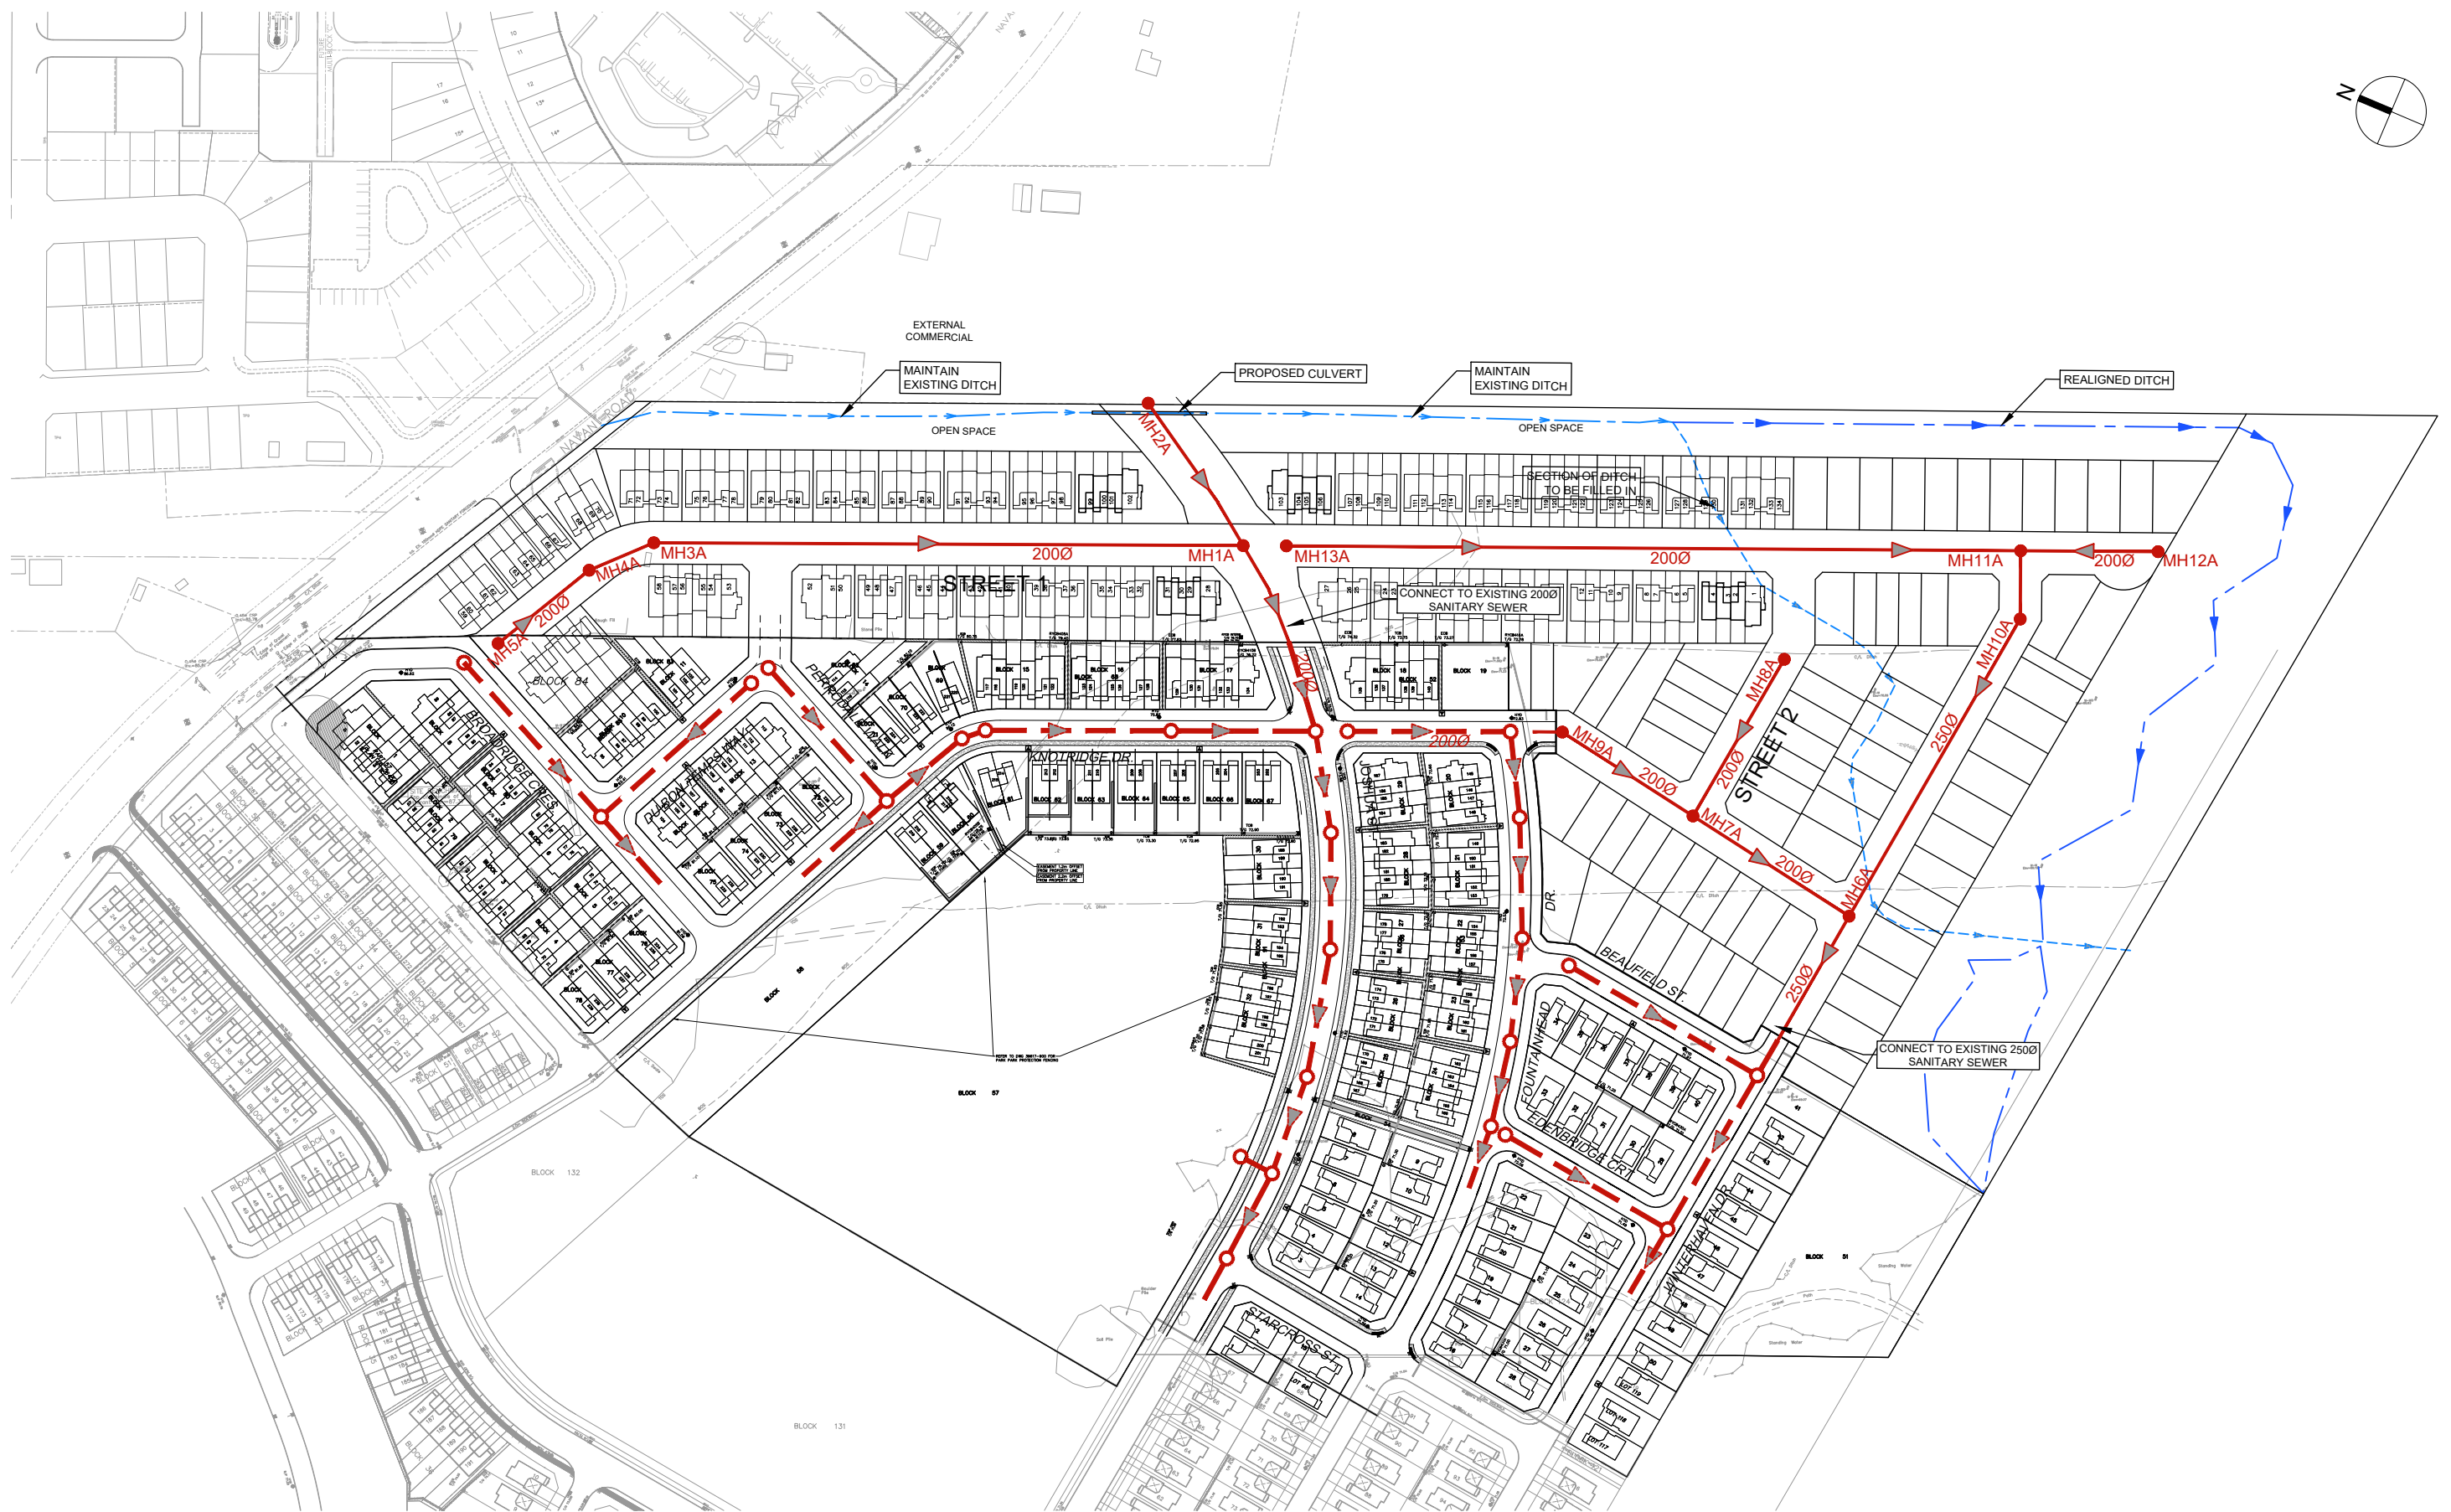

\\13888_SVTPH0646\7.0_Production\7.0_Production\7.0_Design\04_CHALAND\Advisory Report\ShedCn\Figure 3.2 SANITARY DRAINAGE AREAS Plot Scale: 1:2500 Printed At: 12/15/2025 User: Sowed By: rdhew722 User: Sowed At: Nov. 20, 25

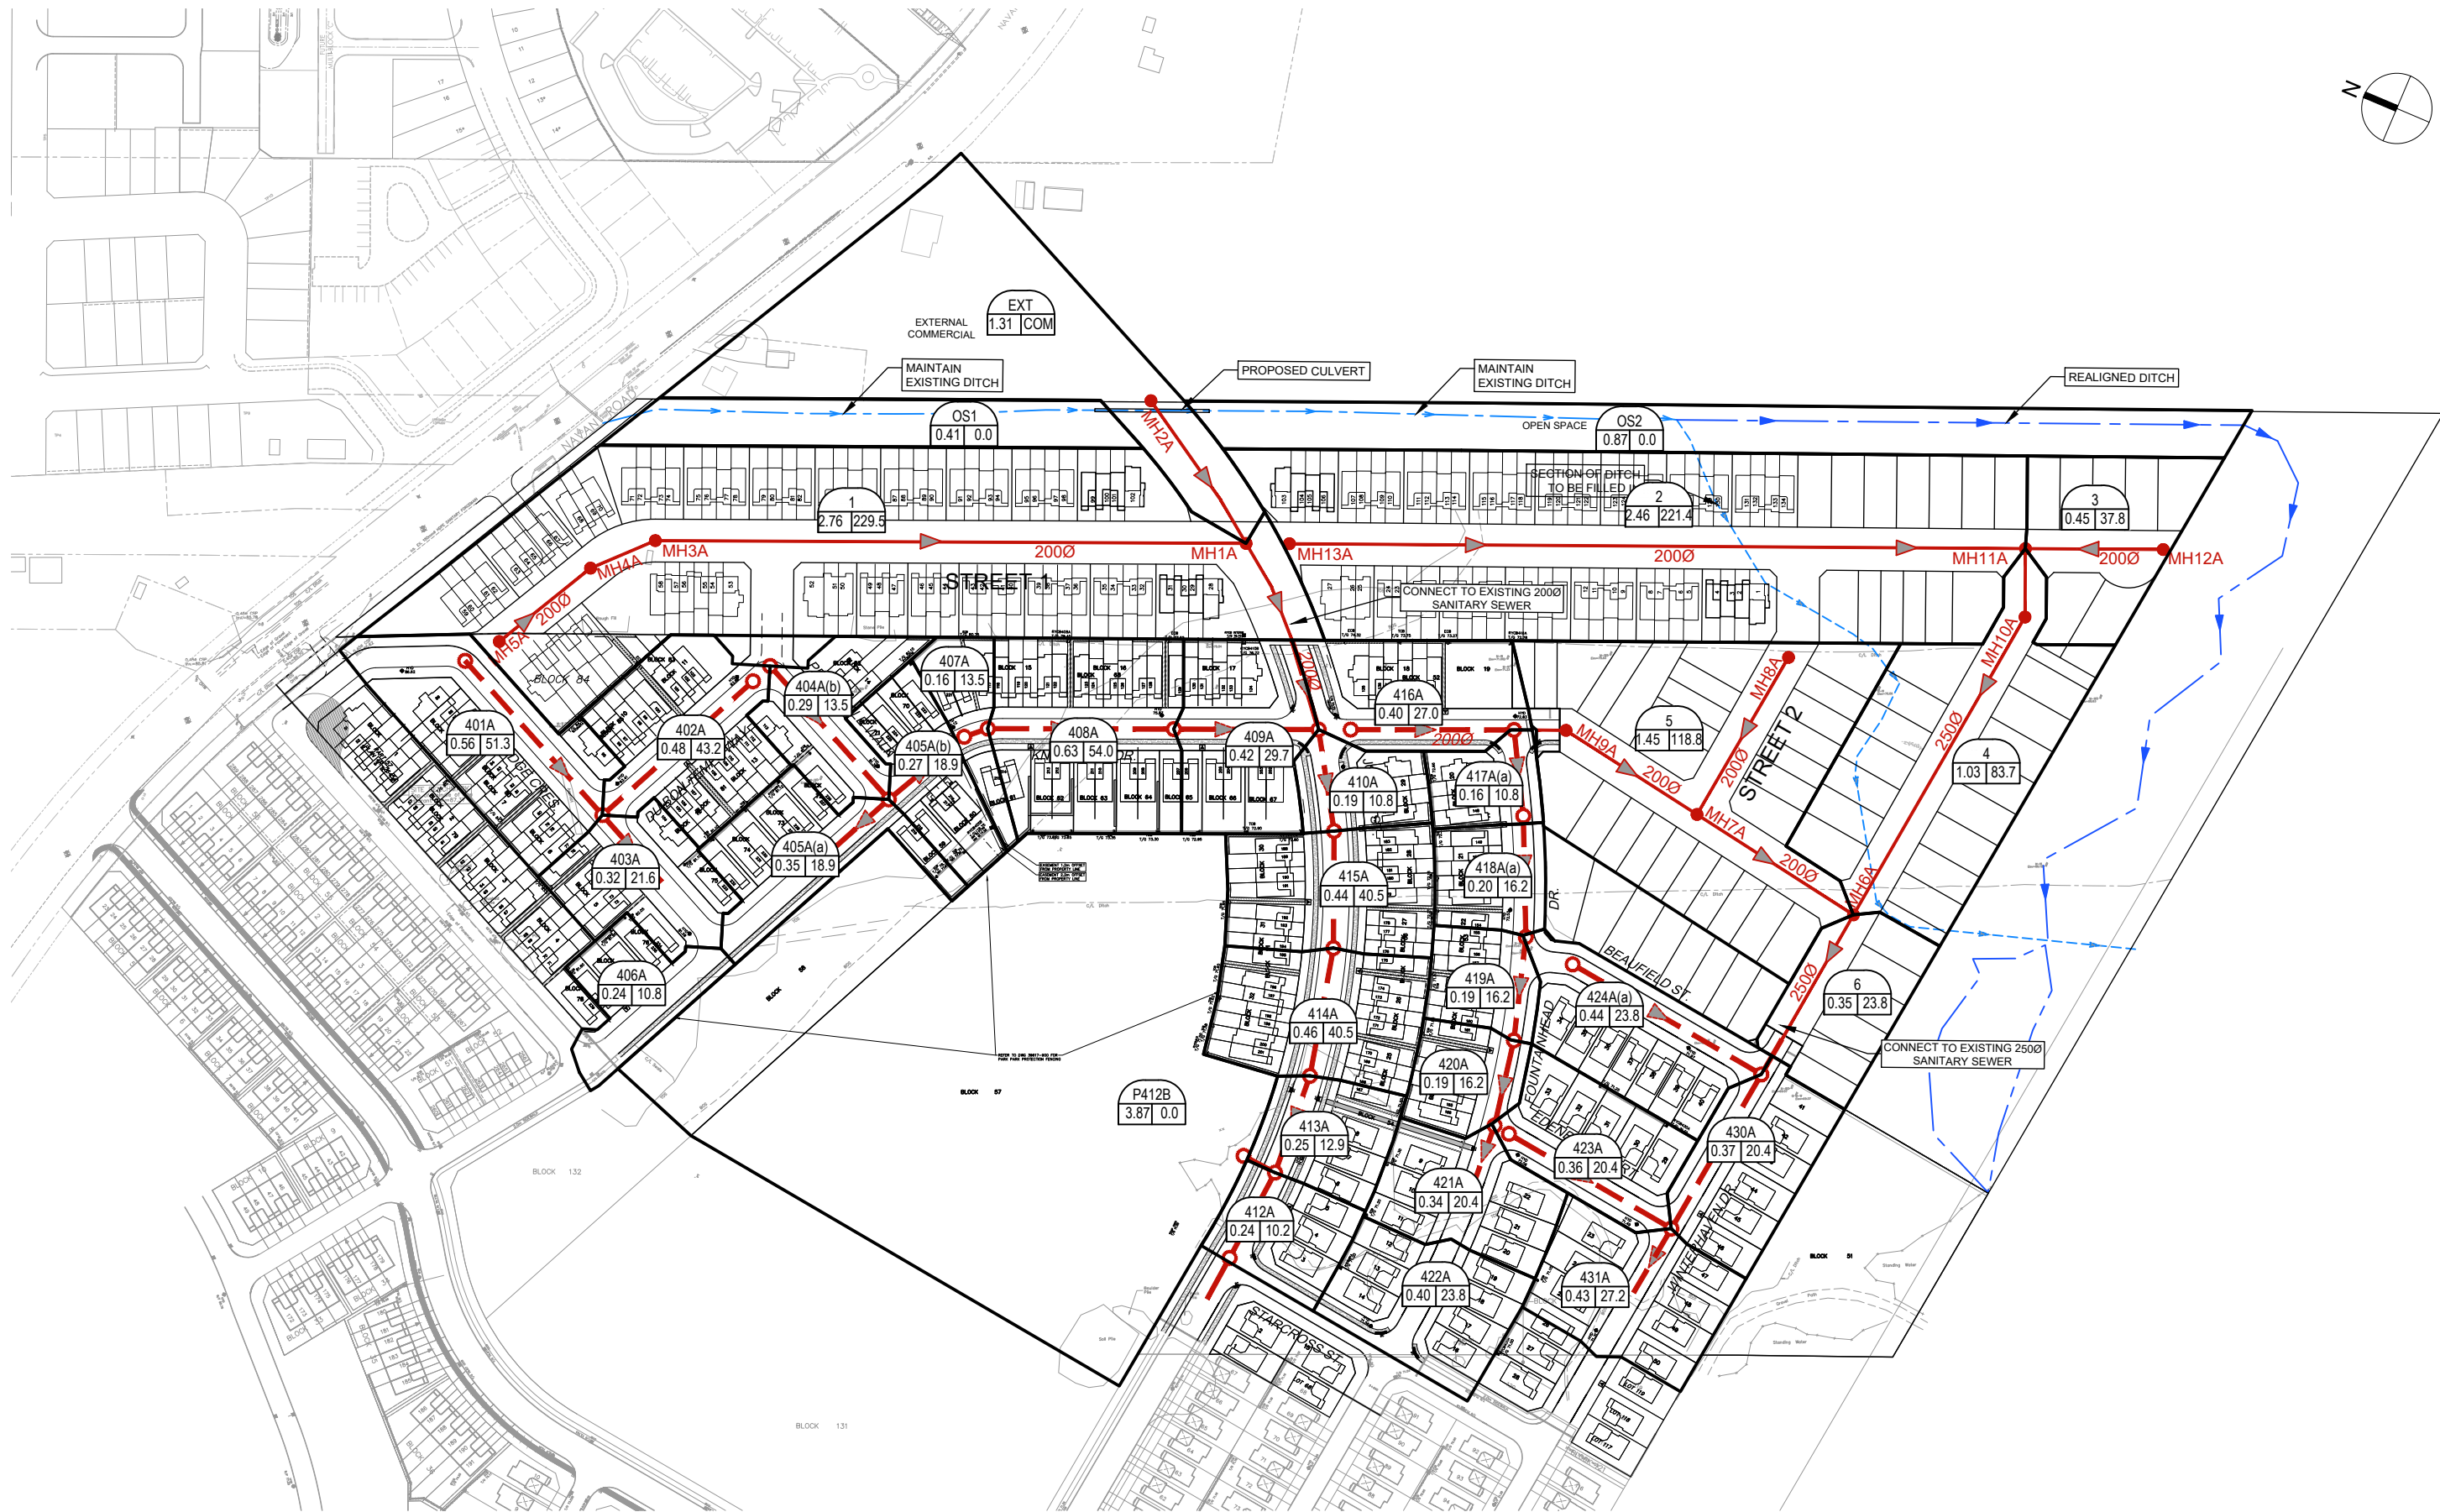

Scale

Project Title

Drawing Title

Sheet No.



NTS

SPRING VALLEY TRAILS
PHASE 5 & 6

CONCEPTUAL SANITARY
DRAINAGE AREAS

Figure 3.2



ARCADIS PROFESSIONAL SERVICES (CANADA) INC.
500-333 Preston Street
Ottawa, Ontario K1S 5N4 Canada
arcadis.com

CONCEPTUAL SANITARY SEWER DESIGN SHEET

Spring Valley Phase 5/6
CITY OF OTTAWA
Claridge Homes

LOCATION				RESIDENTIAL										ICI AREAS										INFILTRATION ALLOWANCE										PROPOSED SEWER DESIGN									
STREET	AREA ID	FROM MH	TO MH	AREA w/ Units (Ha)	UNIT TYPES				AREA w/o Units (Ha)	POPULATION		PEAK FACTOR	PEAK FLOW (L/s)	AREA (Ha)				PEAK FLOW (L/s)	AREA (Ha)		FLOW (L/s)	FIXED FLOW (L/s)	TOTAL FLOW (L/s)	CAPACITY (L/s)	LENGTH (m)	DIA (mm)	SLOPE (%)	VELOCITY (m/s)	AVAILABLE CAPACITY														
					SF	SD	TH	APT		IND	CUM			INSTITUTIONAL	COMMERCIAL	INDUSTRIAL	IND		CUM	L/s									(%)														
Broadridge Crescent	4101A	MH401A	MH403A	0.56			14			37.8	37.8	4.00	0.49					0.00						0.67	58.27	87.50	200	2.90	1.80	57.59	98.84%												
Perrodale Street		402A	MH402A	0.48			16			43.2	43.2	4.00	0.56					0.00						0.72	27.59	84.65	200	0.65	0.85	26.87	97.40%												
Broadridge Crescent		403A	MH403A	0.32		2	6			21.6	102.6	4.00	1.33					0.00						1.78	55.17	75.06	200	2.60	1.70	53.39	96.78%												
Perrodale Street		404A(a), 404A(b)	MH404A	0.29		1	4			13.5	13.5	4.00	0.18					0.00						0.27	60.24	75.06	200	3.10	1.86	59.97	99.55%												
Knottidge Drive		405A(a)	MH405A	0.35		7				18.9	32.4	4.00	0.42					0.00						0.63	27.59	94.30	200	0.65	0.85	26.96	97.71%												
Knottidge Drive		406A	MH406A	Ex. MH325A	0.24		4			10.8	145.8	4.00	1.89					0.00						2.63	19.36	65.83	200	0.32	0.60	16.73	86.42%												
Knottidge Drive - Ph2B			Ex. MH325A	Ex. MH324A						0.0	145.8	4.00	1.89					0.00						2.63	30.39	13.20	250	0.24	0.60	27.76	91.35%												
Broadridge Cres			Ex. MH328A	Ex. MH327A	0.59			20		54.0	54.0	4.00	0.70					0.00						0.89	46.92	92.99	200	1.88	1.45	46.02	98.09%												
Broadridge Cres			Ex. MH327A	Ex. MH326A	0.70		1	24		67.5	121.5	4.00	1.58					0.00						2.00	68.43	93.06	200	4.00	2.11	66.43	97.08%												
Broadridge Cres			Ex. MH326A	Ex. MH324A	0.00					0.0	121.5	4.00	1.58					0.00						2.00	68.43	10.20	200	4.00	2.11	66.43	97.08%												
Knottidge Drive - Ph2B			Ex. MH324A	Ex. MH319A	0.31			7		18.9	286.2	4.00	3.71					0.00						4.98	30.39	82.80	250	0.24	0.60	25.42	83.62%												
Knottidge Drive		405A(b)	MH405A	MH407A	0.27		7			18.9	18.9	4.00	0.25					0.00						0.33	56.22	41.18	200	2.70	1.73	55.89	99.41%												
Knottidge Drive		407A	MH407A	MH408A	0.16		4	1		13.5	32.4	4.00	0.42					0.00						0.56	72.58	10.49	200	4.50	2.24	72.02	99.23%												
Knottidge Drive		408A	MH408A	MH409A	0.63		8	12		54.0	86.4	4.00	1.12					0.00						1.47	72.58	78.19	200	4.50	2.24	71.11	97.98%												
Knottidge Drive		409A	MH409A	MH410A	0.42		6	5		29.7	116.1	4.00	1.51					0.00						1.99	48.39	60.83	200	2.00	1.49	46.40	95.88%												
Joshua Street	EXT	2A	1A	0.41						0.0	0.0	4.00	0.00		1.31	1.31		0.00	0.42	1.72	1.72	0.57	0.00	0.99	76.51	72.00	200	5.00	2.36	75.52	98.70%												
Street 3	1	5A	1A	2.76				81		218.7	218.7	4.00	2.84		0.00	0.00		0.00	0.00	2.76	2.76	0.91	0.00	3.75	34.22	330.00	200	1.00	1.06	30.47	89.05%												
Joshua Street		1A	MH410A							0.0	218.7	4.00	2.84		1.31			0.00	0.42	0.00	4.48	1.48	0.00	4.74	76.51	100.00	200	5.00	2.36	71.77	93.81%												
Joshua Street	410A	MH410A	MH415A	0.19			4			10.8	229.5	4.00	2.98		1.31			0.00	0.42	0.19	4.67	1.54	0.00	4.94	107.45	43.16	250	3.00	2.12	102.51	95.40%												
Joshua Street	415A	MH415A	MH414A	0.44			15			40.5	270.0	4.00	3.50		1.31			0.00	0.42	0.44	5.11	1.69	0.00	5.61	48.06	49.17	250	0.60	0.95	42.44	88.32%												
Joshua Street	414A	MH414A	MH413A	0.46			15			40.5	310.5	4.00	4.03		1.31			0.00	0.42	0.46	5.57	1.84	0.00	6.29	30.39	54.59	250	0.24	0.60	24.11	79.31%												
Joshua Street	413A	MH413A	MH412A	0.25	3		1			12.9	323.4	4.00	4.19		1.31			0.00	0.42	0.25	5.82	1.92	0.00	6.54	30.39	43.24	250	0.24	0.60	23.86	78.49%												
PARK	P412B	MH412B	MH412A	4.31						0.0	0.0	4.00	0.00		0.00			0.00	0.00	4.31	4.31	1.42	5.00	6.42	15.89	18.88	150	1.00	0.87	9.47	59.58%												
Joshua Street	412A	MH412A	MH411A	0.24	3					10.2	333.6	4.00	4.32		1.31			0.00	0.42	0.24	6.06	2.00	5.00	11.75	30.39	42.22	250	0.24	0.60	18.84	61.34%												
Joshua Street		MH411A	Ex. CAP							0.0	333.6	4.00	4.32		1.31			0.00	0.42	0.00	10.37	3.42	5.00	13.17	43.97	37.70	300	0.19	0.60	30.80	70.05%												
Joshua Street - Ph2B		Ex. CAP	Ex. MH307A	0.51	7					23.8	357.4	4.00	4.63		1.31			0.00	0.42	0.51	10.88	3.59	5.00	13.65	43.97	56.41	300	0.19	0.60	30.33	68.96%												
Joshua Street - Ph2B		Ex. MH307A	Ex. MH195A	0.57	9					30.6	388.0	4.00	5.03		1.31			0.00	0.42	0.57	11.45	3.78	5.00	14.23	43.97	111.80	300	0.19	0.60	29.74	67.63%												
Knottidge Drive	416A	MH416A	MH417A	0.40			10			27.0	27.0	4.00	0.35		0.00			0.00	0.00	0.40	0.40	0.13	0.00	0.48	54.10	68.64	200	2.50	1.67	53.62	99.11%												
Fountainhead Drive	417A(a), 417A(b)	MH417A	MH418A	0.24			8			21.6	48.6	4.00	0.63		0.00			0.00	0.00	0.24	0.64	0.21	0.00	0.84	19.36	36.30	200	0.32	0.60	18.51	95.65%												
Fountainhead Drive	418A(a), 418A(b)	MH418A	MH419A	0.30			10			27.0	75.6	4.00	0.98		0.00			0.00	0.00	0.30	0.94	0.31	0.00	1.29	19.36	50.97	200	0.32	0.60	18.07	93.33%												
Fountainhead Drive	419A	MH419A	MH420A	0.19			6			16.2	91.8	4.00	1.19		0.00			0.00	0.00	0.19	1.13	0.37	0.00	1.56	19.36	43.71	200	0.32	0.60	17.79	91.83%												
Fountainhead Drive	420A	MH420A	MH421A	0.19			6			16.2	108.0	4.00	1.40		0.00			0.00	0.00	0.19	1.32	0.44	0.00	1.84	19.36	36.65	200	0.32	0.60	17.52	90.52%												
Fountainhead Drive	421A	MH421A	MH422A	0.34		6				20.4	128.4	4.00	1.66		0.00			0.00	0.00	0.34	1.66	0.55	0.00	2.21	19.36	55.00	200	0.32	0.60	17.14	88.57%												
Fountainhead Drive	422A	MH422A	Ex. MH306A	0.40	7					23.8	152.2	4.00	1.97		0.00			0.00	0.00	0.40	2.06	0.68	0.00	2.65	19.36	63.10	200	0.32	0.60	16.70	86.29%												
Fountainhead Drive - Ph2		Ex. MH306A	Ex. MH330A	0.48	9					30.6	182.8	4.00	2.37		0.00			0.00	0.00	0.48	2.54	0.84	0.00	3.21	27.59	53.70	200	0.65	0.85	24.38	88.37%												
Fountainhead Drive - Ph2		Ex. MH330A	Ex. MH329A	0.49	11					37.4	220.2	4.00	2.85		0.00			0.00	0.00	0.49	3.03	1.00	0.00	3.85	25.14	66.20	200	0.54	0.78	21.29	84.67%												
Street 2	2	13A	11A	3.33	13			59		203.5	203.5	4.00	2.64		0.00	0.00		0.00	0.00	3.33	3.33	1.10	0.00	3.74	34.22	309.00	200	1.00	1.06	30.48	89.08%												
Street 2	3	12A	11A	0.45	7					23.8	23.8	4.00	0.31		0.00			0.00	0.00	0.45	0.45	0.15	0.00	0.46	27.59	58.30	200	0.65	0.85	27.13	98.34%												
Winterhaven Drive		11A	6A	1.03	15					51.0	278.3	4.00	3.61		0.00			0.00	0.00	1.03	4.81	1.59	0.00	5.19	31.02	170.00	250	0.25	0.61	25.82	83.25%												
Knottidge Street	5	7A	6A	1.45	27					91.8	91.8	4.00	1.19		0.00			0.00	0.00	1.45	1.45	0.48	0.00	1.67	27.59	309.00	200	0.65	0.85	25.92	93.95%												
Winterhaven Drive	6	6A	MH430A	0.35	14					47.6	417.7	4.00	5.41		0.00			0.00	0.00	0.35	6.61	2.18	0.00	7.60	30.39	74.96	250	0.24	0.60	22.80	75.01%												
Beaufield Drive	424A(a), 424A(b)	MH424A	MH430A	0.71	15					51.0	51.0	4.00	0.66		0.00			0.00	0.00	0.71	0.71	0.23	0.00	0.90	34.22	91.79	200	1.00	1.06	33.32	97.38%												
Winterhaven Drive	430A	MH430A	MH431A	0.37	6					20.4	489.1	3.98	6.31		0.00			0.00	0.00	0.37	7.69	2.54	0.00	8.84	30.39	75.00	250	0.24	0.60	21.55	70.90%												
Edenbridge Drive	423A	MH423A	MH431A	0.36	6					20.4	20.4	4.00	0.26		0.00			0.00	0.00	0.36	0.36	0.12	0.00																				



Appendix D



Figure 4.1 – Conceptual Storm Sewer Plan

Figure 4.2 – Conceptual Storm Drainage Areas

Updated Phase 3 Storm Sewer Design Sheets

J:\123886_SVTPH5&6\7.0_Production\7.0_Design\Vol_04A_LAND\Agency Report\SheetSet\Figure 4.1 STORM SEWERS.dwg Layout Name: STORM SEWERS Plot Scale: 1:1 Printed At: 12/15/2025 Unit Saved By: robhead2723 Unit Saved At: Dec. 12, 25

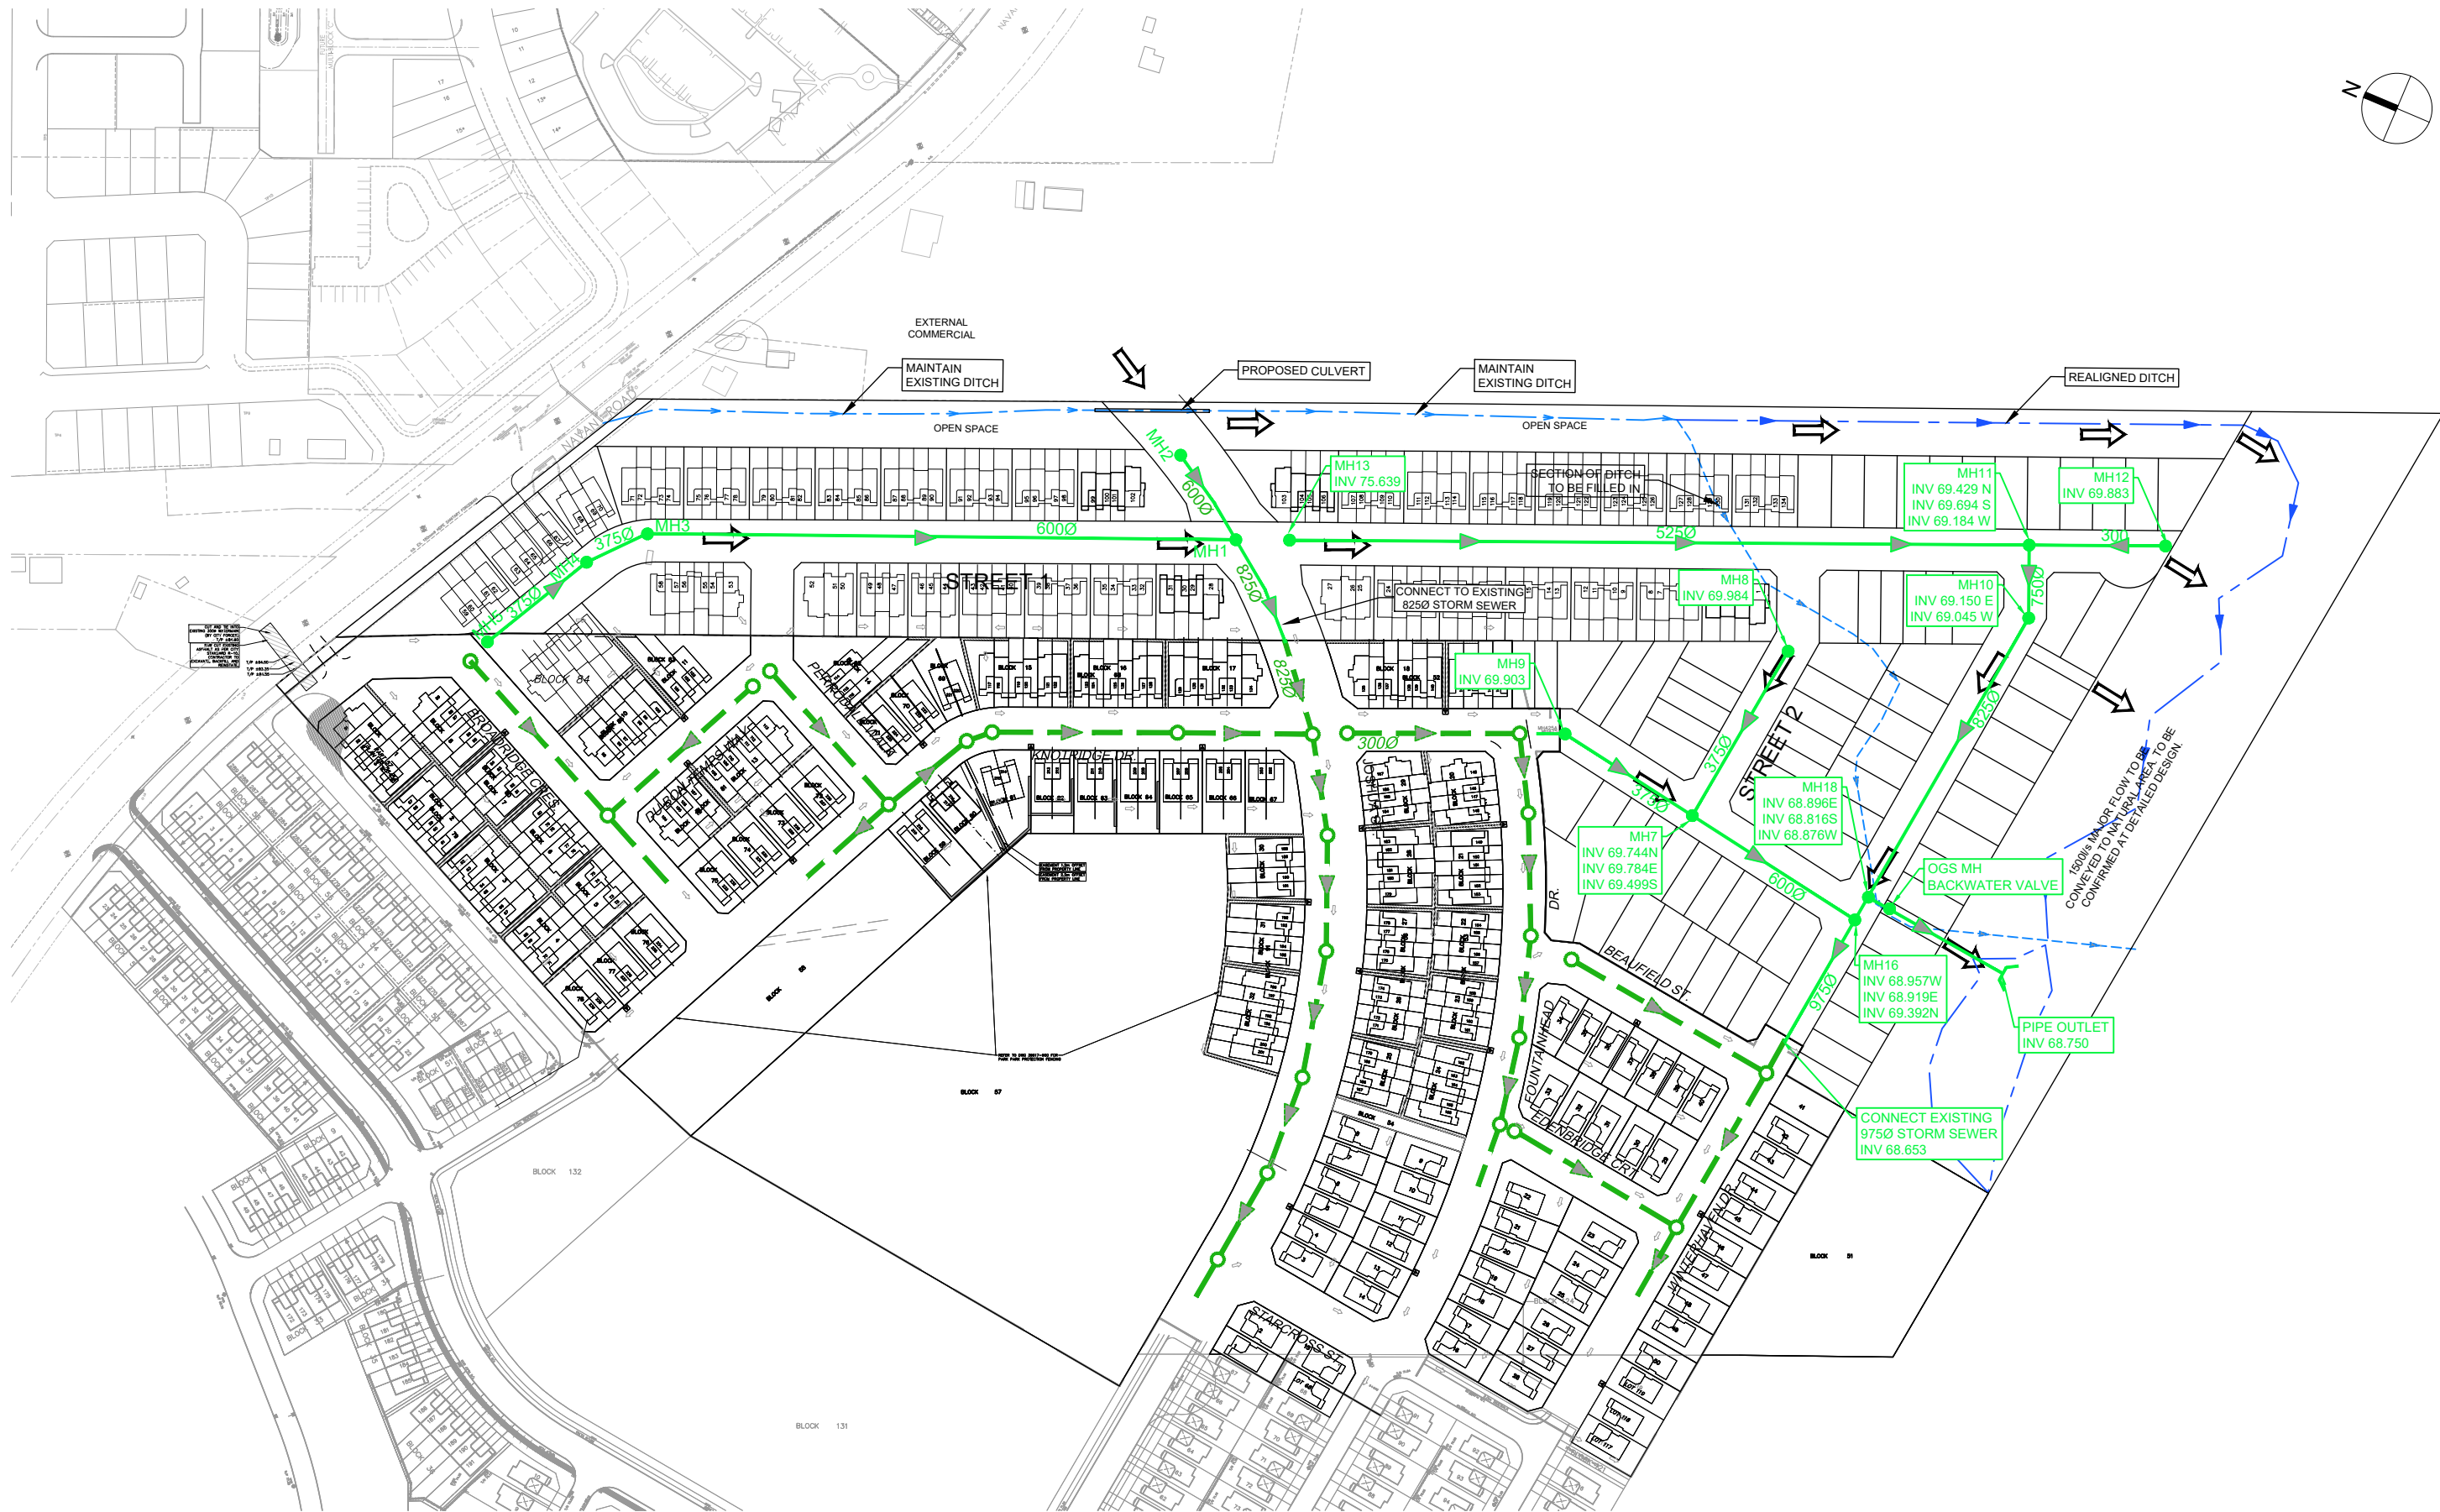

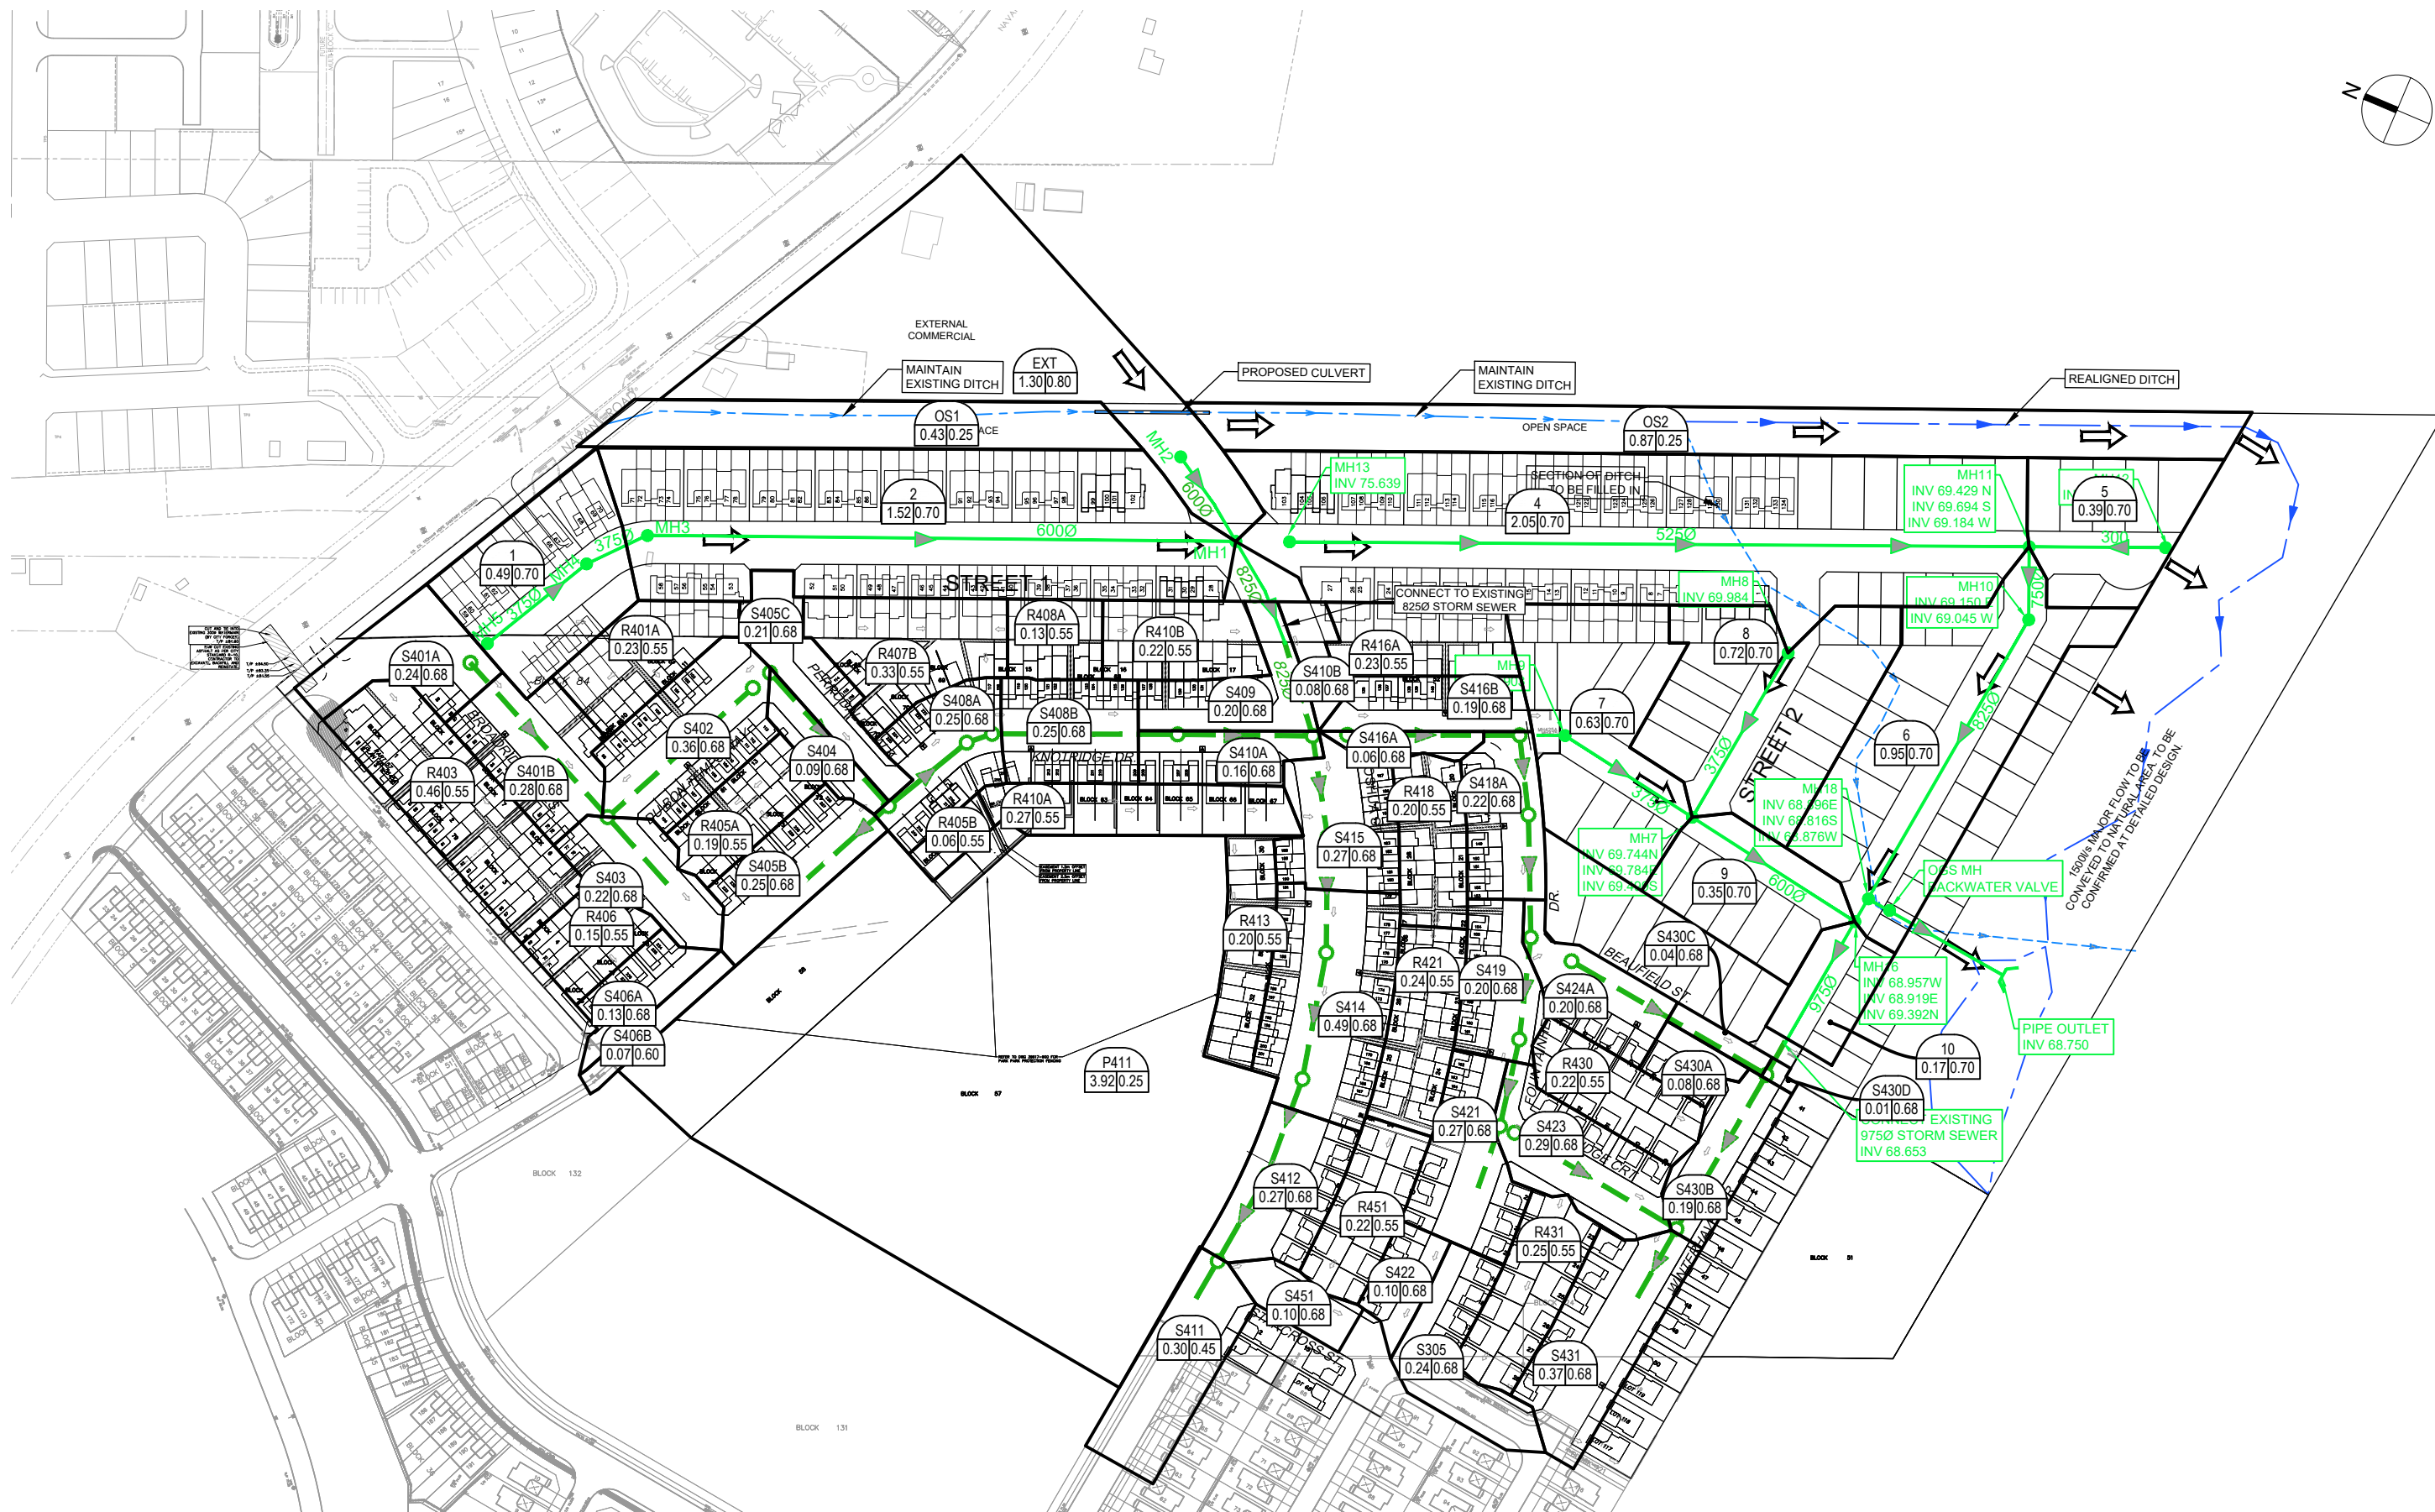

J:\123886_SVTPH5&6\7.0_Production\7.0_Design\Vol_04A_LAND_Agency Report\SheetSet\Figure 4.1 STORM SEWERS.dwg Layout Name: STORM SEWERS.dwg Plot Scale: 1:1 Plotted At: 12/15/2025 Last Saved By: rabiner722 Last Saved At: Dec. 12, 25





ARCADIS PROFESSIONAL SERVICES (CANADA) INC.
500-333 Preston Street
Ottawa, Ontario K1S 5N4 Canada
arcadis.com

CONCEPTUAL STORM SEWER DESIGN SHEET

Spring Valley Phase 5/6
City of Ottawa
Claridge Homes



LOCATION				AREA (Ha)										RATIONAL DESIGN FLOW														SEWER DATA										
STREET	AREA ID	FROM	TO	C= 0.20	C= 0.25	C= 0.45	C= 0.50	C= 0.55	C= 0.60	C= 0.68	C= 0.70	C= 0.73	C= 0.80	IND 2.78AC	CUM 2.78AC	INLET (min)	TIME IN PIPE	TOTAL (min)	i (2) (mm/hr)	i (5) (mm/hr)	i (10) (mm/hr)	i (100) (mm/hr)	2yr PEAK FLOW (L/s)	5yr PEAK FLOW (L/s)	10yr PEAK FLOW (L/s)	100yr PEAK FLOW (L/s)	ICD FLOW (L/s)	DESIGN FLOW (L/s)	CAPACITY (L/s)	LENGTH (m)	PIPE SIZE (mm) DIA	PIPE SIZE (mm) W	PIPE SIZE (mm) H	SLOPE (%)	VELOCITY (m/s)	AVAIL CAP (5yr) (L/s)	AVAIL CAP (5yr) (%)	
Broadridge Crescent	S401A, S401B, R401B	MH401	MH403					0.18		0.52				1.26	1.26	10.00	0.53	10.53	76.81	104.19	122.14	178.56	96.64					96.64	311.49	87.49	375				2.90	2.732	214.85	68.98%
Perrodale Street	S402	MH402	MH403							0.40				0.76	0.76	10.00	1.05	11.05	76.81	104.19	122.14	178.56	58.08					58.08	147.47	81.65	375				0.65	1.293	89.39	60.62%
Broadridge Crescent	S403, R403	MH403	MH406					0.46		0.22				1.12	3.13	11.05	0.43	11.48	72.99	98.95	115.96	169.48	228.72					228.72	479.60	75.00	450				2.60	2.921	250.88	52.31%
Perrodale Street	S404	MH404	MH405							0.09				0.17	0.17	10.00	0.55	10.55	76.81	104.19	122.14	178.56	13.07					13.07	116.06	75.00	250				3.50	2.291	103.00	88.74%
Knotridge Drive	S405B, R405A	MH405	MH406					0.19		0.25				0.76	0.93	10.55	1.53	12.08	74.77	101.40	118.85	173.72	69.78					69.78	162.91	91.30	450				0.30	0.992	93.13	57.17%
Knotridge Drive	S406, R406	MH406	Ex. MH325					0.15		0.10				0.42	4.49	12.08	0.68	12.76	69.65	94.36	110.56	161.55	312.39					312.39	475.05	66.43	600				0.55	1.628	162.66	34.24%
Knotridge Drive - Ph2B		Ex. MH325	Ex. MH324						1.00					0.00	4.49	12.76	0.18	12.94	67.62	91.57	107.28	156.74	303.28					303.28	452.94	16.50	600				0.50	1.552	149.67	33.04%
Knotridge Drive - Ph2B		Ex. MH324	Ex. MH319											1.67	6.15	12.94	0.59	13.53	67.11	90.88	106.46	155.53	412.94					412.94	640.56	78.00	600				1.00	2.195	227.62	35.53%
Knotridge Drive	S405C, R405B	MH405	MH407					0.06		0.11				0.30	0.30	10.00	0.35	10.35	76.81	104.19	122.14	178.56	23.02					23.02	100.99	42.27	250				2.65	1.993	77.97	77.21%
Knotridge Drive	R407	MH407	MH408					0.29						0.44	0.74	10.35	0.07	10.43	75.47	102.36	119.99	175.39	56.08					56.08	131.60	11.30	250				4.50	2.597	75.52	57.38%
Knotridge Drive	S408A-B, R408B	MH408	MH409					0.13		0.50				1.14	1.89	10.43	0.44	10.86	75.21	102.00	119.55	174.76	141.92					141.92	488.73	77.92	450				2.70	2.977	346.81	70.96%
Knotridge Drive	S409	MH409	MH410							0.20				0.38	2.27	10.86	0.32	11.18	73.65	99.85	117.03	171.04	166.82					166.82	871.26	56.75	600				1.85	2.985	704.44	80.85%
From External	EXT	2	1										1.30	2.89	2.89	10.00	1.13	11.13	76.81	104.19	122.14	178.56		301.24			301.24	516.44	120.00	600				0.65	1.769	215.19	41.67%	
Street 3	1	5	4								0.49			0.95	0.95	10.00	0.81	10.81	76.81	104.19	122.14	178.56	73.24				73.24	147.47	63.10	375				0.65	1.293	74.23	50.34%	
Street 3	2	4	3											0.00	0.95	10.81	0.29	11.11	73.82	100.09	117.30	171.45	70.39				70.39	147.47	22.80	375				0.65	1.293	77.08	52.27%	
Street 3	2	3	1								1.52			2.96	3.91	11.11	1.90	13.01	72.80	98.69	115.66	169.04	284.76				284.76	640.56	250.70	600				1.00	2.195	355.80	55.55%	
Joshua Street		1	Bulk											0.00	6.80	13.01	0.36	13.37	66.90	90.59	106.12	155.04		616.24			616.24	1,207.32	47.80	825				0.65	2.188	591.08	48.96%	
Joshua Street	S410B, R410B	BULK410E	MH410					0.22		0.08				0.49	7.29	13.37	0.31	13.69	65.89	89.20	104.49	152.64		650.32			650.32	1,207.32	41.18	825				0.65	2.188	557.00	46.14%	
Joshua Street	S410C, R410	MH410	MH415					0.27		0.16				0.72	10.27	13.69	0.29	13.98	65.05	88.05	103.14	150.65		904.32			904.32	2,206.67	42.86	1050				0.60	2.469	1302.34	59.02%	
Joshua Street	S415	MH415	MH414						0.27					0.51	10.78	13.98	0.30	14.28	64.29	87.01	101.92	148.86		938.09			938.09	3,150.52	48.67	1200				0.60	2.699	2212.43	70.22%	
Joshua Street	S414	MH414	MH413						0.49					0.93	11.71	14.28	0.64	14.92	63.52	85.96	100.68	147.05		1,006.41			1,006.41	2,083.42	54.04	1350				0.14	1.410	1077.01	51.69%	
Joshua Street	R413	MH413	MH412					0.20						0.31	12.01	14.92	0.51	15.42	61.96	83.83	98.17	143.36		1,007.02			1,007.02	2,083.42	42.81	1350				0.14	1.410	1076.41	51.67%	
Joshua Street	S412	MH412	MH411						0.27					0.51	12.52	15.42	0.49	15.92	60.79	82.21	96.27	140.58		1,029.62			1,029.62	2,083.42	41.87	1350				0.14	1.410	1053.80	50.58%	
Park Service	P411	MH411B	MH411		3.92									2.72	2.72	12.50	0.30	12.80	68.38	92.61	108.51	158.53	186.28				186.28	239.68	14.84	600				0.14	0.821	53.39	22.28%	
Joshua Street		MH411	Ex. CAP			0.30								0.38	15.62	15.92	0.37	16.28	59.68	80.70	94.50	137.97		1,260.86			1,260.86	4,323.69	36.20	1800				0.13	1.646	3062.83	70.84%	
Joshua Street - Ph2B		Ex. CAP	Ex. MH307											0.00	15.62	16.28	0.59	16.88	58.89	79.62	93.23	136.11		1,244.00			1,244.00	4,323.69	58.75	1800				0.13	1.646	3079.70	71.23%	
Joshua Street - Ph2B		Ex. MH307	Ex. MH195			0.34								0.43	16.05	16.88	1.04	17.92	57.66	77.94	91.25	133.20		1,250.82			1,250.82	4,486.91	107.00	1800				0.14	1.708	3236.09	72.12%	
Knotridge Drive	S416A-B, R416A-B	MH416	MH417					0.23		0.25				0.82	0.82	10.00	0.55	10.55	76.81	104.19	122.14	178.56	63.31				63.31	159.51	72.44	300				2.50	2.186	96.20	60.31%	
Fountainhead Drive		MH417	MH418											0.00	0.82	10.00	0.70	10.70	76.81	104.19	122.14	178.56	63.31				63.31	91.46	33.63	375				0.25	0.802	28.15	30.78%	
Fountainhead Drive	S418B, S418, R418	MH418	MH419					0.21		0.31				0.																								

Appendix E

**Figure 5.1 – Preliminary Erosion and Sediment Control Plan
Paterson Group Geotechnical Report**

Figure 6.1 – Conceptual Grading


City of Ottawa Servicing Study Guidelines Checklist

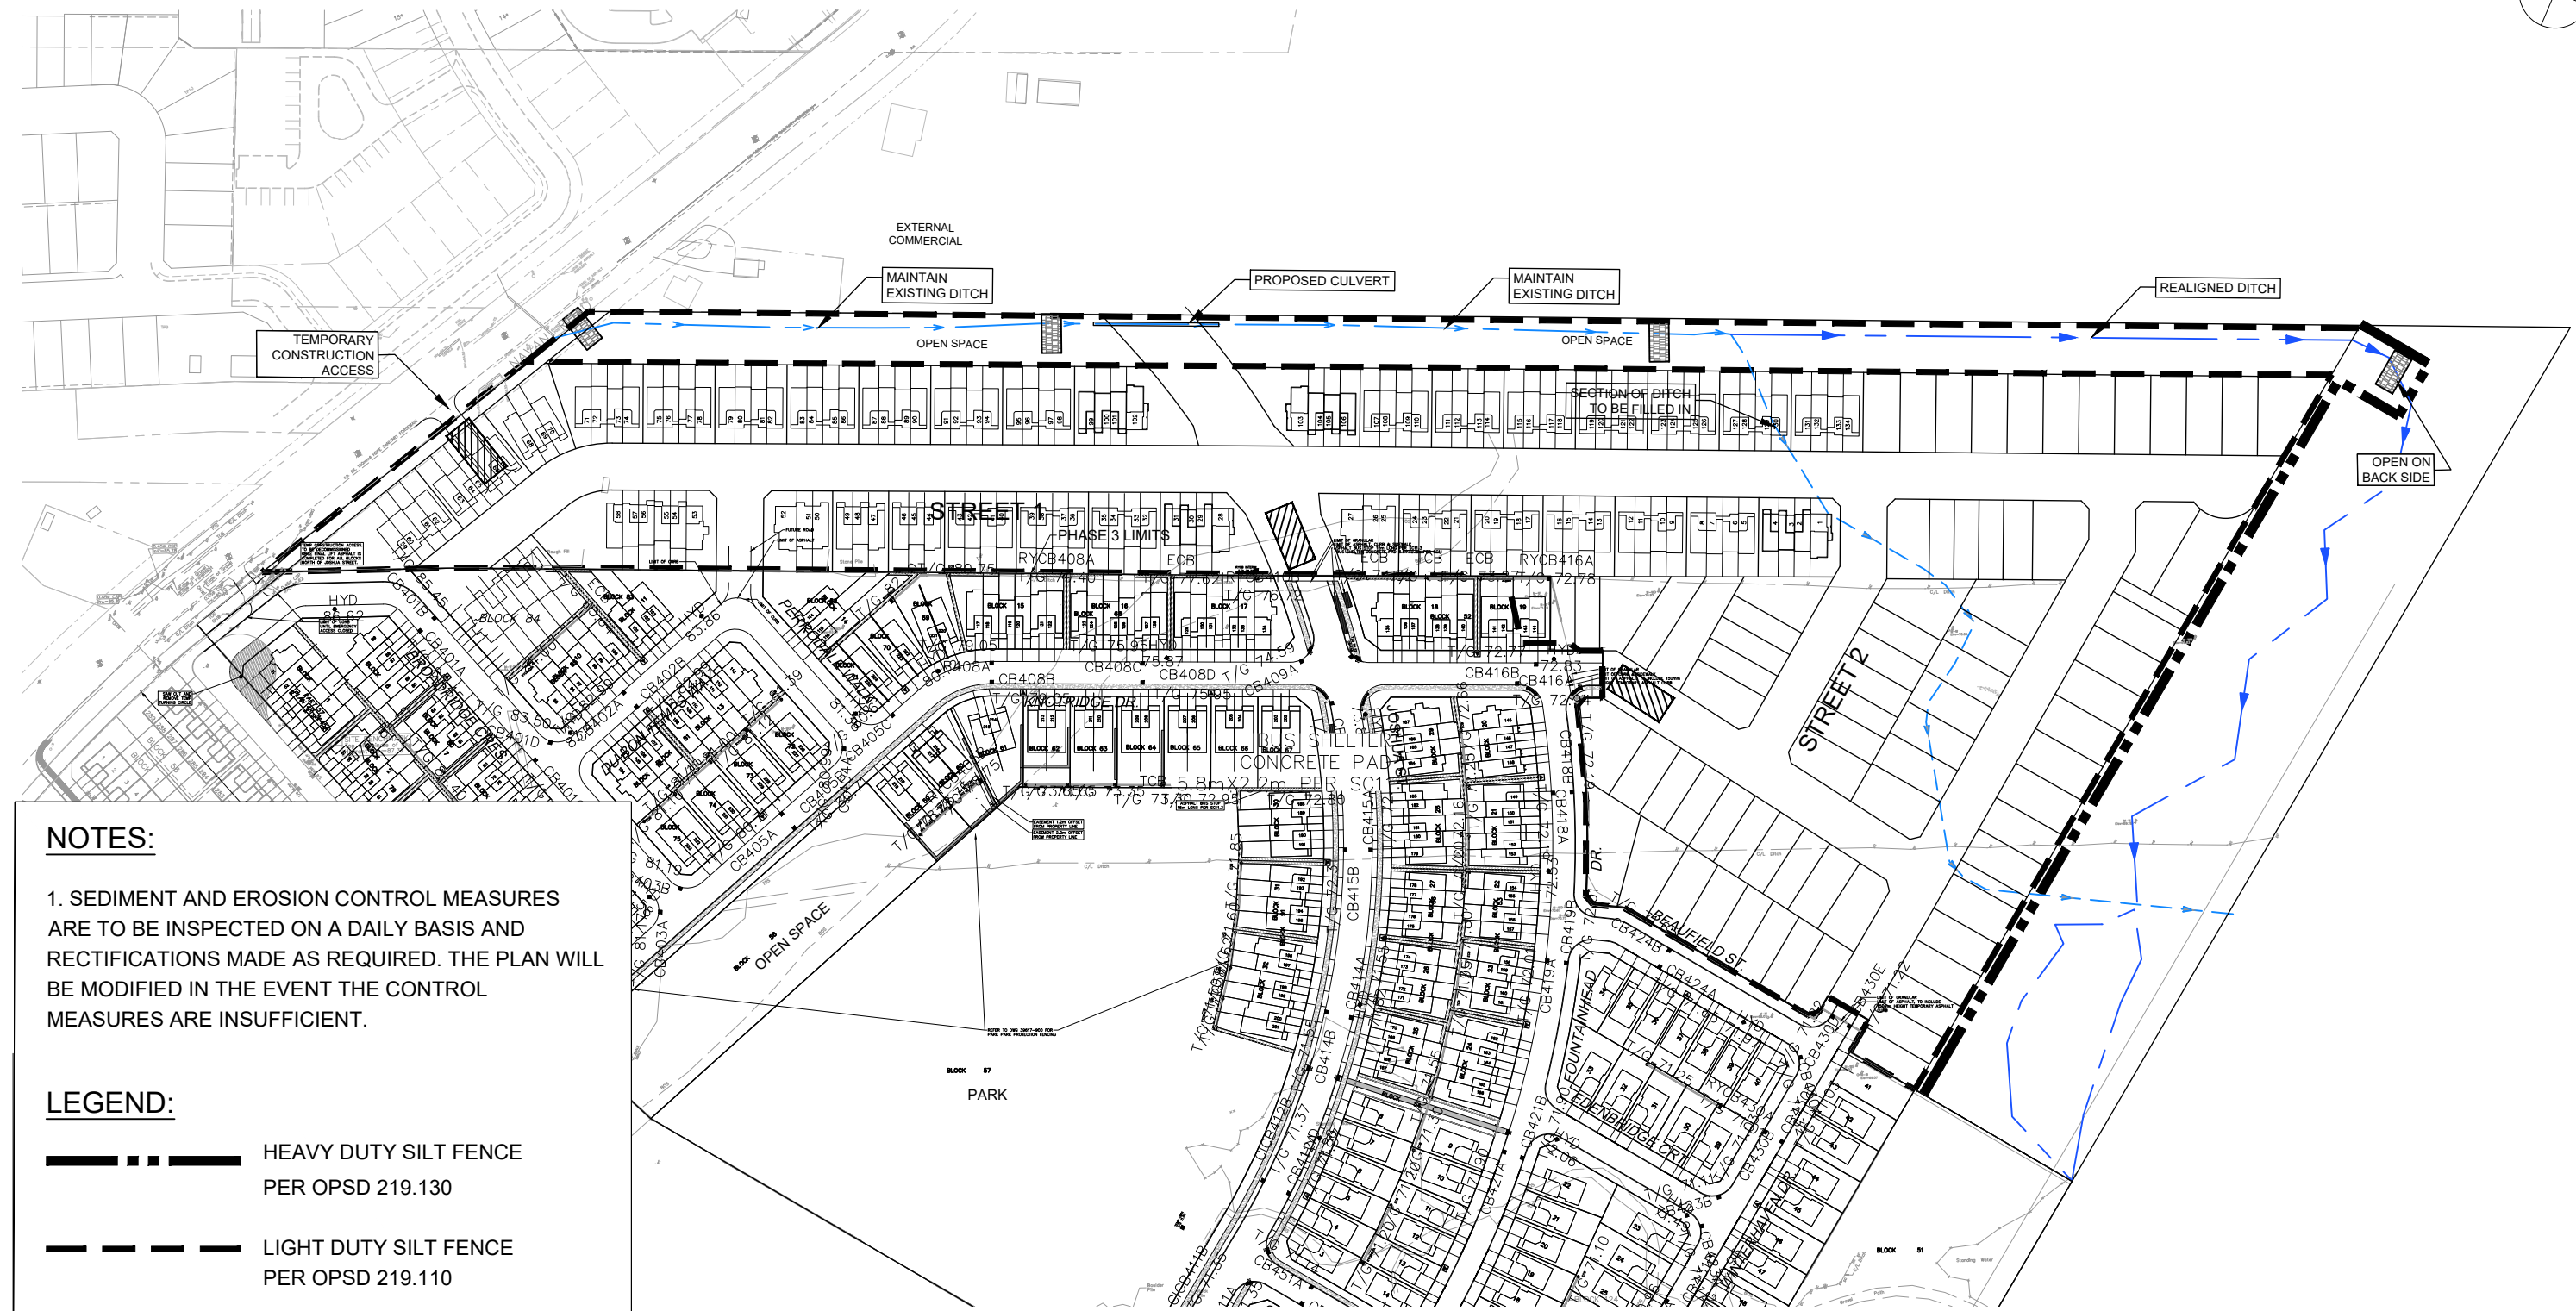

NOTES:

1. SEDIMENT AND EROSION CONTROL MEASURES ARE TO BE INSPECTED ON A DAILY BASIS AND RECTIFICATIONS MADE AS REQUIRED. THE PLAN WILL BE MODIFIED IN THE EVENT THE CONTROL MEASURES ARE INSUFFICIENT.

LEGEND:

-  HEAVY DUTY SILT FENCE PER OPSD 219.130
-  LIGHT DUTY SILT FENCE PER OPSD 219.110
-  STRAW BALE BARRIER PER OPSD 219.100
-  TEMPORARY MUD MAT 0.15m THICK 50mm CLEAR WOVEN FILTER CLOTH

Scale

Project Title

Drawing Title

Sheet No.



N.T.S.

SPRING VALLEY TRAILS
PHASE 5 & 6

EROSION AND SEDIMENT
CONTROL PLAN

Figure 5.1

**Geotechnical
Engineering**

**Environmental
Engineering**

Hydrogeology

**Geological
Engineering**

Materials Testing

Building Science

Archaeological Services

Paterson Group Inc.
Consulting Engineers
154 Colonnade Road South
Ottawa (Nepean), Ontario
Canada K2E 7J5

Tel: (613) 226-7381
Fax: (613) 226-6344
www.patersongroup.ca

patersongroup

Geotechnical Investigation

Proposed Residential Development
3252 Navan Road - Ottawa

Prepared For

Claridge Homes (Gladstone)

October 9, 2020

Report: PG5224-1 Revision 2

Table of Contents

	Page
1.0 Introduction	1
2.0 Proposed Development	1
3.0 Method of Investigation	
3.1 Field Investigation	2
3.2 Field Survey	3
3.3 Laboratory Testing	3
4.0 Observations	
4.1 Surface Conditions	4
4.2 Subsurface Profile	4
4.3 Groundwater	4
5.0 Discussion	
5.1 Geotechnical Assessment	5
5.2 Site Grading and Preparation	5
5.3 Foundation Design	6
5.4 Design of Earthquakes	8
5.5 Basement Slab/Slab-on-Grade Construction	8
5.6 Basement Wall	8
5.7 Pavement Structure	10
5.8 Slope Stability	12
6.0 Design and Construction Precautions	
6.1 Foundation Drainage and Backfill	15
6.2 Protection Against Frost Action	15
6.3 Excavation Side Slopes	15
6.4 Groundwater Control	16
6.5 Winter Construction	17
6.6 Landscaping Considerations	17
7.0 Recommendations	19
8.0 Statement of Limitations	20

Appendices

Appendix 1 Soil Profile and Test Data Sheets

Borehole by Others

Symbols and Terms

Atterberg Limits Testing Results

Appendix 2 Figure 1 - Key Plan

Figure 2A to 3C - Slope Stability Cross Sections

Photographs from Site Visit

Drawing PG5224-1 - Test Hole Location Plan

Drawing PG5224-2 - Permissible Grade Raise Plan

1.0 Introduction

Paterson Group (Paterson) was commissioned by Claridge Homes (Gladstone) to conduct a geotechnical investigation for the proposed residential development to be located at 3252 Navan Road in the City of Ottawa (refer to Figure 1 - Key Plan presented in Appendix 2). The objective of the investigation was to:

- ☐ determine the subsurface soil and groundwater conditions by means of boreholes and monitoring well program.
- ☐ provide preliminary geotechnical recommendations for the foundation design of the proposed buildings and provide geotechnical construction precautions which may affect the design.

The following report has been prepared specifically and solely for the aforementioned project which is described herein. The report contains our findings and includes geotechnical recommendations pertaining to the design and construction of the proposed development as understood at the time of this report.

Investigating the presence or potential presence of contamination on the subject property was not part of the scope of work of this present investigation. Therefore, the present report does not address environmental issues.

2.0 Proposed Development

Details of the proposed development were not available at the time of issuance of this report. Based on current available information, it is expected that the proposed development will consist of low rise residential dwellings and townhouse style housing. Local roadways and residential driveways are also anticipated for the proposed development. It is further anticipated that the site will be serviced by future municipal services.

3.0 Method of Investigation

3.1 Field Investigation

The field program for the current investigation was carried out on May 16, 17 and 22, 2019 as well as September 5, 2019. At that time, thirteen boreholes were completed to a maximum depth of 10.7 m below existing ground surface. A supplemental field investigation was carried out on September 10 and 11, 2020. At that time, thirteen boreholes were completed to a maximum depth of 11.3 m below existing ground surface. The test hole locations were placed in a manner to provide general coverage taking into consideration site access, features and underground utilities. The test hole locations for the current investigation are presented on Drawing PG5224-1 - Test Hole Location Plan included in Appendix 2.

The boreholes were completed using a portable drill rig or a track-mounted auger drill rig operated by a two person crew. All fieldwork was conducted under the full-time supervision of Paterson personnel under the direction of a senior engineer from the geotechnical division. The testing procedure consisted of augering to the required depths and at the selected locations sampling the overburden.

Sampling and In Situ Testing

Soil samples were recovered from the auger flights, and using a 50 mm diameter split-spoon sampler or a thin walled Shelby tube in combination with a fixed piston sampler. The split-spoon samples were placed in sealed plastic bags and the Shelby tubes were sealed at both ends on site. All the samples were transported to our laboratory. The depths at which the auger and split-spoon samples were recovered from the boreholes are shown as AU and SS, respectively, on the Soil Profile and Test Data sheets in Appendix 1.

A Standard Penetration Test (SPT) was conducted in conjunction with the recovery of the split spoon samples. The SPT results are recorded as "N" values on the Soil Profile and Test Data sheets. The "N" value is the number of blows required to drive the split spoon sampler 300 mm into the soil after a 150 mm initial penetration using a 63.5 kg hammer falling from a height of 760 mm.

The overburden thickness was evaluated by a dynamic cone penetration test (DCPT) completed. The DCPT consists of driving a steel drill rod, equipped with a 50 mm diameter cone at the tip, using a 63.5 kg hammer falling from a height of 760 mm. The number of blows required to drive the cone into the soil is recorded for each 300 mm increment.

Subsurface conditions observed in the test holes were recorded in detail in the field. Reference should be made to the Soil Profile and Test Data sheets presented in Appendix 1 for specific details of the soil profile encountered at the test hole locations

Groundwater

51 mm diameter groundwater monitoring wells were installed in all the boreholes to monitor the groundwater level subsequent to the completion of the sampling program. The groundwater observations are discussed in Subsection 4.3 and presented in the Soil Profile and Test Data sheets in Appendix 1.

Sample Storage

All samples from the current investigation will be stored in the laboratory for a period of one month after issuance of this report. They will then be discarded unless we are otherwise directed.

3.2 Field Survey

The test hole locations were determined by Paterson personnel and surveyed in the field by Annis O'Sullivan Vollebekk Ltd. The locations of the boreholes are presented on Drawing PG5224-1 - Test Hole Location Plan in Appendix 2.

3.3 Laboratory Testing

The soil samples recovered from our field investigation were examined in our laboratory to corroborate the field findings.

A total of 5 representative soil samples were submitted for Atterberg limits testing as part of the current geotechnical investigation.

4.0 Observations

4.1 Surface Conditions

The subject site is currently occupied by a earthworks/landscaping contractor. A 2 storey structure of slab on grade construction used as office space is located on the north portion of the site near Navan Road. Numerous stockpiles of different type of fill and landscaping material are piled further south with laneways to allow movement of heavy equipment between them. Fill material was noted to have been placed to extend the level working area towards the center of the property. This platform created a slope approximately 6 m in height. The south portion of the site slopes down toward the Prescott-Russell Trail Link and is covered by mature trees and vegetation.

4.2 Subsurface Profile

Generally, the soil profile encountered at the test hole locations consists of a layer of fill composed mainly of silty sand with trace clay and some construction debris overlying a stiff to very stiff brown silty clay crust followed by a deep, stiff to firm grey silty clay deposit. Reference should be made to the Soil Profile and Test Data sheets in Appendix 1 for the details of the soil profile encountered at each test hole location.

Bedrock

Based on available geological mapping, the bedrock in the area is part of the Billings formation, which consists of shale. Also, based on available geological mapping, the overburden thickness is expected to range from 25 to 50 m.

4.3 Groundwater

Groundwater level readings were recorded on May 30 and 31, 2019 as well as September 9, 2019 at the monitoring well locations. The groundwater level readings are presented in the Soil Profile and Test Data sheets in Appendix 1. It should be noted that surface water can become trapped within a backfilled borehole that can lead to higher than typical groundwater level observations. Long-term groundwater level can also be estimated based on the observed color, moisture levels and consistency of the recovered soil samples. Based on these observations, the long-term groundwater level is expected between 3 to 4 m depth. It should be noted that groundwater levels are subject to seasonal fluctuations, therefore the groundwater levels could vary at the time of construction.

5.0 Discussion

5.1 Geotechnical Assessment

From a geotechnical perspective, the subject site is suitable for a residential development. However, due to the presence of the sensitive silty clay layer, a proposed development will be subjected to grade raise restrictions.

For areas where the existing fill and deleterious material is encountered below the proposed building footprint, it is recommended to sub-excavate the building footprint to a native silty clay bearing surface and reinstate with a compact fill approved by Paterson at the time of construction. It should be further noted that our permissible grade raise restrictions provided in Subsection 5.3 may be adjusted once settlement monitoring data is available to determine the current settlement rate associated with the existing fill piles within the west and central portions of the current development phase.

The above and other considerations are further discussed in the following sections.

5.2 Site Grading and Preparation

Stripping Depth

Topsoil and deleterious fill, such as those containing organic materials, should be stripped from under any buildings, paved areas, pipe bedding and other settlement sensitive structures. The existing fill, where free of organics and deleterious materials, should be proof-rolled by a vibratory roller making several passes and approved by Paterson personnel. Poor performing fill should be removed and reinstated with a compacted engineered fill as detailed below.

Fill Placement

Fill used for grading beneath the building areas should consist, unless otherwise specified, of clean imported granular fill, such as Ontario Provincial Standard Specifications (OPSS) Granular A or Granular B Type II or approved alternative. Granular material should be tested and approved prior to delivery to the site. The fill should be placed in loose lifts of 300 mm thick or less and compacted using suitable compaction equipment for the lift thickness. Fill placed beneath the building areas should be compacted to at least 98% of the Standard Proctor Maximum Dry Density (SPMDD).

Non-specified existing fill along with site-excavated soil can be used as general landscaping fill and beneath parking areas where settlement of the ground surface is of minor concern. In landscaped areas, these materials should be spread in thin lifts and at least compacted by the tracks of the spreading equipment to minimize voids. If these materials are to be used to build up the subgrade level for areas to be paved, they should be compacted in thin lifts to a minimum density of 95% of the SPMDD.

Non-specified existing fill and site-excavated soils are not suitable for use as backfill against foundation walls unless a composite drainage blanket connected to a perimeter drainage system is provided.

Proof Rolling

For the proposed driveways and roadways, proof rolling of the subgrade is required in areas where the existing fill, free of organics and deleterious materials, is encountered. It is recommended that the subgrade surface be proof-rolled **under dry conditions and above freezing temperature** by an adequately sized roller making several passes to achieve optimum compaction levels. The compaction program should be reviewed and approved by the geotechnical consultant at the time of construction.

5.3 Foundation Design

Bearing Resistance Values

Using continuously applied loads, footings for the proposed buildings can be designed using the bearing resistance values presented in Table 2.

Table 2 - Bearing Resistance Values		
Bearing Surface	Bearing Resistance Value at SLS (kPa)	Factored Bearing Resistance Value at ULS (kPa)
Stiff Brown Silty Clay	100	200
Firm Grey Silty Clay	60	120
Engineered Fill	100	200
Note: Strip footings, up to 1.5 m wide, and pad footings, up to 3 m wide, can be designed using the above noted bearing resistance values.		

The bearing resistance values are provided on the assumption that the footings will be placed on undisturbed soil bearing surfaces. An undisturbed soil bearing surface consists of one from which all topsoil and deleterious materials, such as loose, frozen or disturbed soil, whether in-situ or not, have been removed, prior to the placement of concrete for footings.

Bearing resistance values for footing design should be determined on a per lot basis at the time of construction.

The bearing medium under footing-supported structures is required to be provided with adequate lateral support with respect to excavations and different foundation levels. Adequate lateral support is provided to the in-situ bearing medium soils above the groundwater table when a plane extending down and out from the bottom edge of the footing at a minimum of 1.5H:1V passes only through in-situ soil of the same or higher capacity as the bearing medium soil.

Settlement

The total and differential settlements will be dependent on characteristics of the proposed buildings. For design purposes, the total and differential settlements are estimated to be 25 and 20 mm, respectively. A post-development groundwater lowering of 0.5 m was assumed.

The potential post construction total and differential settlements are dependent on the position of the long term groundwater level when buildings are situated over deposits of compressible silty clay. Efforts can be made to reduce the impacts of the proposed development on the long term groundwater level by placing clay dykes in the service trenches, reducing the sizes of paved areas, leaving green spaces to allow for groundwater recharge or limiting planting of trees to areas away from the buildings. However, it is not economically possible to control the groundwater level.

Permissible Grade Raise Recommendations

Based on the undrained shear strength testing results and our experience with the local silty clay deposit, we have determined permissible grade raise restrictions for the current development phase. The recommended permissible grade raise restrictions are presented on Drawing PG5224-2 - Permissible Grade Raise Plan in Appendix 2. It is important to note that the grade raise restrictions presented are given from original native ground surface elevation. Due to the presence of the existing fill layer, it is recommended that a settlement monitoring program be completed to confirm if the permissible grade raise restrictions can be adjusted due to effect of the fill piles. It is recommended that a series of settlement plates be installed within the fill area and periodic settlement monitoring be completed by Paterson to verify the on-going settlement rate of the underlying silty clay deposit. Details of the recommended settlement monitoring program can be provided once preliminary grading has been determined for the current development phase.

The following options could be used alone or in combination, where grade raise exceedances occur. Where limited grade raise is proposed over the existing fill lightweight fill (LWF) can be used. LWF consists of EPS (expanded polystyrene) Type 19 or 22 blocks or other light weight materials which allow for raising the grade without adding a significant load to the underlying soils. However, these materials are expensive and, in the case of the EPS, are more difficult to use under the groundwater level, as they are buoyant, and must be protected against potential hydrocarbon spills. Use lightweight fill within the interior of the garage and porch areas to reduce the fill related loads.

Provided sufficient time is available to induce the required settlements, consideration could be given to surcharging the subject site. Settlement plates to monitor long term settlement should be installed at selected locations within the existing fill pile. Once the desired settlements have taken place, the surcharged portion can be removed and the site is considered acceptable for development.

5.4 Design for Earthquakes

A seismic site response **Class E** should be used for design of the proposed buildings at the subject site according to the OBC 2012. The soils underlying the site are not susceptible to liquefaction.

5.5 Basement Slab/Slab-on-Grade Construction

With the removal of all topsoil and deleterious fill, containing organic matter, within the footprints of the proposed buildings, the native soil surface, approved engineered fill pad or approved existing fill will be considered an acceptable subgrade on which to commence backfilling for floor slab construction.

Any soft areas should be removed and backfilled with appropriate backfill material. A clear crushed stone fill is recommended for backfilling below the floor slab for limited span slab-on-grade areas, such as front porch or garage footprints. It is recommended that the upper 200 mm of sub-slab fill consist of 19 mm clear crushed stone below basement floor slabs.

5.6 Basement Wall

There are several combinations of backfill materials and retained soils that could be applicable for the basement walls of the subject structure. However, the conditions can be well-represented by assuming the retained soil consists of a material with an angle of internal friction of 30 degrees and a bulk (drained) unit weight of 20 kN/m^3 . The applicable effective (undrained) unit weight of the retained soil can be taken as 13 kN/m^3 , where applicable.

Lateral Earth Pressures

The static horizontal earth pressure (p_o) can be calculated using a triangular earth pressure distribution equal to $K_o \cdot \gamma \cdot H$ where:

- K_o = at-rest earth pressure coefficient of the applicable retained soil, 0.5
- γ = unit weight of fill of the applicable retained soil (kN/m^3)
- H = height of the wall (m)

An additional pressure having a magnitude equal to $K_o \cdot q$ and acting on the entire height of the wall should be added to the above diagram for any surcharge loading, q (kPa), that may be placed at ground surface adjacent to the wall. The surcharge pressure will only be applicable for static analyses and should not be used in conjunction with the seismic loading case.

Actual earth pressures could be higher than the “at-rest” case if care is not exercised during the compaction of the backfill materials to maintain a minimum separation of 0.3 m from the walls with the compaction equipment.

Seismic Earth Pressures

The total seismic force (P_{AE}) includes both the earth force component (P_o) and the seismic component (ΔP_{AE}). The seismic earth force (ΔP_{AE}) can be calculated using $0.375 \cdot a_c \cdot \gamma \cdot H^2 / g$ where:

- $a_c = (1.45 - a_{\max} / g) a_{\max}$
- γ = unit weight of fill of the applicable retained soil (kN/m^3)
- H = height of the wall (m)
- g = gravity, 9.81 m/s^2

The peak ground acceleration, ($a_{\max}$), for the Ottawa area is 0.32g according to OBC 2012. Note that the vertical seismic coefficient is assumed to be zero.

The earth force component (P_o) under seismic conditions can be calculated using $P_o = 0.5 K_o \gamma H^2$, where $K_o = 0.5$ for the soil conditions noted above.

The total earth force (P_{AE}) is considered to act at a height, h (m), from the base of the wall, where:

$$h = \{P_o \cdot (H/3) + \Delta P_{AE} \cdot (0.6 \cdot H)\} / P_{AE}$$

The earth forces calculated are unfactored. For the ULS case, the earth loads should be factored as live loads, as per OBC 2012.

5.7 Pavement Structure

For design purposes, the pavement structure presented in the following tables could be used for the design of driveways, local residential streets and roadways with bus traffic. It should be noted that for residential driveways and car only parking areas, an Ontario Traffic Category A is applicable. For local roadways and roadways with bus traffic, an Ontario Traffic Category B and Category D should be used for design purposes, respectively.

Table 3 - Recommended Pavement Structure - Driveways	
Thickness (mm)	Material Description
50	Wear Course - HL 3 or Superpave 12.5 Asphaltic Concrete
150	BASE - OPSS Granular A Crushed Stone
300	SUBBASE - OPSS Granular B Type II
SUBGRADE - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil or fill	

Table 4 - Recommended Pavement Structure - Local Residential Roadways	
Thickness (mm)	Material Description
40	Wear Course - Superpave 12.5 Asphaltic Concrete
50	Binder Course - Superpave 19.0 Asphaltic Concrete
150	BASE - OPSS Granular A Crushed Stone
400	SUBBASE - OPSS Granular B Type II
SUBGRADE - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil or fill	

Table 5 - Recommended Pavement Structure - Roadways with Bus Traffic	
Thickness mm	Material Description
40	Wear Course - Superpave 12.5 Asphaltic Concrete
50	Upper Binder Course - Superpave 19.0 Asphaltic Concrete
50	Lower Binder Course - Superpave 19.0 Asphaltic Concrete
150	BASE - OPSS Granular A Crushed Stone
600	SUBBASE - OPSS Granular B Type II
SUBGRADE - Either fill, in situ soil or OPSS Granular B Type I or II material placed over in situ soil or fill	

If soft spots develop in the subgrade during compaction or due to construction traffic, the affected areas should be excavated and replaced with OPSS Granular B Type II material. Weak subgrade conditions may be experienced over service trench fill materials. This may require the use of a geotextile, thicker subbase or other measures that can be recommended at the time of construction as part of the field observation program.

Minimum Performance Graded (PG) 58-34 asphalt cement should be used for driveways and local roadways and PG 64-34 asphalt cement should be used for roadways with bus traffic. The pavement granular base and subbase should be placed in maximum 300 mm thick lifts and compacted to a minimum of 100% of the material's SPMDD using suitable vibratory equipment.

Pavement Structure Drainage

Satisfactory performance of the pavement structure is largely dependent on the contact zone between the subgrade material and the base stone in a dry condition. Failure to provide adequate drainage under conditions of heavy wheel loading can result in the fine subgrade soil being pumped into the voids in the stone subbase, thereby reducing load carrying capacity.

Due to the low permeability of the subgrade materials consideration should be given to installing subdrains during the pavement construction as per City of Ottawa standards. The subdrain inverts should be approximately 300 mm below subgrade level. The subgrade surface should be crowned to promote water flow to the drainage lines.

5.8 Slope Stability

A slope stability analysis was modeled in SLIDE, a computer program which permits a two-dimensional slope stability analysis calculating several methods including the Bishop's method, which is a widely accepted slope analysis method. The program calculates a factor of safety, which represents the ratio of the forces resisting failure to forces favoring failure. Theoretically, a factor of safety of 1.0 represents a condition where the slope is stable. However, due to intrinsic limitations of the calculation methods and the variability of the subsurface soil and groundwater conditions, a factor of safety greater than 1.0 is generally required for the failure risk to be considered acceptable. A minimum factor of safety of 1.5 is generally recommended for conditions where the slope failure would comprise occupied structures. An analysis considering seismic loading was also completed. A peak ground acceleration of 0.32G was considered for the sections for the seismic loading condition. A factor of safety of 1.1 is considered to be satisfactory for stability analyses including seismic loading.

Six slope sections were studied for the subject slopes, see Drawing PG5224-1 - Test Hole Location Plan in Appendix 2 for the section locations. It should be noted that details of the slope height and slope angle at the cross-section locations are presented in Figures 2A through 7B in Appendix 2. The slope details were based on available historic topographic data and topographic information from a recent site visit by Paterson.

Various stockpiles of material were noted based on our site visits and review of aerial photographs. Figure 2A and 3A show the slope section with the presence of the stockpiled material under static conditions. It is expected that the stockpiles will be relocated as part of the proposed development. Therefore, the subject slope was then analyzed as presented in Figures 2B, 2C, 3B and 3C without the presence of stockpiled material.

Figures 4A to 7B present the results of our slope stability analysis for the existing slope located adjacent to the east property boundary. A 2 to 6 m wide, ditch watercourse runs near or at the toe of the existing slope. The subject section of the watercourse was noted to be approximately 600 mm deep up to the normal high watermark. Photographs from our recent site visit are presented in Appendix 2. Based on the preliminary grading plan, an open space block will be created for the ditch watercourse and proposed slope between the watercourse and finished grading at the rear lot line of the adjacent buildings. The preliminary grading details for the proposed development indicate that sufficient space is available to provide a 3H:1V slope from the rear property line to the adjacent watercourse.

Existing Slope within Proposed Development

The stable slope limit is defined by the extent of the lowest slip circle analyzed behind the top of slope where the minimum factor of safety calculated is less than 1.5. The static analysis results for slope sections (Sections A and B) along the slope within the proposed development are presented in Figures 2B and 3B, respectively. The factor of safety for the slope was greater than 1.5 for the slope sections analysed.

The results of the analyses with seismic loading for Sections A and B are shown in Figures 2C and 3C, respectively. The results indicate that the factor of safety for the section A is greater than 1.1. Based on the results, Section A is considered stable under seismic loading. However, a factor of safety less than 1.1 was noted for Section B, therefore, a slope stability setback would be required, if the existing slope were not re-graded as part of the proposed development. A stable slope setback of 8.7 m at Section B will be required if the existing slope is not modified. However, the existing slope will be re-graded as part of the proposed development. It is recommended that the proposed grading provide a 3H:1V profile or flatter for any subject slopes required as part of the proposed development.

Slope adjacent to Ditch Watercourse

The static analysis results for slope sections along the ditch watercourse are presented in Sections C to F (Figures 4A and 7A). The factor of safety for the existing slope was greater than 1.5 for the slope sections analysed, with the exception of Sections D and F. A stable slope allowance setback from top of existing slope was presented in Figures 5A and 7A for Sections D and F, respectively. However, as previously noted, it is expected that the existing slope will be re-graded to provide a stable slope shaped to a 3H:1V profile or flatter as part of the proposed development. Therefore, a stable slope allowance will not be required for the future slope to be re-shaped along the watercourse.

The results of the analyses when considering seismic loading for the slope along the watercourse are shown in Figures 4B, 5B, 6B and 7B. The results indicate that the factor of safety for the section A is greater than 1.1 with the exception of Sections D and F. A stable slope allowance setback from top of existing slope was presented in Figures 5B and 7B for Sections D and F, respectively. However, as previously noted, it is expected that the existing slope will be re-graded to provide a stable slope shaped to a 3H:1V profile or flatter as part of the proposed development. Therefore, a stable slope allowance will not be required for the future slope to be re-shaped along the watercourse.

Limit of Hazard Lands

Based on available information for the proposed development, it is expected that the existing slope along the ditch watercourse will be reshaped to provide a stable slope within the future, open space block. Therefore, a stable slope allowance will not be required for the subject slope. It is recommended to reshape the area to a maximum 3H:1V slope or flatter and reinstate vegetation by placing 100 to 150 mm of topsoil mixed with hardy seed and/or an erosion control blanket.

A toe erosion allowance is not required for the subject slope due to the absence of active erosion along the slope toe. It is expected, that a grassed face slope will be sufficient to provide resistance to any surficial erosion that could occur. Also, based on the absence of active erosion, a 6 m erosion access allowance is not required for the subject slope. **Therefore, a limit of hazard lands setback line can be applied along the top of the ditch watercourse bank since an allowance setback is not required for the future slope to be constructed adjacent to the watercourse.**

6.0 Design and Construction Precautions

6.1 Foundation Drainage and Backfill

A perimeter foundation drainage system is recommended for proposed structures. The system should consist of a 150 mm diameter, geotextile-wrapped, perforated, corrugated, plastic pipe, surrounded on all sides by 150 mm of 19 mm clear crushed stone, placed at the footing level around the exterior perimeter of the structure. The pipe should have a positive outlet, such as a gravity connection to the storm sewer.

Backfill against the exterior sides of the foundation walls should consist of free-draining, non frost susceptible granular materials. The site materials will be frost susceptible and, as such, are not recommended for re-use as backfill unless a composite drainage system (such as system Platon or Miradrain G100N) connected to a drainage system is provided.

6.2 Protection Against Frost Action

Perimeter footings of heated structures are required to be insulated against the deleterious effect of frost action. A minimum 1.5 m thick soil cover (or equivalent) should be provided in this regard.

A minimum of 2.1 m thick soil cover (or equivalent) should be provided for other exterior unheated footings.

6.3 Excavation Side Slopes

The excavations for the proposed development will be mostly through a stiff silty clay. Where excavation is above the groundwater level to a depth of approximately 3 m, the excavation side slopes should be stable in the short term at 1H:1V. Flatter slopes could be required for deeper excavations or for excavation below the groundwater level. Where such side slopes are not permissible or practical, temporary shoring should be used. The subsoil at this site is considered to be mainly a Type 2 or 3 soil according to the Occupational Health and Safety Act and Regulations for Construction Projects.

The slope cross-sections recommended above are for temporary slopes. Excavated soil should not be stockpiled directly at the top of excavations and heavy equipment should be kept away from the excavation sides.

It is recommended that a trench box be used at all times to protect personnel working in trenches with steep or vertical sides. It is expected that services will be installed by “cut and cover” methods and excavations will not be left open for extended periods of time.

It is expected that deep service trenches in excess of 3 m will be completed using a temporary shoring system designed by a structural engineer, such as stacked trench boxes in conjunction with steel plates. The trench boxes should be installed to ensure that the excavation sidewalls are tight to the outside of the trench boxes and that the steel plates are extended below the base of the excavation to prevent basal heave (if required).

Slopes in excess of 3 m in height should be periodically inspected by the geotechnical consultant in order to detect if the slopes are exhibiting signs of distress.

6.4 Groundwater Control

Due to the relatively impervious nature of the silty clay materials, it is anticipated that groundwater infiltration into the excavations should be low and controllable using open sumps. Pumping from open sumps should be sufficient to control the groundwater influx through the sides of shallow excavations.

Permit to Take Water

A temporary Ministry of the Environment, Conservation and Parks (MECP) permit to take water (PTTW) may be required for this project if more than 400,000 L/day of ground and/or surface water is to be pumped during the construction phase. A minimum of 4 to 5 months should be allowed for completion of the PTTW application package and issuance of the permit by the MECP.

For typical ground or surface water volumes being pumped during the construction phase, between 50,000 to 400,000 L/day, it is required to register on the Environmental Activity and Sector Registry (EASR). A minimum of two to four weeks should be allotted for completion of the EASR registration and the Water Taking and Discharge Plan to be prepared by a Qualified Person as stipulated under O.Reg. 63/16. If a project qualifies for a PTTW based upon anticipated conditions, an EASR will not be allowed as a temporary dewatering measure while awaiting the MECP review of the PTTW application.

The contractor should be prepared to direct water away from all bearing surfaces and subgrades, regardless of the source, to prevent disturbance to the founding medium.

6.5 Winter Construction

The subsurface conditions at this site mostly consist of frost susceptible materials. In presence of water and freezing conditions ice could form within the soil mass. Heaving and settlement upon thawing could occur. Precautions should be taken if winter construction is considered for this project.

In the event of construction during below zero temperatures, the founding stratum should be protected from freezing temperatures by the use of straw, propane heaters, tarpaulins or other suitable means. In this regard, the base of the excavations should be insulated from sub-zero temperatures immediately upon exposure and until such time as heat is adequately supplied to the building and the footings are protected with sufficient soil cover to prevent freezing at founding level.

The trench excavations should be constructed in a manner that will avoid the introduction of frozen materials into the trenches. As well, pavement construction is difficult during winter. The subgrade consists of frost susceptible soils which will experience total and differential frost heaving as the work takes place. In addition, the introduction of frost, snow or ice into the pavement materials, which is difficult to avoid, could adversely affect the performance of the pavement structure. Additional information could be provided, if required.

6.6 Landscaping Considerations

Tree Planting Restrictions

In accordance with the City of Ottawa Tree Planting in Sensitive Marine Clay Soils (2017 Guidelines), Paterson completed a soils review of the site to determine applicable tree planting setbacks. Atterberg limits testing was completed for the recovered silty clay samples at selected locations throughout the subject site. The soil samples were recovered from elevations 2.1 m below the current ground surface elevation. The results of our testing are presented in Appendix 1.

Based on the results of the representative soil samples, the subject site is considered as a **low/medium** sensitivity area for tree planting according to the City of Ottawa Tree Planting in Sensitive Marine Clay Soils (2017 Guidelines)

Since the modified plasticity limit (PI) generally does not exceed 40%, large trees (mature height over 14 m) can be planted at the subject site provided a tree to foundation setback equal to the full mature height of the tree can be provided (e.g. in a park or other green space).

Based on our testing results, tree planting setback limits should be 4.5 m for small (mature tree height up to 7.5m) and medium size trees (mature tree height 7.5 m to 14 m) provided that the following conditions are met:

- ☐ The underside of footing (USF) is 2.1 m or greater below the lowest finished grade must be satisfied for footings within 10 m from the tree, as measured from the centre of the tree trunk and verified by means of the Grading Plan as indicated procedural changes below.
- ☐ A small tree must be provided with a minimum of 25 m³ of available soil volume while a medium tree must be provided with a minimum of 30 m³ of available soil volume, as determined by the Landscape Architect. The developer is to ensure that the soil is generally un-compacted when backfilling in street tree planting locations.
- ☐ The tree species must be small (mature tree height up to 7.5 m) to medium size (mature tree height 7.5 m to 14 m) as confirmed by the Landscape Architect.
- ☐ The foundation walls are to be reinforced at least nominally (minimum of two upper and two lower 15M bars in the foundation wall).
- ☐ Grading surround the tree must promote drainage to the tree root zone (in such a manner as not to be detrimental to the tree).

It is well documented in the literature, and is our experience, that fast-growing trees located near buildings founded on cohesive soils that shrink on drying can result in long-term differential settlements of the structures. Tree varieties that have the most pronounced effect on foundations are seen to consist of poplars, willows and some maples (i.e. Manitoba Maples) and, as such, they should not be considered in the landscaping design.

7.0 Recommendations

It is recommended that the following be completed once the master plan and site development are determined:

- ☐ Complete a supplemental geotechnical investigation to further evaluate the effect of the existing fill and further detail permissible grade raise restriction.
- ☐ Review detailed grading plan(s) from a geotechnical perspective.
- ☐ Review proposed changes to the existing slopes.
- ☐ Observation of all bearing surfaces prior to the placement of concrete.
- ☐ Periodic observation of the condition of unsupported excavation side slopes in excess of 3 m in height, if applicable.
- ☐ Observation of all subgrades prior to placing backfilling materials.
- ☐ Observation of clay seal placement at specified locations.
- ☐ Field density tests to ensure that the specified level of compaction has been achieved.
- ☐ Sampling and testing of the bituminous concrete including mix design reviews.

A report confirming that these works have been conducted in general accordance with Paterson's recommendations could be issued upon request, following the completion of a satisfactory material testing and observation program by the geotechnical consultant.

8.0 Statement of Limitations

The recommendations made in this report are in accordance with Paterson's present understanding of the project. Paterson requests permission to review the grading plan once available. Paterson's recommendations should be reviewed when the drawings and specifications are complete.

The client should be aware that any information pertaining to soils and the test hole log are furnished as a matter of general information only. Test hole descriptions or logs are not to be interpreted as descriptive of conditions at locations other than those of the test holes.

A soils investigation is a limited sampling of a site. Should any conditions at the site be encountered which differ from those at the test locations, Paterson requests to be notified immediately in order to permit reassessment of the recommendations.

The present report applies only to the project described in this document. Use of this report for purposes other than those described herein or by person(s) other than Claridge Homes (Gladstone) or their agent(s) is not authorized without review by this firm for the applicability of our recommendations to the altered use of the report.

Paterson Group Inc.



Joey R. Villeneuve, M.A.Sc., P.Eng.



David J. Gilbert, P.Eng.

Report Distribution:

- ☐ Claridge Homes (Gladstone)
- ☐ Paterson Group

APPENDIX 1

SOIL PROFILE AND TEST DATA SHEETS

BOREHOLE LOGS BY OTHERS

SYMBOLS AND TERMS

ATTERBERG LIMITS TESTING RESULT

DATUM Geodetic


REMARKS

BORINGS BY CME-55 Low Clearance Drill

DATE September 10, 2020

FILE NO. PG5224

HOLE NO. BH 1-20

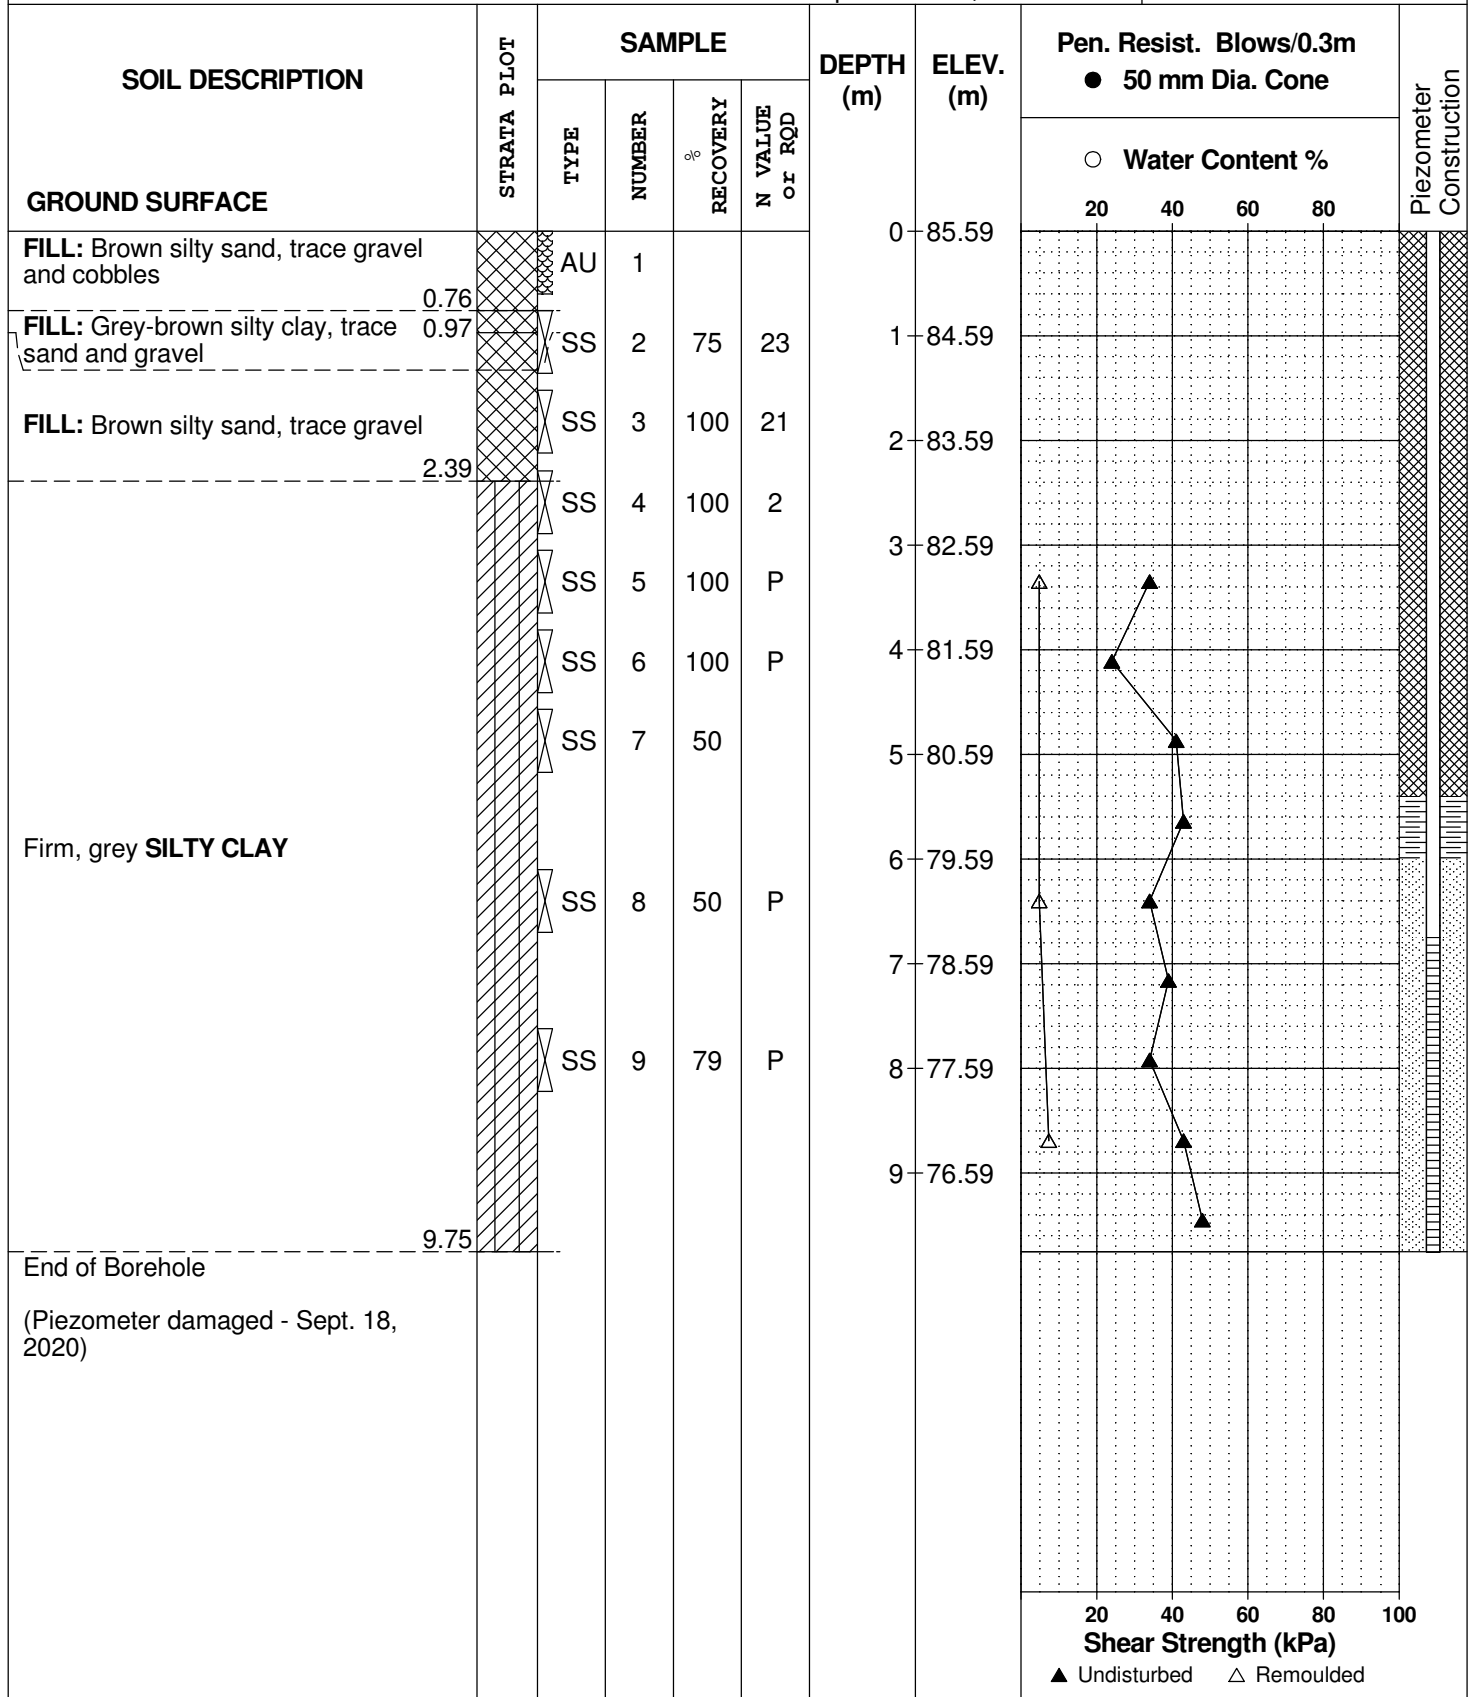

DATUM Geodetic

REMARKS

BORINGS BY CME-55 Low Clearance Drill


DATE September 10, 2020

FILE NO.

PG5224

HOLE NO.

BH 2-20

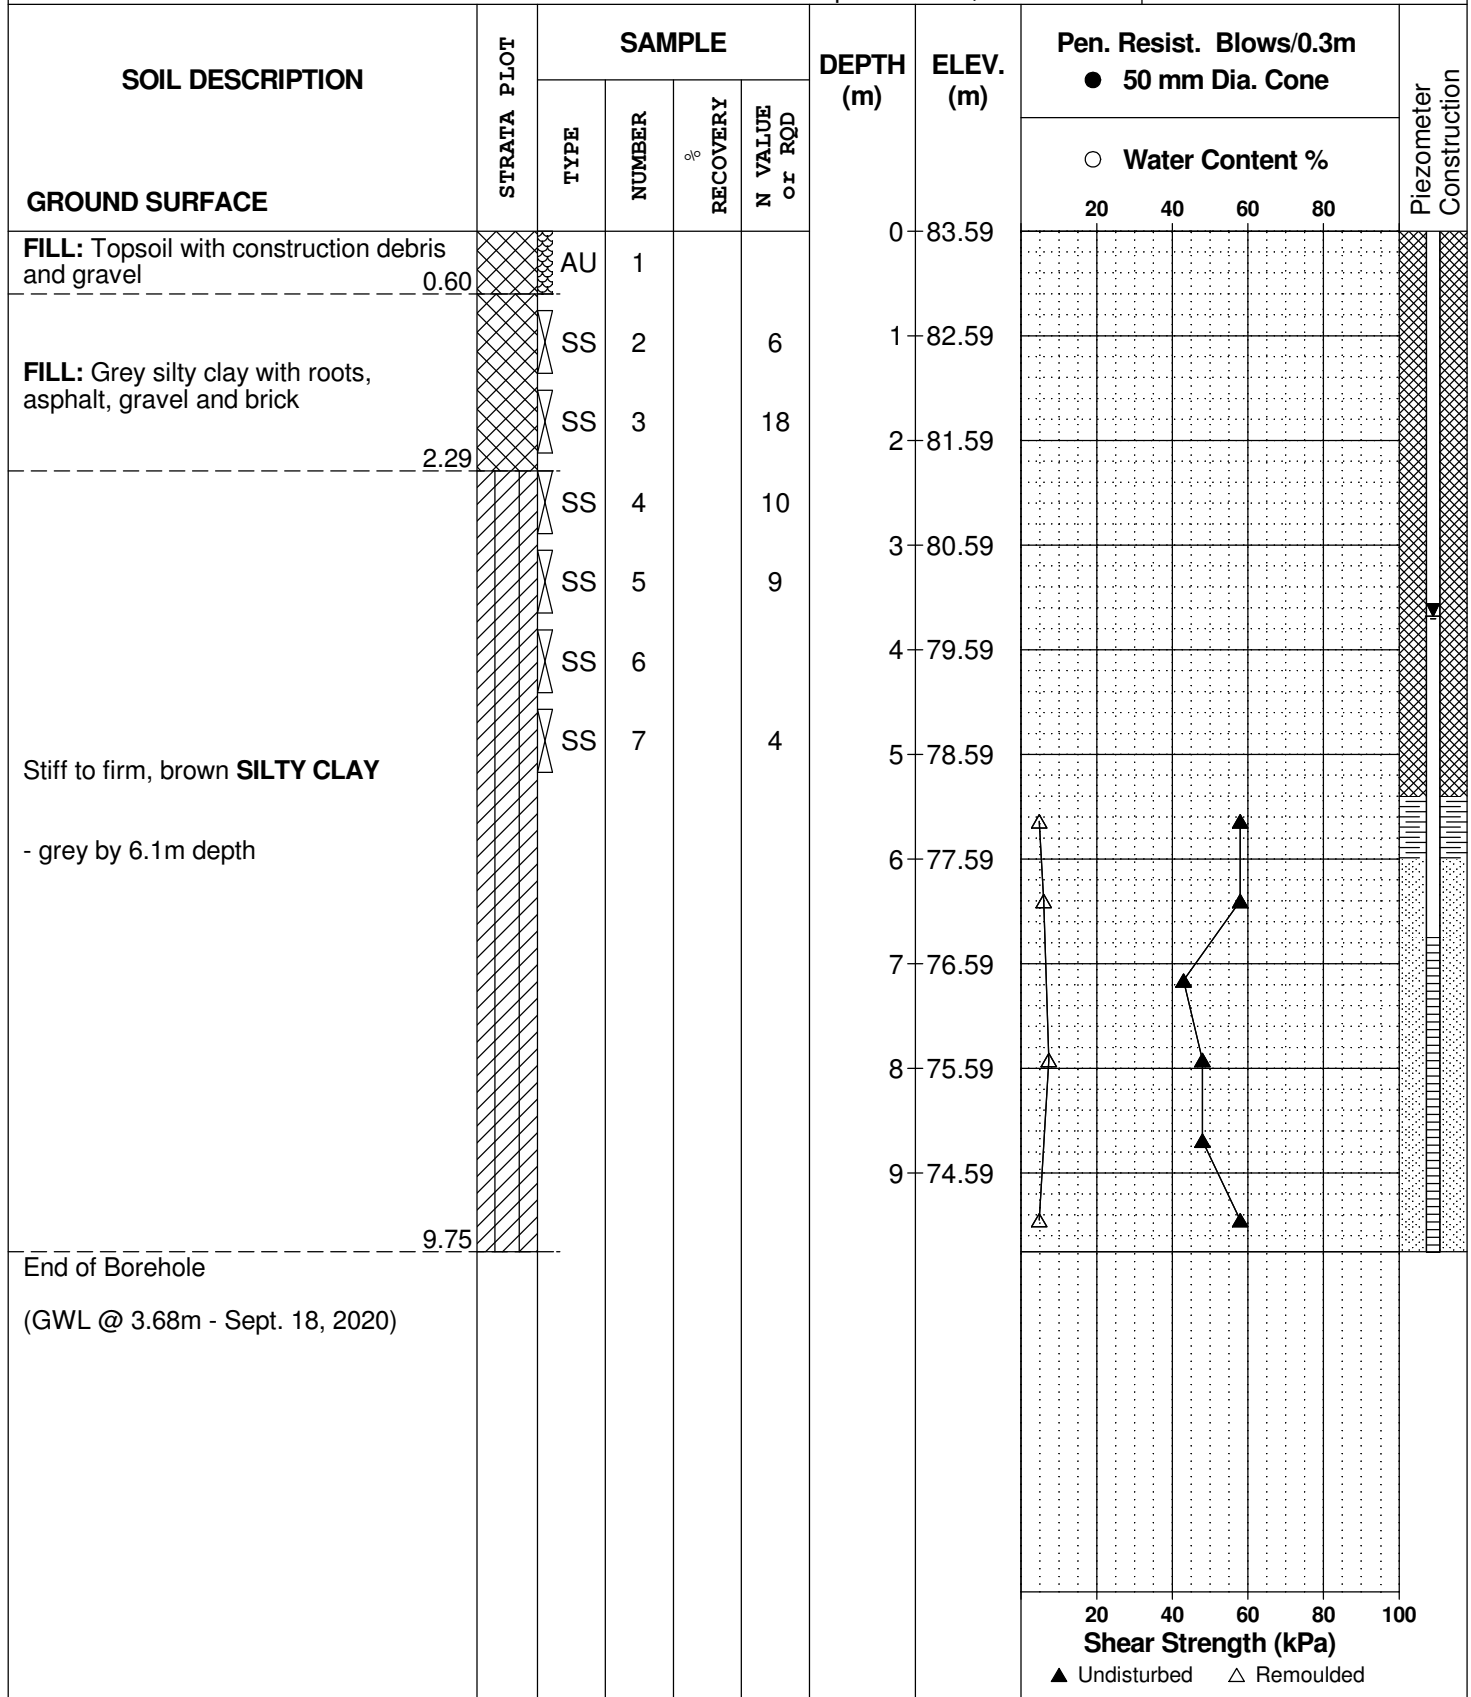

DATUM	Geodetic
-------	----------

FILE NO. PG5224

REMARKS

HOLE NO. **BH 3-20**

BORINGS BY CME-55 Low Clearance Drill

DATE September 10, 2020

[illegible]

DATUM Geodetic


REMARKS

BORINGS BY CME-55 Low Clearance Drill

DATE September 10, 2020

FILE NO. PG5224

HOLE NO. BH 4-20

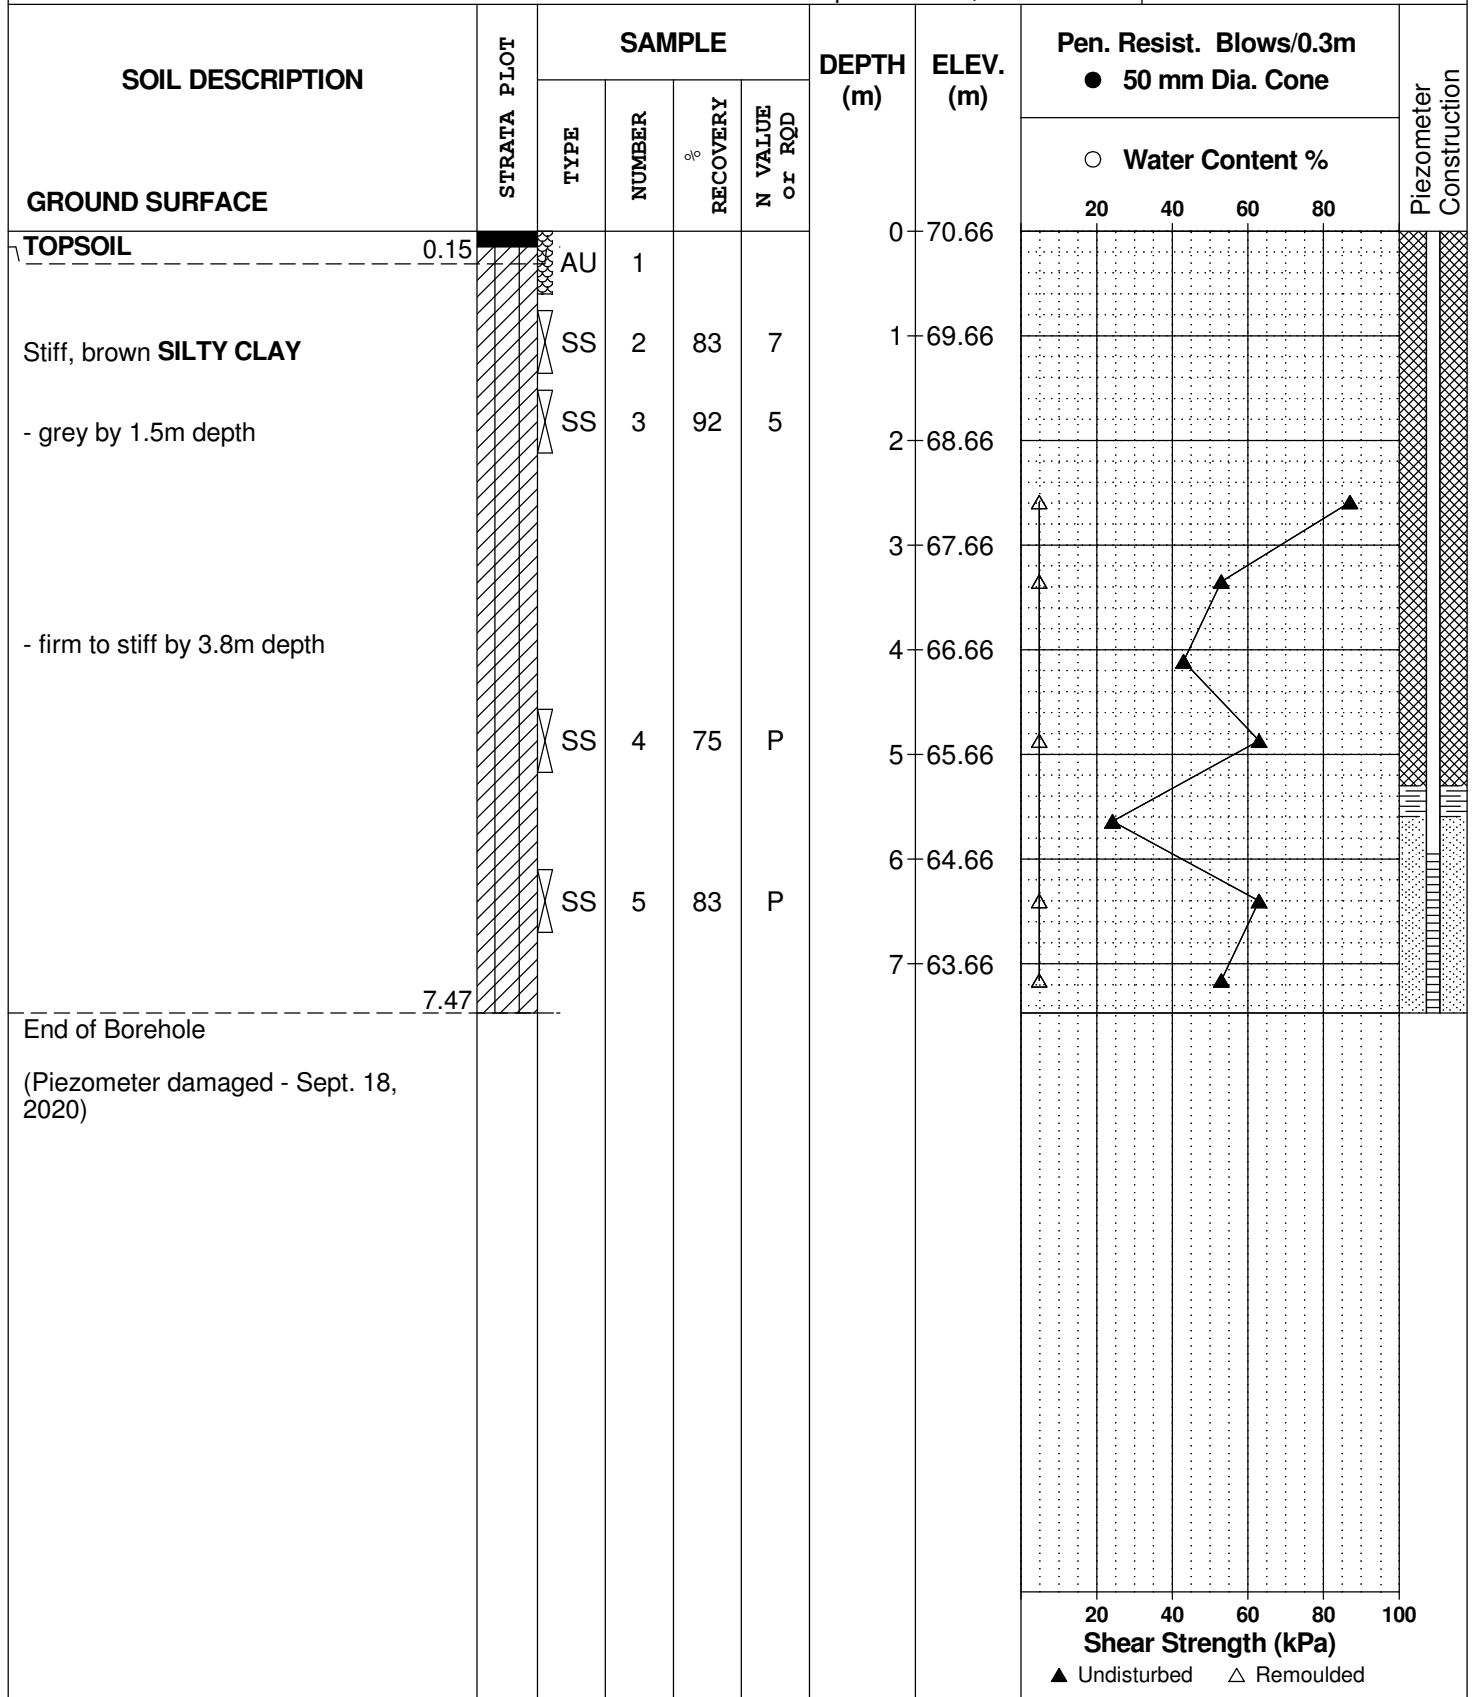

DATUM Geodetic


REMARKS

BORINGS BY CME-55 Low Clearance Drill

DATE September 11, 2020

FILE NO. PG5224

HOLE NO. BH 5-20

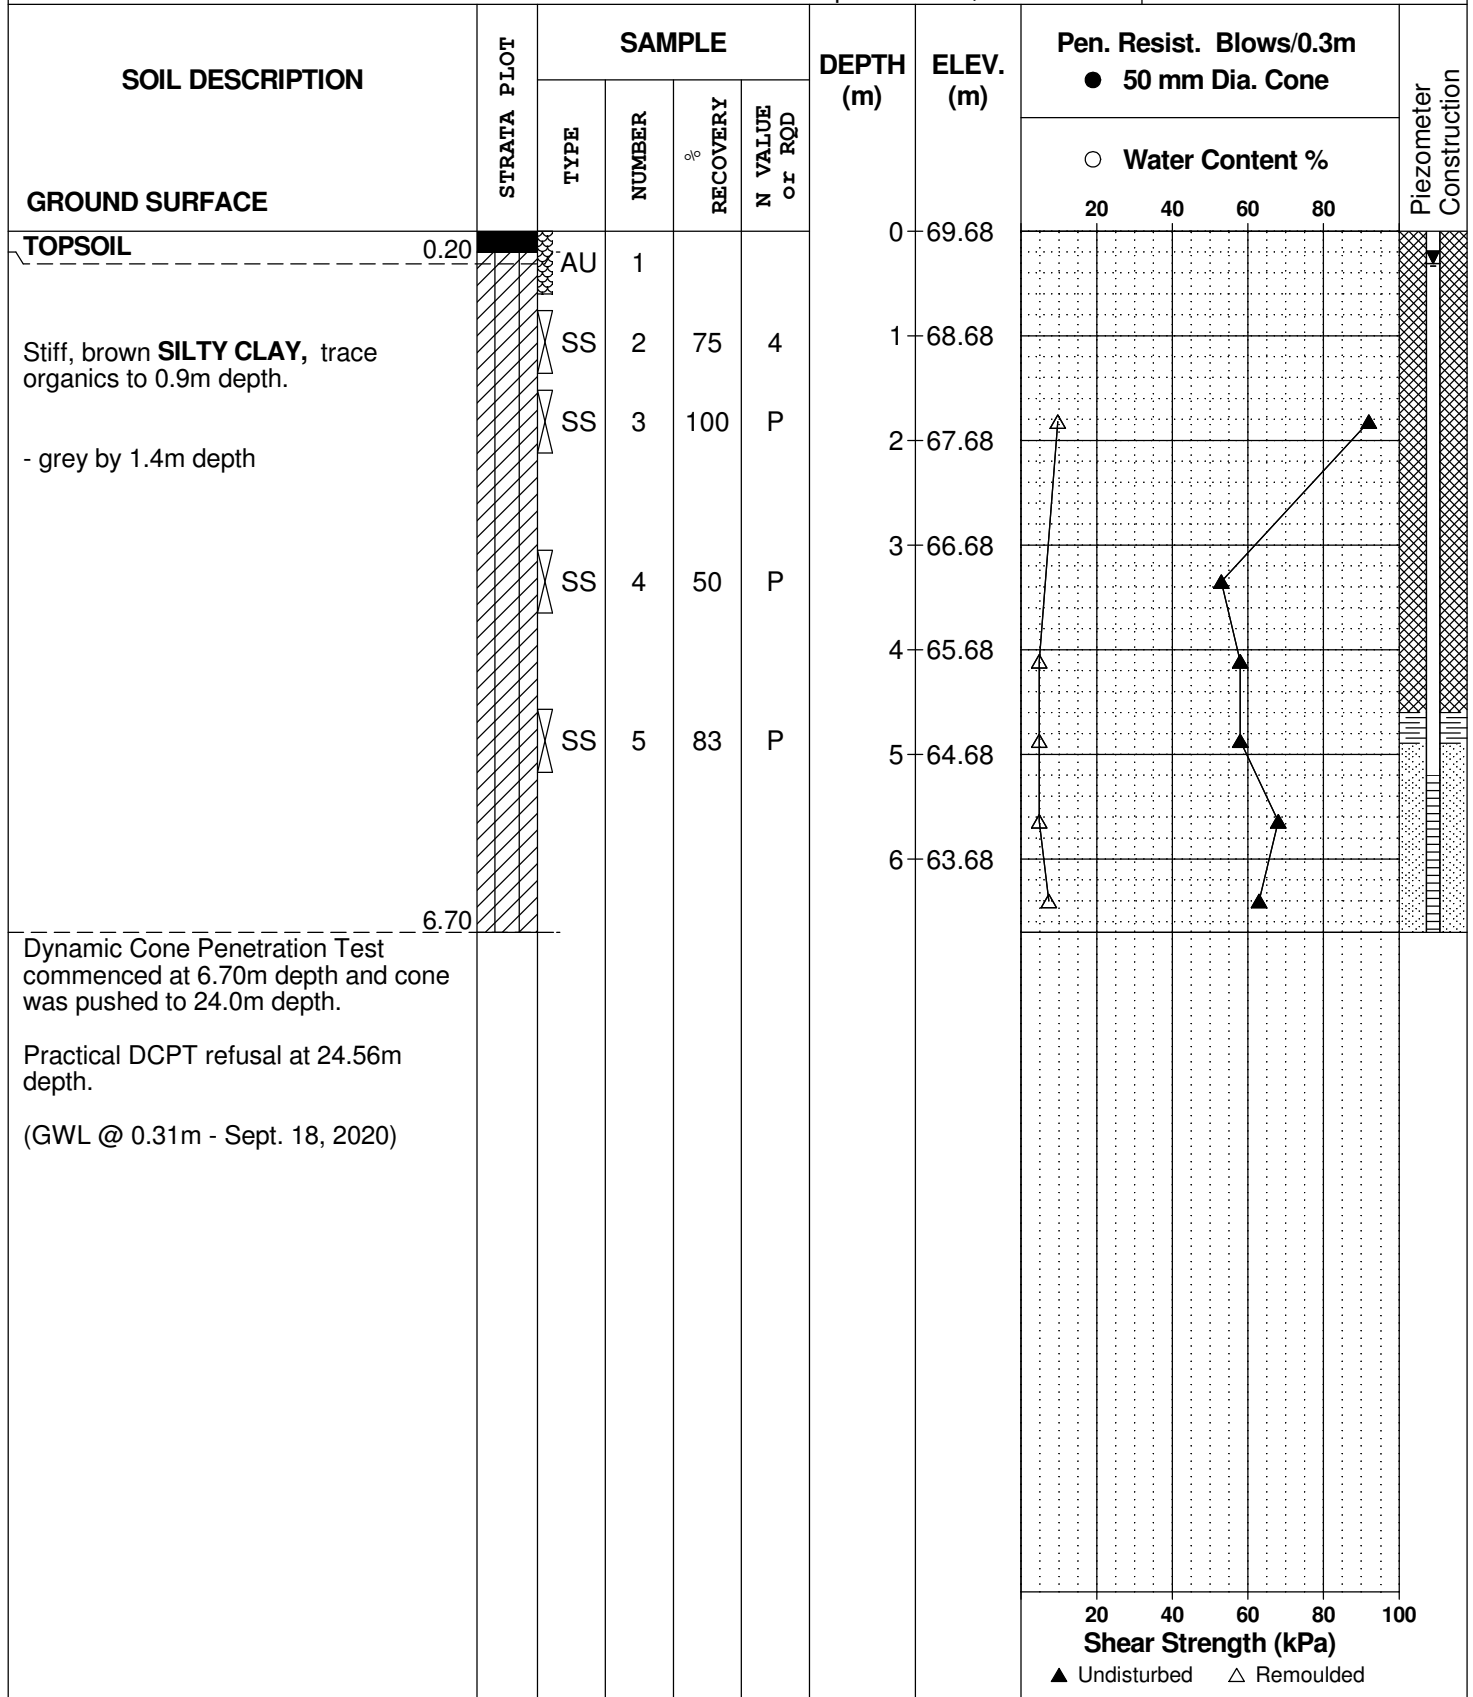

DATUM Geodetic

REMARKS

BORINGS BY CME-55 Low Clearance Drill


DATE September 11, 2020

FILE NO.

PG5224

HOLE NO.

BH 6-20

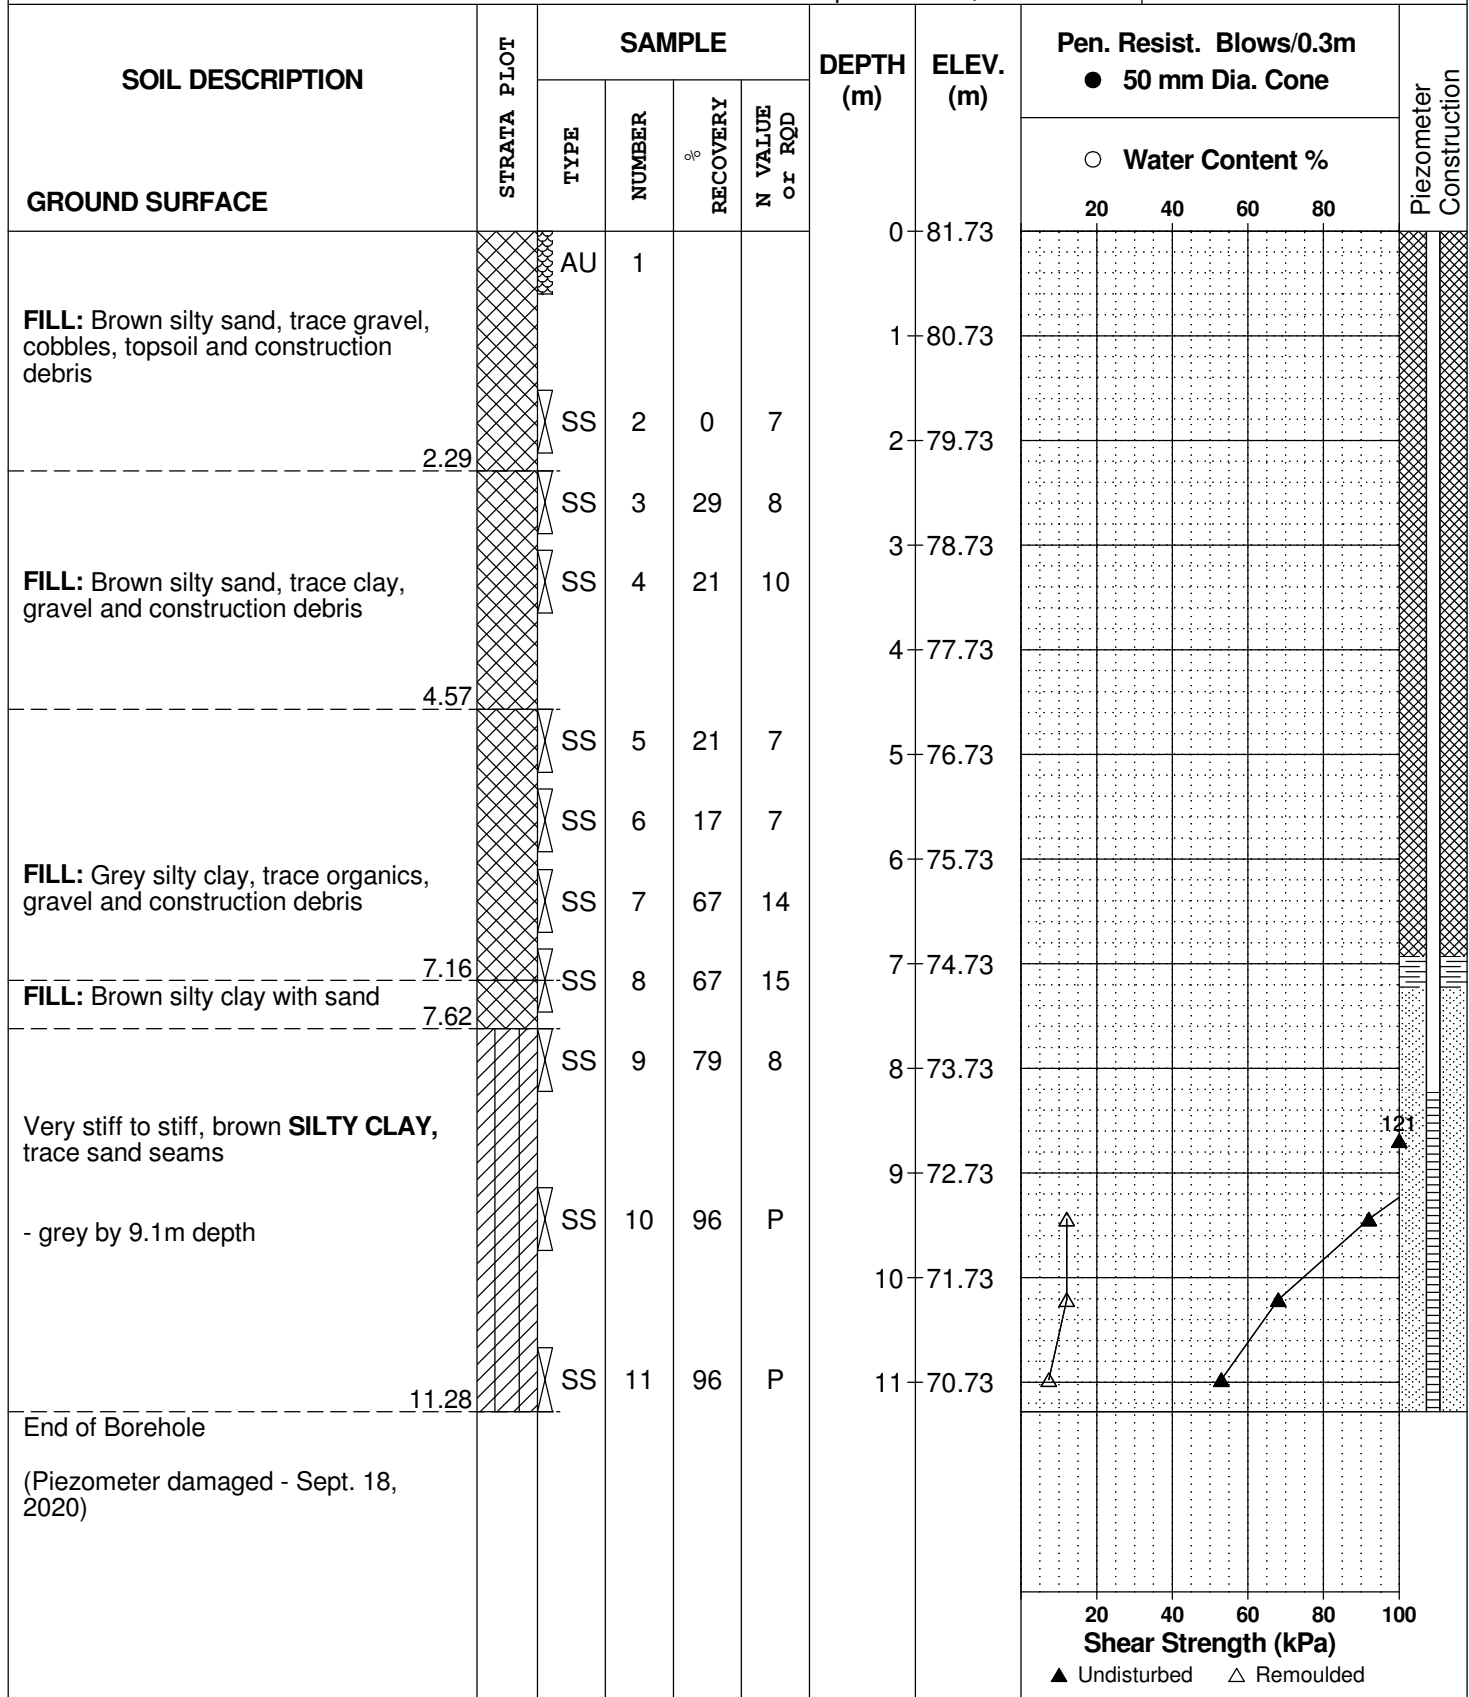

DATUM	Geodetic
-------	----------

FILE NO. PG5224

REMARKS

HOLE NO. **BH 1**

BORINGS BY CME 55 Power Auger

DATE 2019 May 16

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %				
								20	40	60	80	
GROUND SURFACE												
FILL: Brown silty sand with crushed stone and gravel ----- 0.51	[Pattern]	AU	1			0	85.78					
FILL: Brown silty clay, trace gravel ----- 1.37	[Pattern]	SS	2	33	14	1	84.78					
FILL: Brown silty sand ----- 2.59	[Pattern]	SS	3	75	6	2	83.78					
	[Pattern]	SS	4	100	6	3	82.78					
Brown SILTY CLAY - grey by 3.8m depth	[Pattern]	SS	5	100	4	4	81.78					
	[Pattern]	SS	6	100	4	5	80.78					
	[Pattern]	SS	7	100	1							
	[Pattern]	SS	8	100	W							
End of Borehole ----- 6.10 (GWL @ 1.60m - May 31, 2019)						6	79.78					

Shear Strength (kPa)

▲ Undisturbed △ Remoulded

DATUM	Geodetic
-------	----------

FILE NO. PG5224

REMARKS

HOLE NO. BH 2

BORINGS BY CME 55 Power Auger

DATE 2019 May 16

[illegible]

DATUM

FILE NO.

PG5224

REMARKS

HOLE NO.

BH 3

BORINGS BY CME 55 Power Auger

DATE 2019 May 16

[illegible]

DATUM

FILE NO.

PG5224

REMARKS

HOLE NO.

BH 4

BORINGS BY CME 55 Power Auger

DATE 2019 May 16

[illegible]

DATUM Geodetic


REMARKS

BORINGS BY CME 55 Power Auger

DATE 2019 May 17

FILE NO. PG5224

HOLE NO. BH 5

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction	
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %					
								20	40	60	80		
GROUND SURFACE						0	82.34						
FILL: Brown silty sand, some gravel and brick		AU	1										
		SS	2	33	8	1	81.34						
		SS	3	54	9	2	80.34						
		SS	4	29	14	3	79.34						
		SS	5	58	5	4	78.34						
		SS	6	42	15	5	77.34						
		SS	7	38	6	6	76.34						
		SS	8	12	5	7	75.34						
Brown SILTY CLAY - grey by 8.4m depth		SS	9	79	21	8	74.34						
		SS	10	100	15	9	73.34						
		SS	11	100	8	10	72.34						
		SS	12	88	4								
		SS	13	100	2								
		SS	14	100	1								
End of Borehole (GWL @ 5.95m - May 30, 2019)													
								Shear Strength (kPa)					
								20	40	60	80	100	
								▲ Undisturbed △ Remoulded					

DATUM

REMARKS

BORINGS BY CME 55 Power Auger

DATE 2019 May 17

FILE NO.

PG5224

HOLE NO.

BH 6

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction	
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %					
								20	40	60	80		
GROUND SURFACE							0						
FILL: Brown silty sand with gravel, some clay, trace brick and topsoil		AU	1				0						
		SS	2	58	16	1							
		SS	3	33	7	2							
		SS	4	71	7	3							
		SS	5	62	8	4							
		SS	6	75	22	5							
		SS	7	71	8	6							
		SS	8	67	20	7							
		SS	9	46	8	8							
	6.86					7							
Brown SILTY CLAY - grey by 8.4m depth		SS	10	88	15	9							
		SS	11	100	7	10							
		SS	12	100	5	11							
		SS	13	100	2	12							
		SS	14	100	W	13							
	10.67					10							
End of Borehole													
(GWL @ 5.20m - May 30, 2019)													

20 40 60 80 100
Shear Strength (kPa)
▲ Undisturbed △ Remoulded

DATUM	Geodetic
-------	----------

FILE NO. PG5224

REMARKS

HOLE NO. BH 7

BORINGS BY Portable Drill

DATE May 22, 2019

SOIL DESCRIPTION		STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction
			TYPE	NUMBER	% RECOVERY	N VALUE or RQD			○ Water Content %				
20	40	60					80						
GROUND SURFACE													
TOPSOIL	0.30		SS	1	100		0	73.97					
Brown SILTY CLAY	0.71		SS	2	100		1	72.97					
Brown SILTY CLAY			SS	3	100								
			SS	4	100		2	71.97					
			SS	5	100								
- grey by 1.8m depth	3.05						3	70.97					
End of Borehole													
(GWL @ 0.60m - June 3, 2019)													
		</											

DATUM	Geodetic
-------	----------

FILE NO. PG5224

REMARKS

HOLE NO. **BH 8**

BORINGS BY Portable Drill

DATE May 22, 2019

SOIL DESCRIPTION		STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction	
			TYPE	NUMBER	% RECOVERY	N VALUE or RQD			○ Water Content %					
GROUND SURFACE									20	40	60	80		
TOPSOIL	0.28		SS	1	12		0	71.09						
Grey SILTY SAND	0.91		SS	2	58		1	70.09						
Brown SILTY CLAY - grey by 1.5m depth	1.83		SS	3	100									
End of Borehole														
(GWL @ 0.05m - June 3, 2019)														

DATUM	Geodetic
-------	----------

FILE NO. PG5224

REMARKS

HOLE NO. **BH 9**

BORINGS BY Portable Drill

DATE 2019 May 22

[illegible]

DATUM	Geodetic
-------	----------

FILE NO. PG5224

REMARKS

HOLE NO. **BH10**

BORINGS BY CME 55 Power Auger

DATE 2019 September 5

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %				
GROUND SURFACE								20	40	60	80	
FILL: Brown silty clay, trace sand and gravel						0	86.03					
	0.81											
Compact to loose, brown SILTY SAND		SS	1	75	10	1	85.03					
		SS	2	88	24	2	84.03					
		SS	3	88	9							
Brown SILTY CLAY - grey by 3.3m depth		SS	4	100	2	3	83.03					
		SS	5	100	W	4	82.03					
		SS	6	100	W	5	81.03					
End of Borehole	5.18											
(GWL @ 1.92m - Sept. 9, 2019)												

Shear Strength (kPa)

▲ Undisturbed △ Remoulded

20 40 60 80 100

DATUM

REMARKS

BORINGS BY CME 55 Power Auger

DATE 2019 September 5

FILE NO.

PG5224

HOLE NO.

BH11

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %				
								20	40	60	80	
GROUND SURFACE						0						
OVERBURDEN						1						
						2						
						3						
						4						
						5						
Grey SILTY CLAY						6						
		SS	1	100	1	7						
		SS	2	100		8						
		SS	3	100		9						
		SS	4	100		10						
		SS	5	100		11						
		SS	6	100								
End of Borehole												
(GWL @ 2.84m - Sept. 9, 2019)												
												</

SOIL PROFILE AND TEST DATA

FILE NO. PG5224

HOLE NO. **BH12**

DATE 2019 September 5

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Monitoring Well Construction
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %				
GROUND SURFACE								20	40	60	80	
FILL: Brown silty sand with gravel Compact, grey SILTY SAND Brown to grey SILTY CLAY	1.27	SS	1	79	30	0	85.14					
		SS	2	75	12	1	84.14					
	2.11	SS	3	100	1	2	83.14					
		SS	4	100	W	3	82.14					
		SS	5	100	W	4	81.14					
	5.18	SS	6	100	W	5	80.14					
End of Borehole (GWL @ 3.66m - Sept. 9, 2019)												

DATUM

FILE NO.

PG5224

REMARKS

HOLE NO.

BH13

BORINGS BY CME 55 Power Auger

DATE 2019 September 5

[illegible]

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-1

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 12, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m										
								SHEAR STRENGTH Cu, kPa		nat V. + Q - rem V. ⊕ U - ○		WATER CONTENT PERCENT					
								20	40	60	80	10 ⁻⁶	10 ⁻⁵	10 ⁻⁴	10 ⁻³		
0		GROUND SURFACE		86.29													
	Power Auger 200 mm Diam. (Hollow Stem)	ASPHALTIC CONCRETE		0.02													
		FILL - Stone dust		0.42	1	AS	-										
		TOPSOIL - (SM) SILTY SAND; dark brown; non-cohesive		0.99													
		(SP) SAND; brown; non-cohesive, moist to wet, compact		0.30													
1																	
						2	SS	12									
						3	SS	12									
2																	
						4	SS	16									
3		(CI/CH) SILTY CLAY to CLAY; grey and red brown; cohesive, w>PL, soft		83.24 3.05	5	SS	WH										
4								+									
		(CI/CH) SILTY CLAY to CLAY; grey and red brown, with black mottling; cohesive, w>PL, firm		82.02 4.27				+									
								⊕	+								
5								+									
								⊕	+								
6								+									
					6	SS	WH										
7								+									
								+									
8								+									
								+									
		End of Borehole		78.06 8.23													
9																	
10																	

WL in open borehole at 2.13 m depth below ground surface upon completion of drilling

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-1A

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 12, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	SHEAR STRENGTH Cu, kPa		nat V. + Q - rem V. ⊕ U - ● ○		WATER CONTENT PERCENT Wp — W — Wi			
								20	40	60	80	10 ⁻⁶	10 ⁻⁵		
0	Power Auger 200 mm Diam. (Hollow Stem)	GROUND SURFACE		86.24											
		For soil descriptions refer to Record of Borehole 16-1		0.00											
1															
2															
3															
4		End of Borehole		82.43	1	TP	PH								
				3.81											
5															
6															
7															
8															
9															
10															

Native Backfill

Bentonite Seal

C Standpipe

WL in Standpipe at
Elev. 83.38 m on
Jan. 22, 2016

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-2A

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 12, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	SHEAR STRENGTH Cu, kPa		nat V. + Q - rem V. ⊕ U - ○		WATER CONTENT PERCENT Wp ——— W ——— WI					
								20	40	60	80	10 ⁻⁶	10 ⁻⁵			10 ⁻⁴	10 ⁻³
0	Power Auger 200 mm Diam. (Hollow Stem)	GROUND SURFACE		84.33													
		For soil descriptions refer to Record of Borehole 16-2		0.00													
1																	
2																	
3																	
					1	TP	PH							C			
4		End of Borehole		80.67 3.66													
5																	
6																	
7																	
8																	
9																	
10																	

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-3

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 12, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION									
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	SHEAR STRENGTH				WATER CONTENT PERCENT													
								20		40		60		80			10 ⁻⁶		10 ⁻⁵		10 ⁻⁴		10 ⁻³		
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - U - ●		Wp			W		Wi						
		GROUND SURFACE		81.01																					
0	Power Auger 200 mm Diam. (Hollow Stem)	FILL - (SP) SAND; dark brown, contains organic matter and wood; non-cohesive, moist to wet, very loose		0.00																					
				1	AS	-																			
1						2	SS	2																	
			TOPSOIL - (SM) SAND; brown; non-cohesive		79.49																				
			(SP) SAND; grey brown; wet, loose		1.52																				
					1.65																				
2			(CI/CH) SILTY CLAY to CLAY; grey brown to grey (WEATHERED CRUST); cohesive, w>PL, stiff		79.03	3	SS	8																	
						1.98																			
						4	SS	2																	
3		(CI/CH) SILTY CLAY to CLAY; grey and red brown, with black mottling; cohesive, w>PL, firm		78.11																					
					2.90																				
4																									
5																									

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-3A

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 12, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	SHEAR STRENGTH Cu, kPa		nat V. + Q - rem V. ⊕ U - ○		WATER CONTENT PERCENT Wp ——— W ——— WI			
								20	40	60	80	10 ⁻⁶	10 ⁻⁵		
0	Power Auger 200 mm Diam. (Hollow Stem)	GROUND SURFACE		81.01											
		For soil descriptions refer to Record of Borehole 16-3		0.00											
1															
2															
3															
4					1	TP	PH								
		End of Augerhole		76.74 4.27											
5															
6															
7															
8															
9															
10															

Native Backfill

Bentonite Seal

Standpipe

WL in Standpipe at
Elev. 78.50 m on
Jan. 22, 2016

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-4

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 13, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	20 40 60 80				10 ⁻⁶ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻³							
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - ● U - ○		WATER CONTENT PERCENT					
								20 40 60 80						Wp ——— W ——— WI					
		GROUND SURFACE		82.07 0.00															
0	Power Auger 200 mm Diam. (Hollow Stem)	FILL - (OL) ORGANIC SILT, trace gravel; dark brown, contains sand, clay, wood, and debris; non-cohesive, moist, loose																	
1																			
2																			
3																			
4																			
5		(CI/CH) SILTY CLAY to CLAY; grey brown and red brown, highly fissured (WEATHERED CRUST); cohesive, w>PL, very stiff to stiff		79.17 2.90															
6																			
7																			
8																			
9		End of Borehole		73.23 8.84															
10																			

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-5

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 13, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m												
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - ● U - ○		WATER CONTENT PERCENT					
								20	40	60	80	10 ⁻⁶	10 ⁻⁵	10 ⁻⁴	10 ⁻³			Wp ———— W ———— Wl	
								20	40	60	80	20	40	60	80				
0		GROUND SURFACE		72.24															
	Power Auger 200 mm Diam. (Hollow Stem)	TOPSOIL - (ML) CLAYEY SILT and sandy SILT; dark brown; non-cohesive (CI/CH) SILTY CLAY to CLAY; grey brown, highly fissured (WEATHERED CRUST); cohesive, w>PL, very stiff to stiff		0.00															
72.02																			
0.22																			
1					1	SS	6												
2					2	SS	6												
3					3	SS	2												
4				(CI/CH) SILTY CLAY to CLAY; grey and red brown, with black mottling; cohesive, w>PL, firm to stiff	68.89			⊕		+									
		3.35						+											
5					4	SS	PM												
6					5	SS	PM												
7							⊕		+										
8									+										
		End of Borehole		64.01					+										
				8.23															
9																	Open borehole dry upon completion of drilling		
10																			

Open borehole dry upon completion of drilling

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-6

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: January 14, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m												
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - ● U - ○		WATER CONTENT PERCENT					
								20	40	60	80	10 ⁻⁶	10 ⁻⁵	10 ⁻⁴	10 ⁻³			Wp — W — WI	
								20	40	60	80	20	40	60	80				
0		GROUND SURFACE		70.50															
	Power Auger 200 mm Diam. (Hollow Stem)	TOPSOIL - (SP) SAND; brown; non-cohesive		0.00															
		(CI/CH) SILTY CLAY to CLAY; grey brown, highly fissured (WEATHERED CRUST); cohesive, w>PL, very stiff to stiff		0.08															
1					1	SS	4												
2			(CI/CH) SILTY CLAY to CLAY; grey and red brown, with black mottling; cohesive, w>PL, firm to stiff		68.52														
					1.98														
								⊕		+									
										+									
3						3	TP	PH											
4							⊕		+										
									+										
5					4	SS	PM												
							⊕		+										
									+										
6																			
					5	SS	PM												
7							⊕			+									
										+									
										+									
8										+									
		End of Borehole		62.27						+									
				8.23															
9																	Open borehole dry upon completion of drilling		
10																			

Open borehole dry
upon completion of
drilling

DEPTH SCALE

1 : 50



LOGGED: PAH

CHECKED:

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-101

SHEET 1 OF 2

LOCATION: See Site Plan

BORING DATE: June 18, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	20 40 60 80				10 ⁻⁶ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻³							
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - ● U - ○		WATER CONTENT PERCENT					
								20 40 60 80						Wp — W — WI					
0		GROUND SURFACE		73.67															
	Power Auger 200 mm Diam. (Hollow Stem)	TOPSOIL		0.00															
		(CI/CH) SILTY CLAY to CLAY; grey brown, contains rootlets (WEATHERED CRUST); cohesive, w>PL, very stiff to stiff		73.34															
				0.33															
1				1	SS	5													
2		2	SS	4															
3		3	SS	1															
			(CI/CH) SILTY CLAY to CLAY; grey; cohesive, w>PL, firm to stiff		70.62														
		3.05																	
		4			SS	WH													
4							⊕		+										
							⊕		+										
5					5	SS	WH												
									+										
									+										
6																			
					6	SS	WH												
7								⊕		+									
										+									
8					7	TP	PH												
								⊕		+									
9								⊕		+									
					8	SS	WH												
10		CONTINUED NEXT PAGE																	

DEPTH SCALE

1 : 50



LOGGED: JB

CHECKED: TMS

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-101

SHEET 2 OF 2

LOCATION: See Site Plan

BORING DATE: June 18, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION				
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m													
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - ● U - ○		WATER CONTENT PERCENT						
								20	40	60	80	10 ⁻⁶	10 ⁻⁵	10 ⁻⁴				10 ⁻³	Wp	W
								20	40	60	80	20	40	60	80					
10	Power Auger 200 mm Diam. (Hollow Stem)	--- CONTINUED FROM PREVIOUS PAGE ---						⊕		+										
		(CI/CH) SILTY CLAY to CLAY; grey; cohesive, w>PL, firm to stiff						⊕		+										
11					9	SS	WH													
											+									
12											+									
					10	SS	WH													
13								⊕		+										
										+										
14					11	TP	PH													
					12	SS	-	⊕		+										
15		End of Borehole		58.73 14.94				⊕		+										
16																				
17																				
18																				
19																				
20																				

Cuttings

Bentonite Seal

Silica Sand

Standpipe

W.L. in Standpipe
at 0.53 m above
ground surface on
August 24, 2016

DEPTH SCALE

1 : 50



LOGGED: JB

CHECKED: TMS

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-102

SHEET 1 OF 2

LOCATION: See Site Plan

BORING DATE: June 18, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	20 40 60 80				10 ⁻⁶ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻³							
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - ● U - ○		WATER CONTENT PERCENT					
								20 40 60 80						Wp W WI 20 40 60 80					
0		GROUND SURFACE		73.91															
	Power Auger 200 mm Diam. (Hollow Stem)	TOPSOIL		0.00															
				73.63															
		(SM) SILTY SAND; grey brown; non-cohesive, moist		0.28															
				73.15															
1		(CI/CH) SILTY CLAY to CLAY; grey brown, contains rootlets (WEATHERED CRUST); cohesive, w>PL, stiff to very stiff		0.76	1	SS	5												
2					2	SS	4												
				3	SS	1													
3		(CI/CH) SILTY CLAY; grey; cohesive, w>PL, firm to stiff		70.86															
				3.05	4	SS	WH												
4							⊕		+										
							⊕		+										
5					5	SS	WH												
							⊕		+										
							⊕		+										
6																			
					6	SS	WH												
7							⊕		+										
							⊕		+										
8					7	TP	PH												
							⊕		+										
							⊕		+										
9																			
					8	TP	PH												
10					9	SS	-												
		CONTINUED NEXT PAGE																	

CONTINUED NEXT PAGE

DEPTH SCALE

1 : 50



LOGGED: JB

CHECKED: TMS

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-102

SHEET 2 OF 2

LOCATION: See Site Plan

BORING DATE: June 18, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m	20	40	60	80	10 ⁻⁶	10 ⁻⁵	10 ⁻⁴	10 ⁻³				
								SHEAR STRENGTH Cu, kPa		nat V. rem V.	+ ⊕	Q - U -	● ○	WATER CONTENT PERCENT					
														Wp	W			Wi	
							20	40	60	80	20	40	60	80					
10		--- CONTINUED FROM PREVIOUS PAGE --- (CI/CH) SILTY CLAY; grey; cohesive, w>PL, firm to stiff		63.55	9	SS	-	⊕		+									
		End of Borehole		10.36				⊕		+									
11																			
12																			
13																			
14																			
15																			
16																			
17																			
18																			
19																			
20																			

DEPTH SCALE

1 : 50



LOGGED: JB

CHECKED: TMS

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 07-1121-0232-7000

RECORD OF BOREHOLE: 16-103

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: June 18, 2016

DATUM:

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES			DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.30m												
								SHEAR STRENGTH Cu, kPa		nat V. + rem V. ⊕		Q - ● U - ○		WATER CONTENT PERCENT					
								20	40	60	80	10 ⁻⁶	10 ⁻⁵	10 ⁻⁴	10 ⁻³			Wp —○— W WI	
								20	40	60	80	20	40	60	80				
0		GROUND SURFACE		71.00															
	Power Auger 200 mm Diam. (Hollow Stem)	TOPSOIL		0.00															
		(SM) SILTY SAND; brown grey; non-cohesive, moist		70.77 0.23															
		(CI/CH) SILTY CLAY to CLAY; grey brown, contains rootlets (WEATHERED CRUST); cohesive, w>PL		70.39 0.61															
1					1	SS	4												
2					2	SS	WH												
			(CI/CH) SILTY CLAY to CLAY; grey; cohesive, w>PL, firm to stiff		68.87 2.13				⊕	+									
									⊕	+									
3																			
					3	SS	WH												
4								⊕	+										
								⊕	+										
5					4	SS	WH												
								⊕	+										
								⊕	+										
6																			
					5	SS	WH												
7								⊕	+										
								⊕	+										
8																			
					6	SS	WH												
								⊕	+										
								⊕	+										
9		End of Borehole		62.16 8.84				⊕	+										
10																			

DEPTH SCALE

1 : 50



LOGGED: JB

CHECKED: TMS

MIS-BHS 001 07-1121-0232.GPJ GAL-MIS.GDT 08/31/16 JM

PROJECT: 05-1120-041

RECORD OF BOREHOLE: 05-3

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: May 10, 2005

DATUM: Geodetic

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa				WATER CONTENT PERCENT					
								nat V. + Q - ● rem V. ⊕ U - ○				10 ⁻⁶ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻³					
								20 40 60 80				Wp — W — Wi 20 40 60 80					
0		GROUND SURFACE		69.86													
		Brown sandy TOPSOIL		0.00													
		Very stiff grey brown SILTY CLAY, trace red brown layer (Weathered Crust)		69.65													
				0.21													
1					1	50 DO	7										
					2	50 DO	1										
2				67.73													
		Firm grey SILTY CLAY, trace red brown layer, trace black organic matter		2.13													
					3	73 TP	PH		+								
3					4	50 DO	PM		+								
									+								
4									+								
									+								
5					5	50 DO	PM										
									+								
6		End of Borehole		64.07					+								
				5.79													
7																	
8																	
9																	
10																	

DEPTH SCALE

1:50



LOGGED: K.S.L.

CHECKED: T.M.S.

BOREHOLE 05-1120-041.GPJ GLDR CAN GDT 8/12/05

PROJECT: 05-1120-041

RECORD OF BOREHOLE: 05-11

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: May 12, 2005

DATUM: Geodetic

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE			SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION	
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa				WATER CONTENT PERCENT					
								20	40	60	80	10 ⁻⁶	10 ⁻⁵	10 ⁻⁴			10 ⁻³
								20	40	60	80						
0		GROUND SURFACE		82.13													
		Brown silty clay, trace gravel and organic matter (FILL)		0.00													
		Grey brown crushed stone (FILL)		81.70													
				0.43													
		Brown silty clay, trace organic matter (FILL)		81.40													
				0.73													
1		Brown fine SAND		81.22													
		Very stiff to stiff grey brown SILTY CLAY, occasional red brown layer (Weathered Crust)		0.91	1	50 DO	12										
				1.04													
2					2	50 DO	7										
3					3	50 DO	7										
4					4	50 DO	5										
5					5	50 DO	WH										
		Firm to stiff grey SILTY CLAY		77.71													
				4.42													
6		End of Borehole		76.34													
				5.79													
7																	
8																	
9																	
10																	

DEPTH SCALE

1:50



LOGGED: D.J.S.

CHECKED: T.M.S.

BOREHOLE 05-1120-041.GPJ GLDR CAN GDT 8/12/05

PROJECT: 05-1120-041

RECORD OF BOREHOLE: 05-12

SHEET 1 OF 1

LOCATION: See Site Plan

BORING DATE: May 11, 2005

DATUM: Geodetic

SAMPLER HAMMER, 64kg; DROP, 760mm

PENETRATION TEST HAMMER, 64kg; DROP, 760mm

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa				WATER CONTENT PERCENT					
								20	40	60	80	10 ⁻⁶	10 ⁻⁵			10 ⁻⁴	10 ⁻³
								nat V. $\oplus$	rem V. $\ominus$	Q - $\bullet$	U - $\circ$	Wp $\leftarrow$ $\bigcirc$ $\rightarrow$ Wi					
								20	40	60	80	20	40	60	80		
0	Power Auger 200mm Diam. (Hollow Stem)	GROUND SURFACE		86.34													
		Dark brown sandy TOPSOIL		0.00													Bentonite Seal
		Yellow brown SILTY fine SAND		0.21													Native Backfill
		Loose to compact brown to grey stratified fine SAND, trace silt		0.37													Bentonite Seal
1					1	50 DO	11										
2					2	50 DO	13										Native Backfill
3					3	50 DO	11										Standpipe
4		Soft to firm grey SILTY CLAY, occasional red brown layer		82.09 3.35	4	50 DO	6									Silica Sand	
								$\oplus$	+							Bentonite Seal	
								$\oplus$	+								
5					5	73 TP	PH									C Native Backfill	
								$\oplus$	+								
6		End of Borehole		80.55 5.76				$\oplus$	+								
7																	
8																	
9																	
10																	

Water level in standpipe at elev 84.76m on July 11, 2005

Water level in
standpipe at elev
84.76m on July 11,
2005

DEPTH SCALE

1:50



LOGGED: D.J.S.

CHECKED: T.M.S.

MIS-BHS 001 05-1120-041 GPJ GAL-MIS GDT 06/23/11

SYMBOLS AND TERMS

SOIL DESCRIPTION

Behavioural properties, such as structure and strength, take precedence over particle gradation in describing soils. Terminology describing soil structure are as follows:

Desiccated	-	having visible signs of weathering by oxidation of clay minerals, shrinkage cracks, etc.
Fissured	-	having cracks, and hence a blocky structure.
Varved	-	composed of regular alternating layers of silt and clay.
Stratified	-	composed of alternating layers of different soil types, e.g. silt and sand or silt and clay.
Well-Graded	-	Having wide range in grain sizes and substantial amounts of all intermediate particle sizes (see Grain Size Distribution).
Uniformly-Graded	-	Predominantly of one grain size (see Grain Size Distribution).

The standard terminology to describe the relative strength of cohesionless soils is the compactness condition, usually inferred from the results of the Standard Penetration Test (SPT) 'N' value. The SPT N value is the number of blows of a 63.5 kg hammer, falling 760 mm, required to drive a 51 mm O.D. split spoon sampler 300 mm into the soil after an initial penetration of 150 mm. An SPT N value of "P" denotes that the split-spoon sampler was pushed 300 mm into the soil without the use of a falling hammer.

Compactness Condition	'N' Value	Relative Density %
Very Loose	<4	<15
Loose	4-10	15-35
Compact	10-30	35-65
Dense	30-50	65-85
Very Dense	>50	>85

The standard terminology to describe the strength of cohesive soils is the consistency, which is based on the undisturbed undrained shear strength as measured by the in situ or laboratory shear vane tests, unconfined compression tests, or occasionally by the Standard Penetration Test (SPT). Note that the typical correlations of undrained shear strength to SPT N value (tabulated below) tend to underestimate the consistency for sensitive silty clays, so Paterson reviews the applicable split spoon samples in the laboratory to provide a more representative consistency value based on tactile examination.

Consistency	Undrained Shear Strength (kPa)	'N' Value
Very Soft	<12	<2
Soft	12-25	2-4
Firm	25-50	4-8
Stiff	50-100	8-15
Very Stiff	100-200	15-30
Hard	>200	>30

SYMBOLS AND TERMS (continued)

SOIL DESCRIPTION (continued)

Cohesive soils can also be classified according to their “sensitivity”. The sensitivity, S_t , is the ratio between the undisturbed undrained shear strength and the remoulded undrained shear strength of the soil. The classes of sensitivity may be defined as follows:

Low Sensitivity:	$S_t < 2$
Medium Sensitivity:	$2 < S_t < 4$
Sensitive:	$4 < S_t < 8$
Extra Sensitive:	$8 < S_t < 16$
Quick Clay:	$S_t > 16$

ROCK DESCRIPTION

The structural description of the bedrock mass is based on the Rock Quality Designation (RQD).

The RQD classification is based on a modified core recovery percentage in which all pieces of sound core over 100 mm long are counted as recovery. The smaller pieces are considered to be a result of closely-spaced discontinuities (resulting from shearing, jointing, faulting, or weathering) in the rock mass and are not counted. RQD is ideally determined from NQ or larger size core. However, it can be used on smaller core sizes, such as BQ, if the bulk of the fractures caused by drilling stresses (called “mechanical breaks”) are easily distinguishable from the normal in situ fractures.

RQD %	ROCK QUALITY
90-100	Excellent, intact, very sound
75-90	Good, massive, moderately jointed or sound
50-75	Fair, blocky and seamy, fractured
25-50	Poor, shattered and very seamy or blocky, severely fractured
0-25	Very poor, crushed, very severely fractured

SAMPLE TYPES

SS	-	Split spoon sample (obtained in conjunction with the performing of the Standard Penetration Test (SPT))
TW	-	Thin wall tube or Shelby tube, generally recovered using a piston sampler
G	-	"Grab" sample from test pit or surface materials
AU	-	Auger sample or bulk sample
WS	-	Wash sample
RC	-	Rock core sample (Core bit size BQ, NQ, HQ, etc.). Rock core samples are obtained with the use of standard diamond drilling bits.

SYMBOLS AND TERMS (continued)

PLASTICITY LIMITS AND GRAIN SIZE DISTRIBUTION

WC%	-	Natural water content or water content of sample, %
LL	-	Liquid Limit, % (water content above which soil behaves as a liquid)
PL	-	Plastic Limit, % (water content above which soil behaves plastically)
PI	-	Plasticity Index, % (difference between LL and PL)
Dxx	-	Grain size at which xx% of the soil, by weight, is of finer grain sizes These grain size descriptions are not used below 0.075 mm grain size
D10	-	Grain size at which 10% of the soil is finer (effective grain size)
D60	-	Grain size at which 60% of the soil is finer
Cc	-	Concavity coefficient = $(D_{30})^2 / (D_{10} \times D_{60})$
Cu	-	Uniformity coefficient = D_{60} / D_{10}

Cc and Cu are used to assess the grading of sands and gravels:

Well-graded gravels have: $1 < Cc < 3$ and $Cu > 4$

Well-graded sands have: $1 < Cc < 3$ and $Cu > 6$

Sands and gravels not meeting the above requirements are poorly-graded or uniformly-graded.

Cc and Cu are not applicable for the description of soils with more than 10% silt and clay
(more than 10% finer than 0.075 mm or the #200 sieve)

CONSOLIDATION TEST


p'_o	-	Present effective overburden pressure at sample depth
p'_c	-	Preconsolidation pressure of (maximum past pressure on) sample
Ccr	-	Recompression index (in effect at pressures below p'_c)
Cc	-	Compression index (in effect at pressures above p'_c)
OC Ratio		Overconsolidation ratio = p'_c / p'_o
Void Ratio		Initial sample void ratio = volume of voids / volume of solids
Wo	-	Initial water content (at start of consolidation test)

PERMEABILITY TEST

k	-	Coefficient of permeability or hydraulic conductivity is a measure of the ability of water to flow through the sample. The value of k is measured at a specified unit weight for (remoulded) cohesionless soil samples, because its value will vary with the unit weight or density of the sample during the test.
---	---	--

SYMBOLS AND TERMS (continued)


STRATA PLOT




Topsoil




Asphalt




Fill




Peat




Sand




Silty Sand




Silt




Sandy Silt



Clay




Silty Clay




Clayey Silty Sand



Glacial Till




Shale




Bedrock


MONITORING WELL AND PIEZOMETER CONSTRUCTION

MONITORING WELL CONSTRUCTION

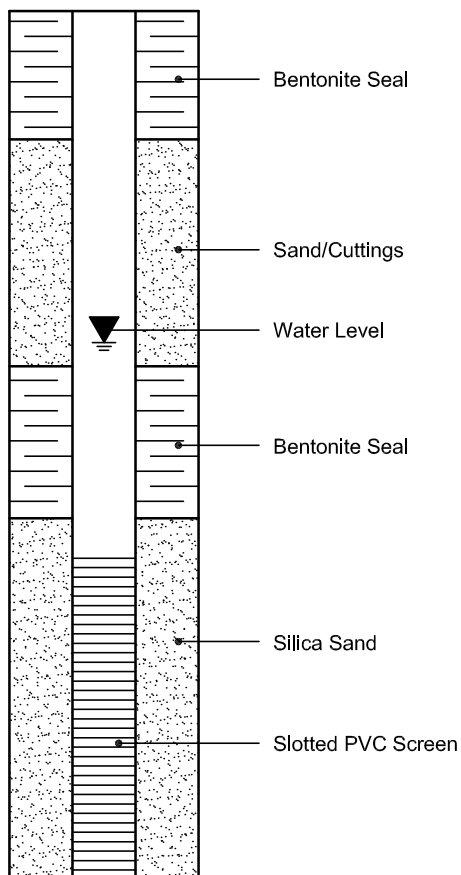

PIEZOMETER CONSTRUCTION

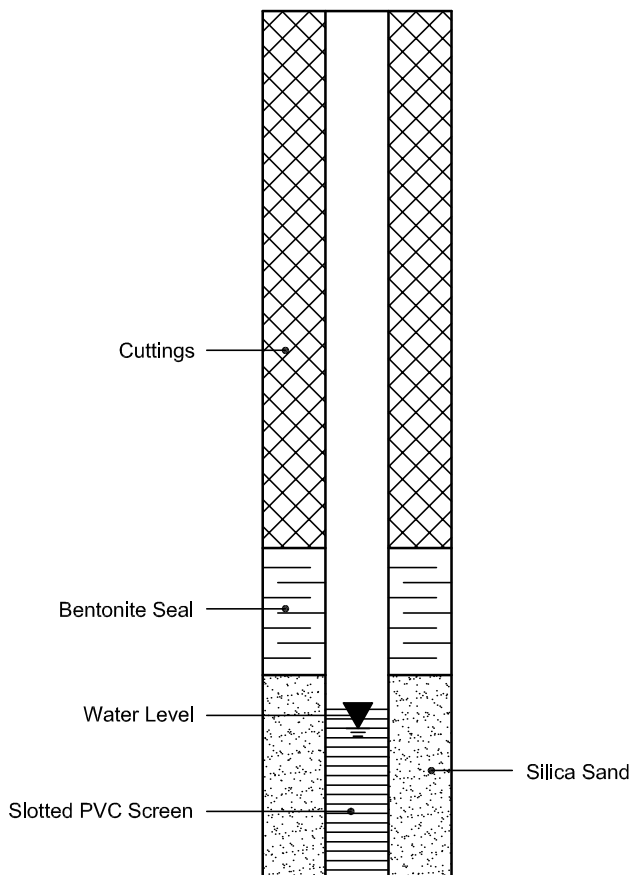

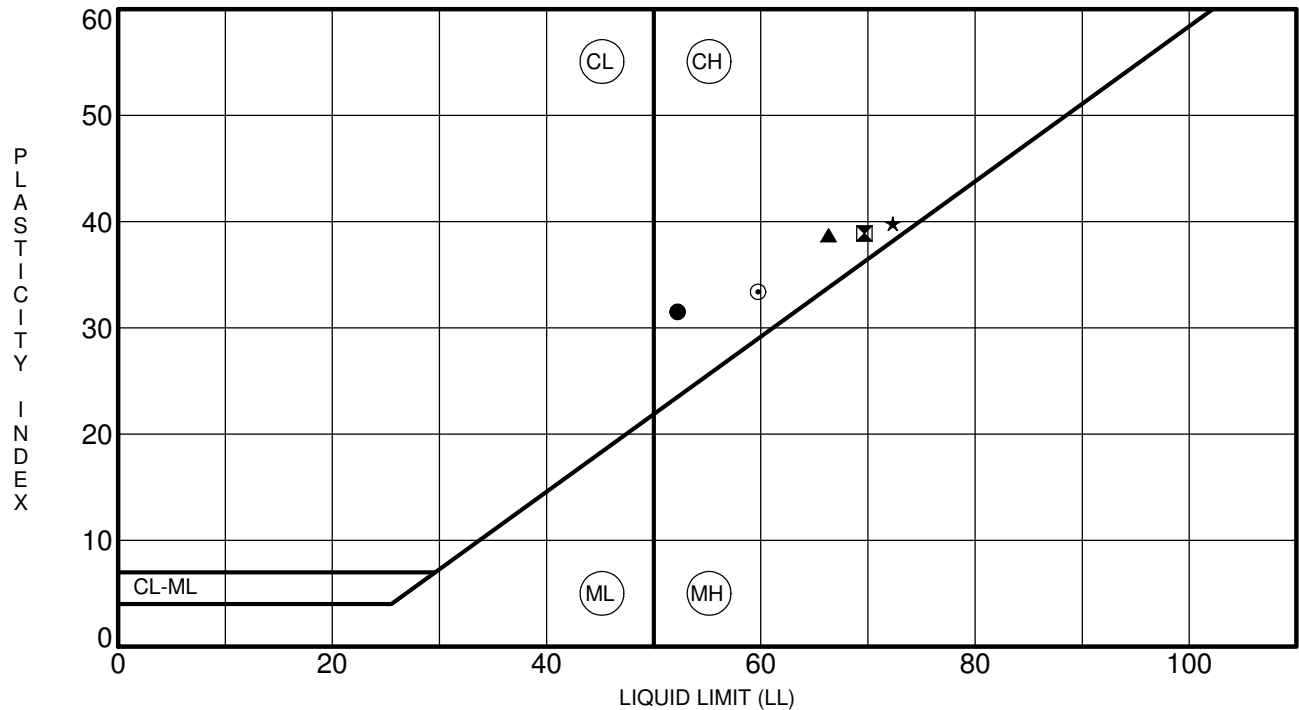

Specimen Identification	LL	PL	PI	Fines	Classification
● BH 2-20 SS 4	52	21	32		CH - Inorganic clays of high plasticity
⊠ BH 3-20 SS 4	70	31	39		CH - Inorganic clays of high plasticity
▲ BH 4-20 SS 3	66	28	39		CH - Inorganic clays of high plasticity
★ BH 5-20 SS 2	72	32	40		CH - Inorganic clays of high plasticity
⊙ BH 6-20 SS10	60	26	33		CH - Inorganic clays of high plasticity

CLIENT Claridge Homes

PROJECT Geotechnical Investigation - 3252 Navan Road

FILE NO. PG5224

DATE 11 Sep 20

patersongroup Consulting Engineers

154 Colonnade Road South, Ottawa, Ontario K2E 7J5

ATTERBERG LIMITS' RESULTS

APPENDIX 2

FIGURE 1 - KEY PLAN

FIGURE 2A - 7B - SLOPE STABILITY CROSS SECTIONS

PHOTOGRAPHS FROM SITE VISIT

DRAWING PG5224-1 - TEST HOLE LOCATION PLAN

DRAWING PG5224-2 - PERMISSIBLE GRADE RAISE PLAN

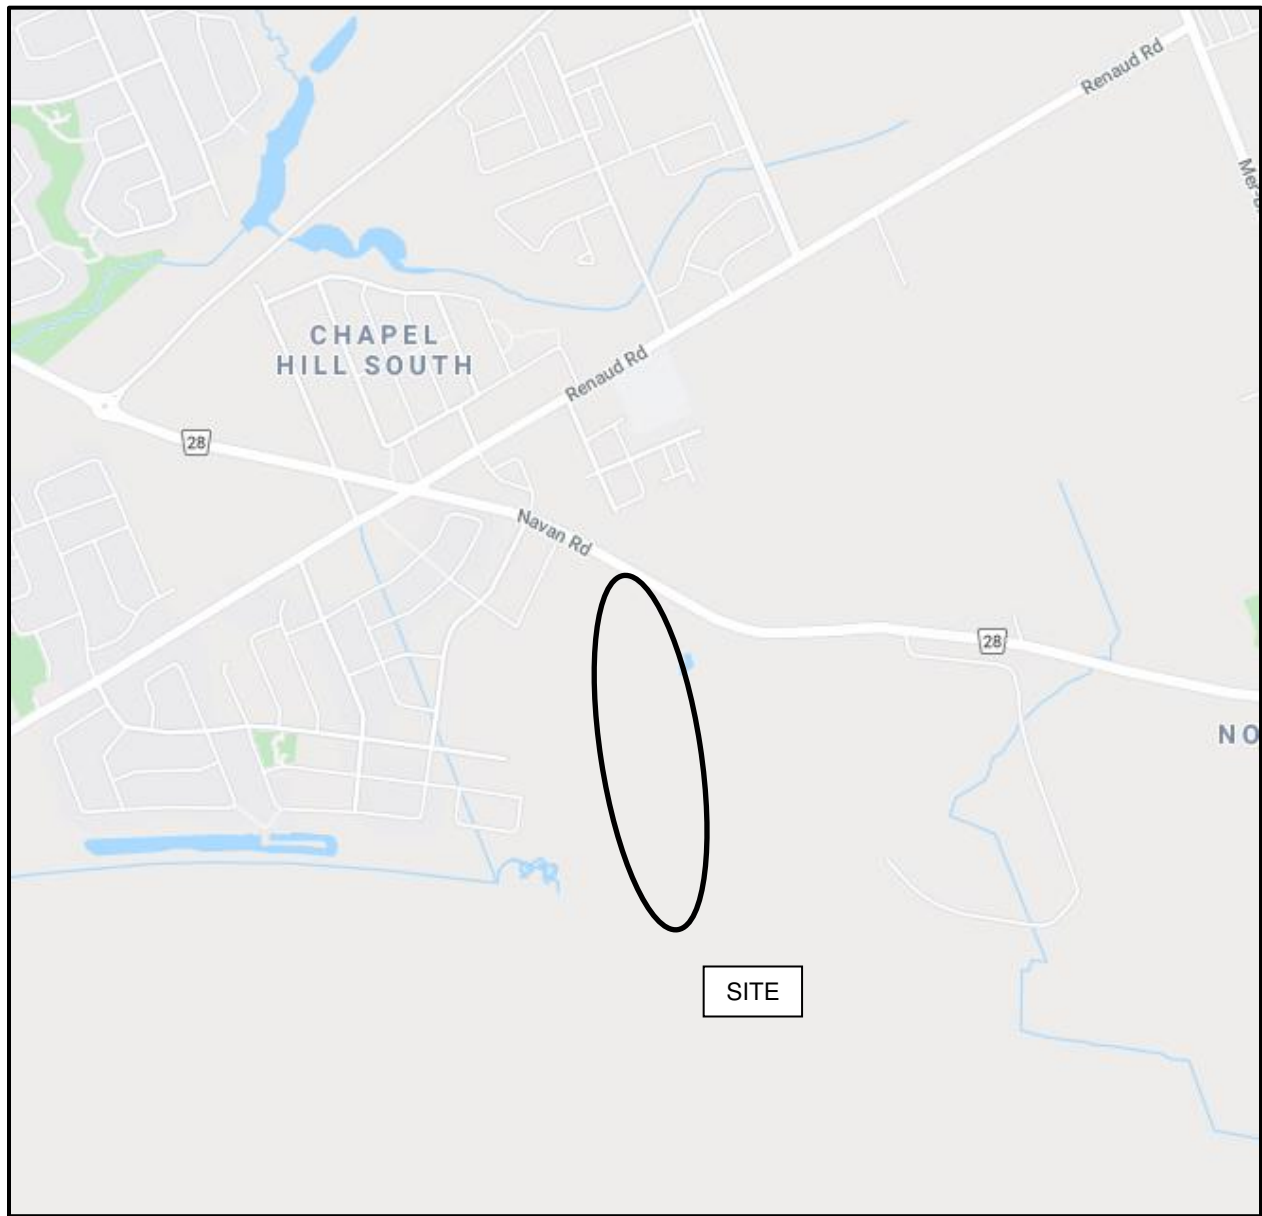
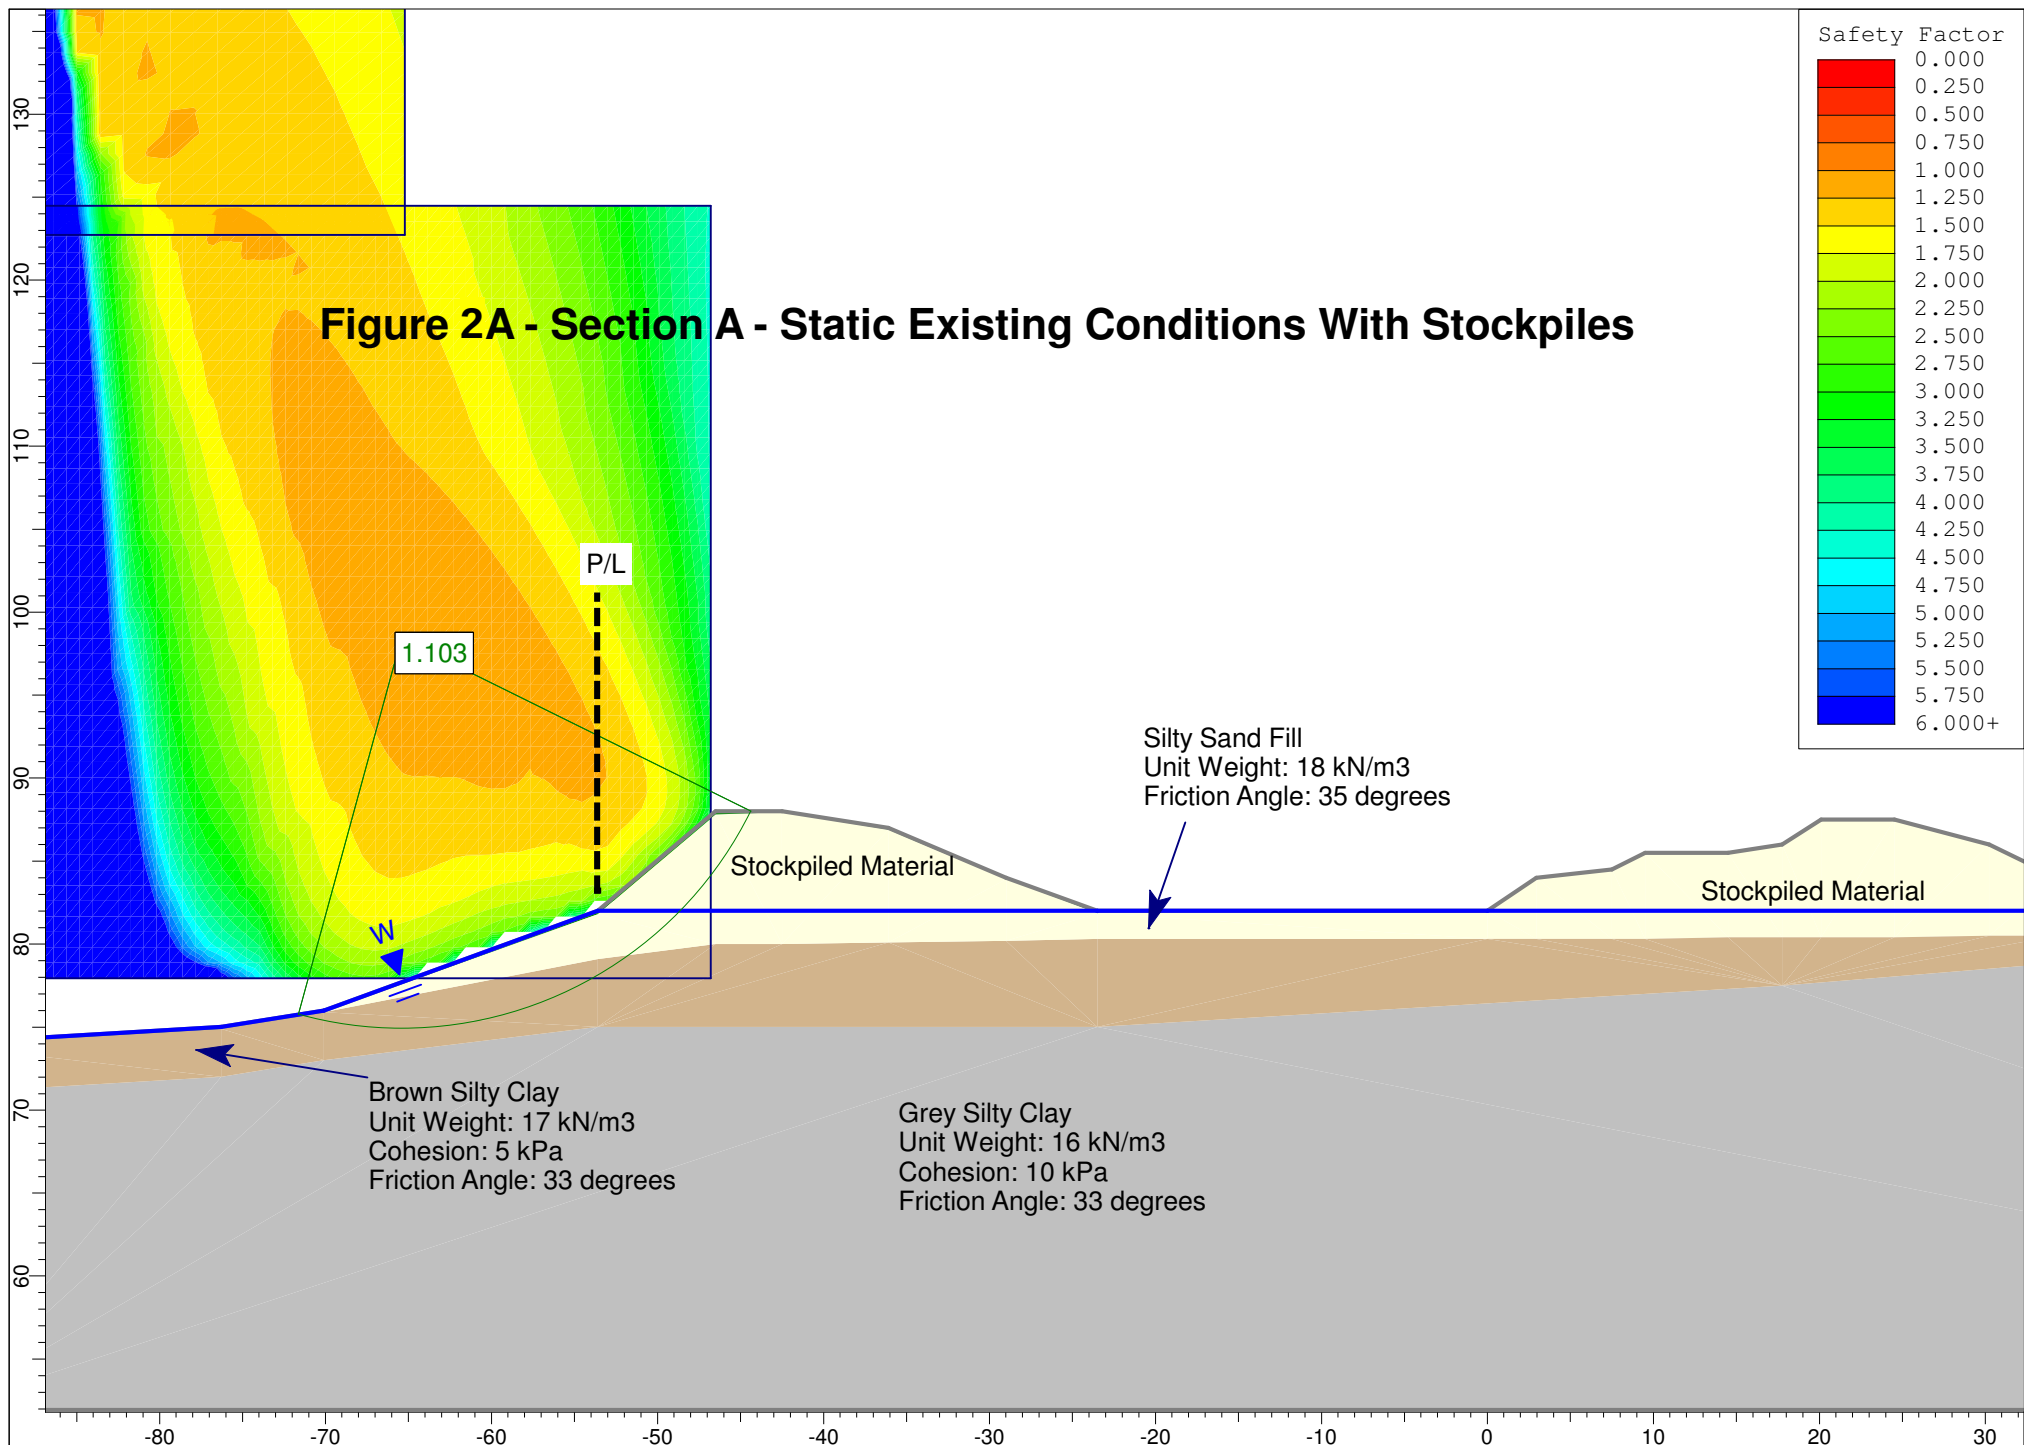
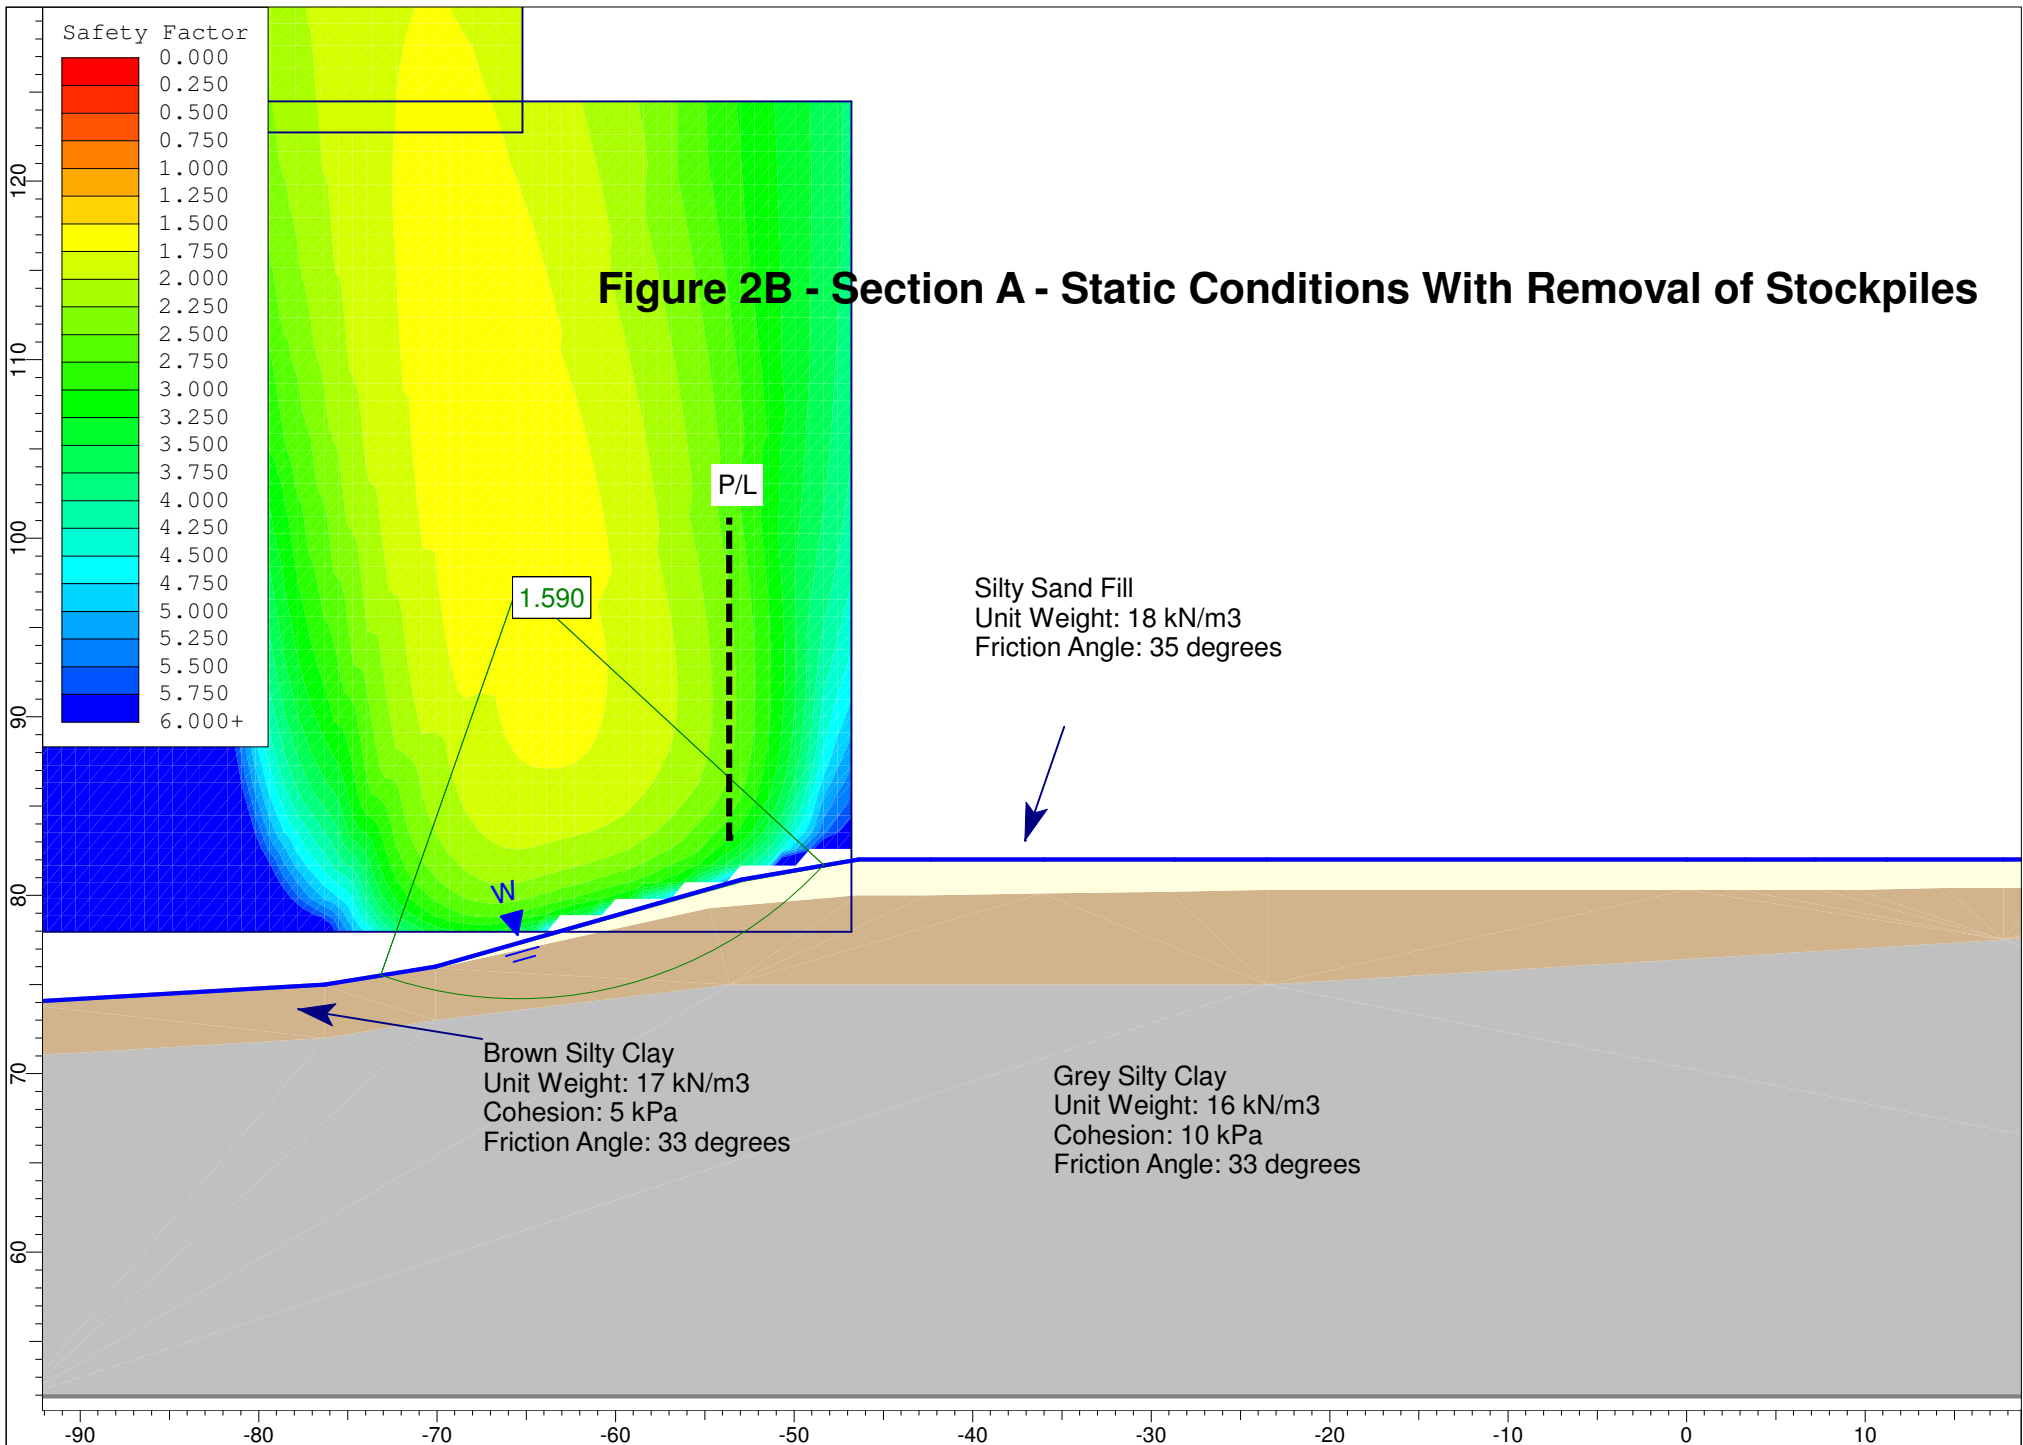


FIGURE 1

KEY PLAN

Figure 2A - Section A - Static Existing Conditions With Stockpiles





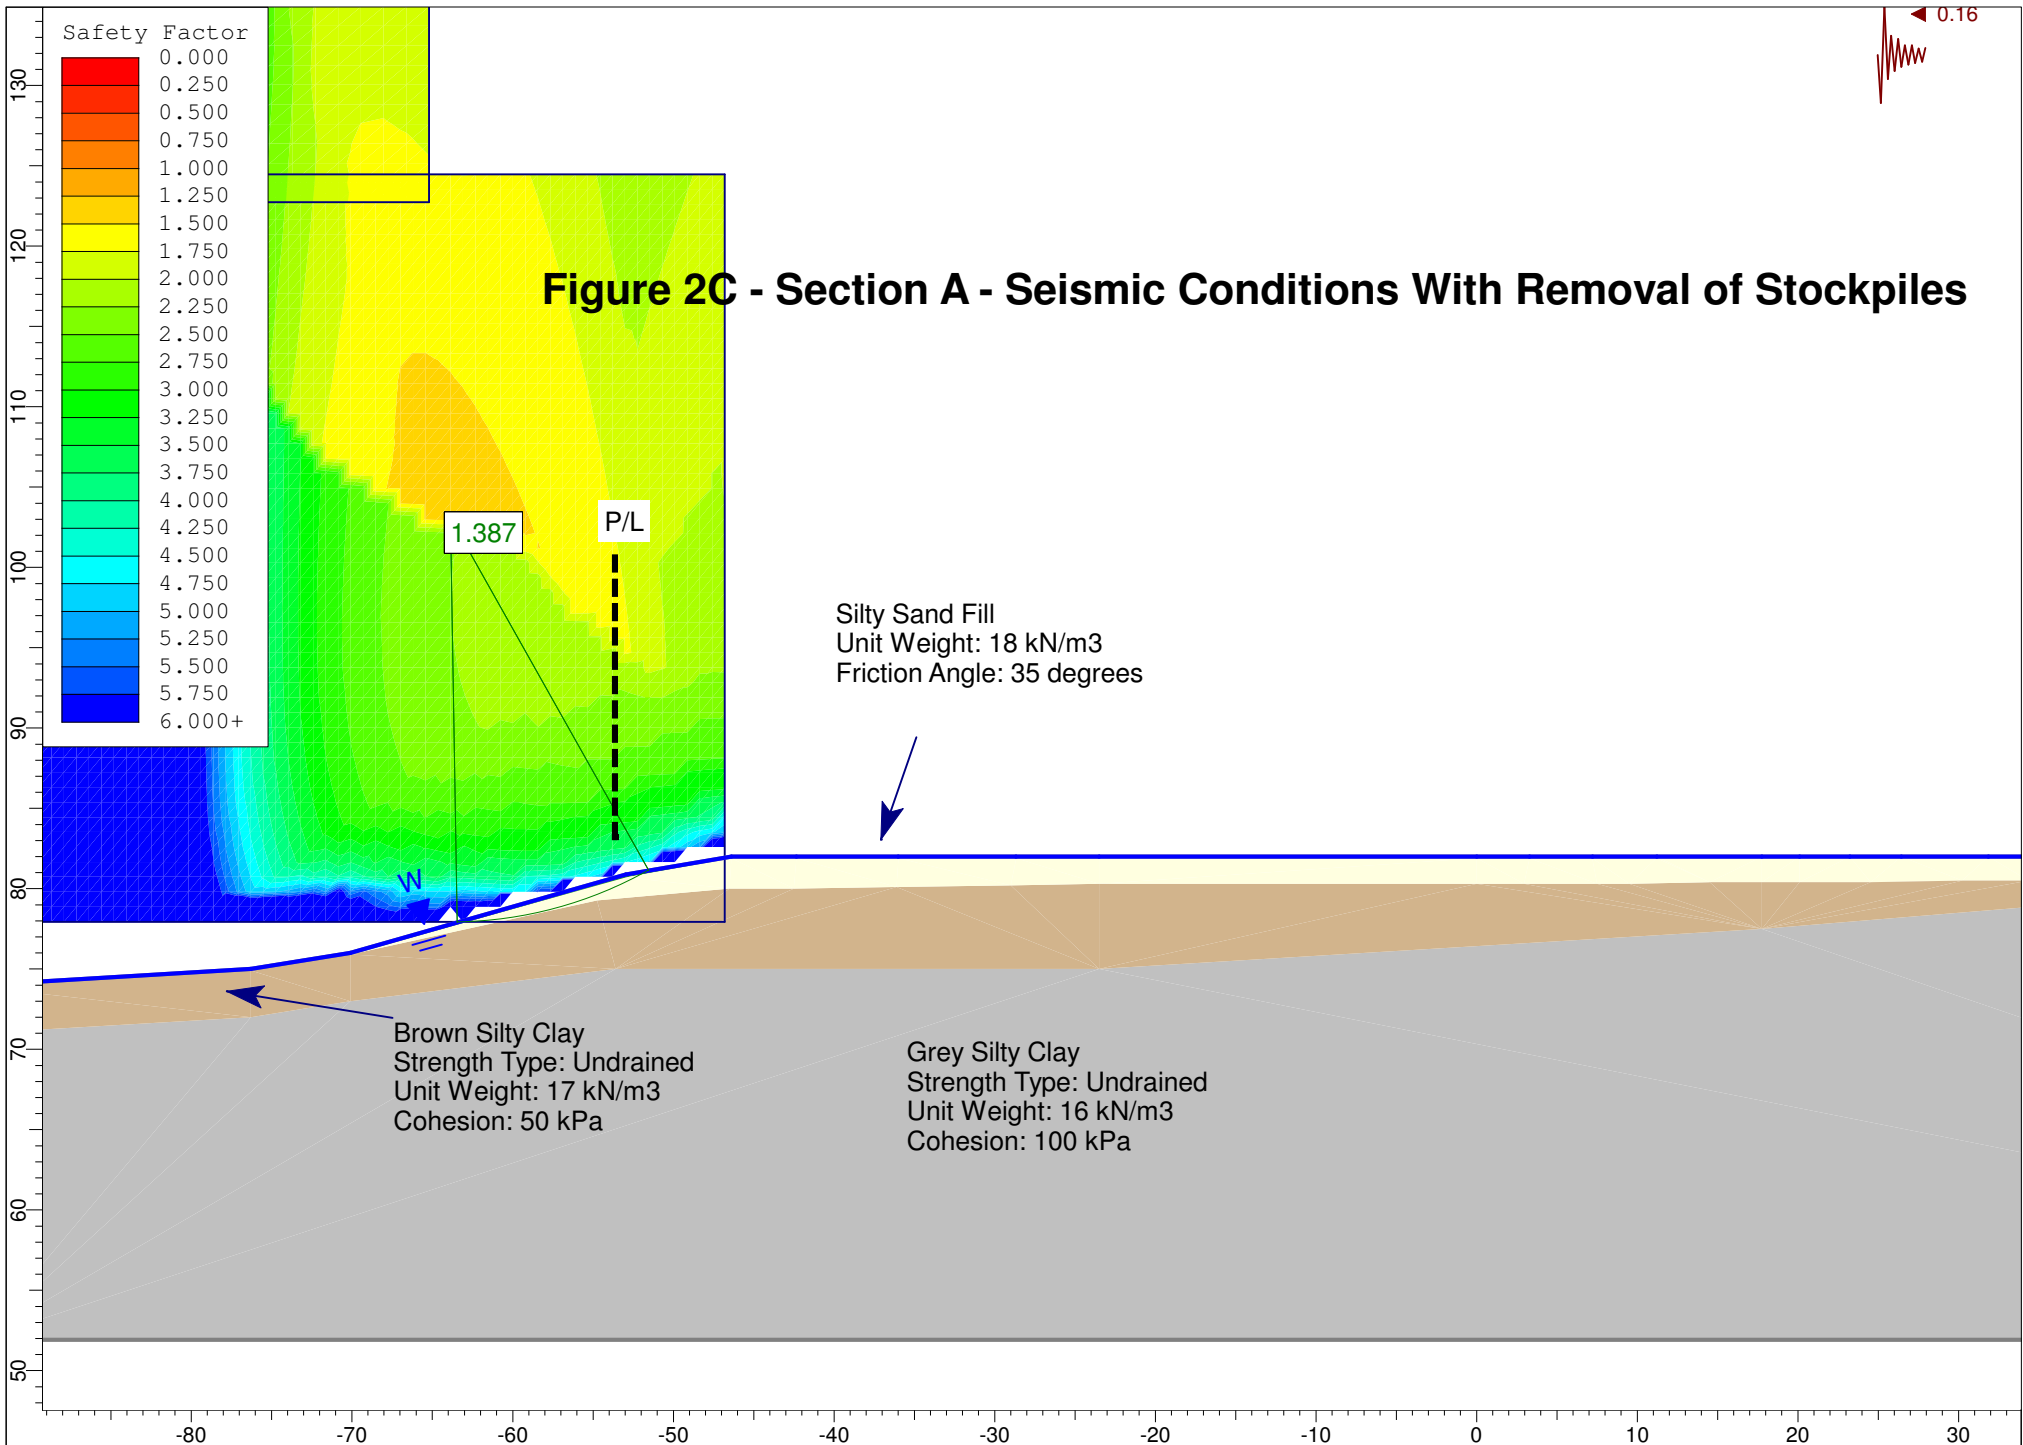


Figure 3A - Section B - Static Existing Conditions With Stockpiles

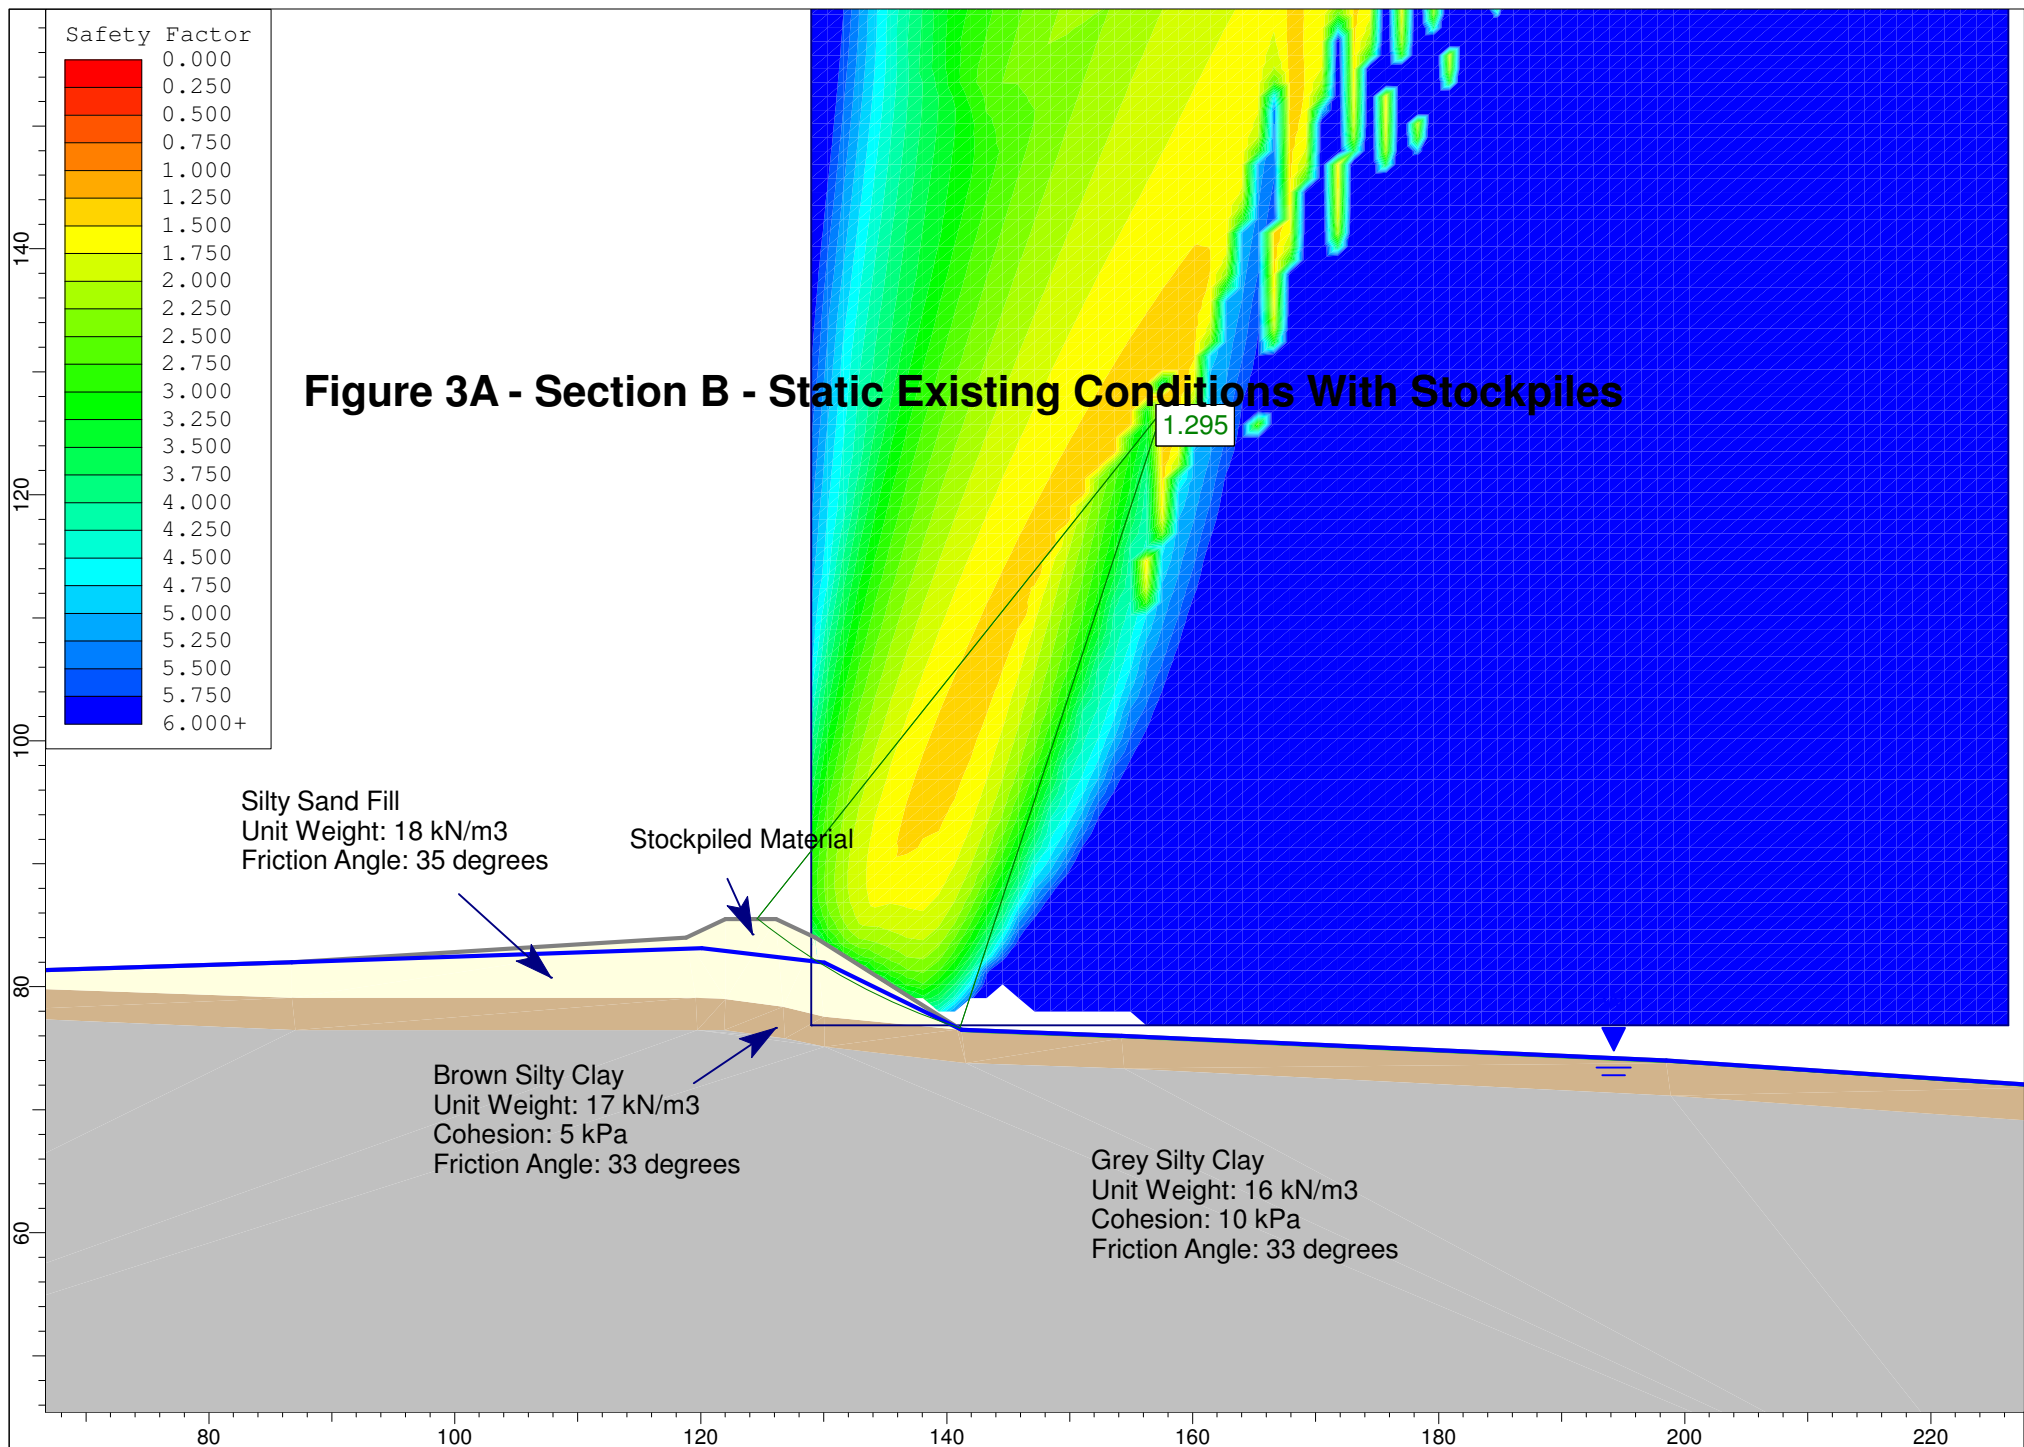
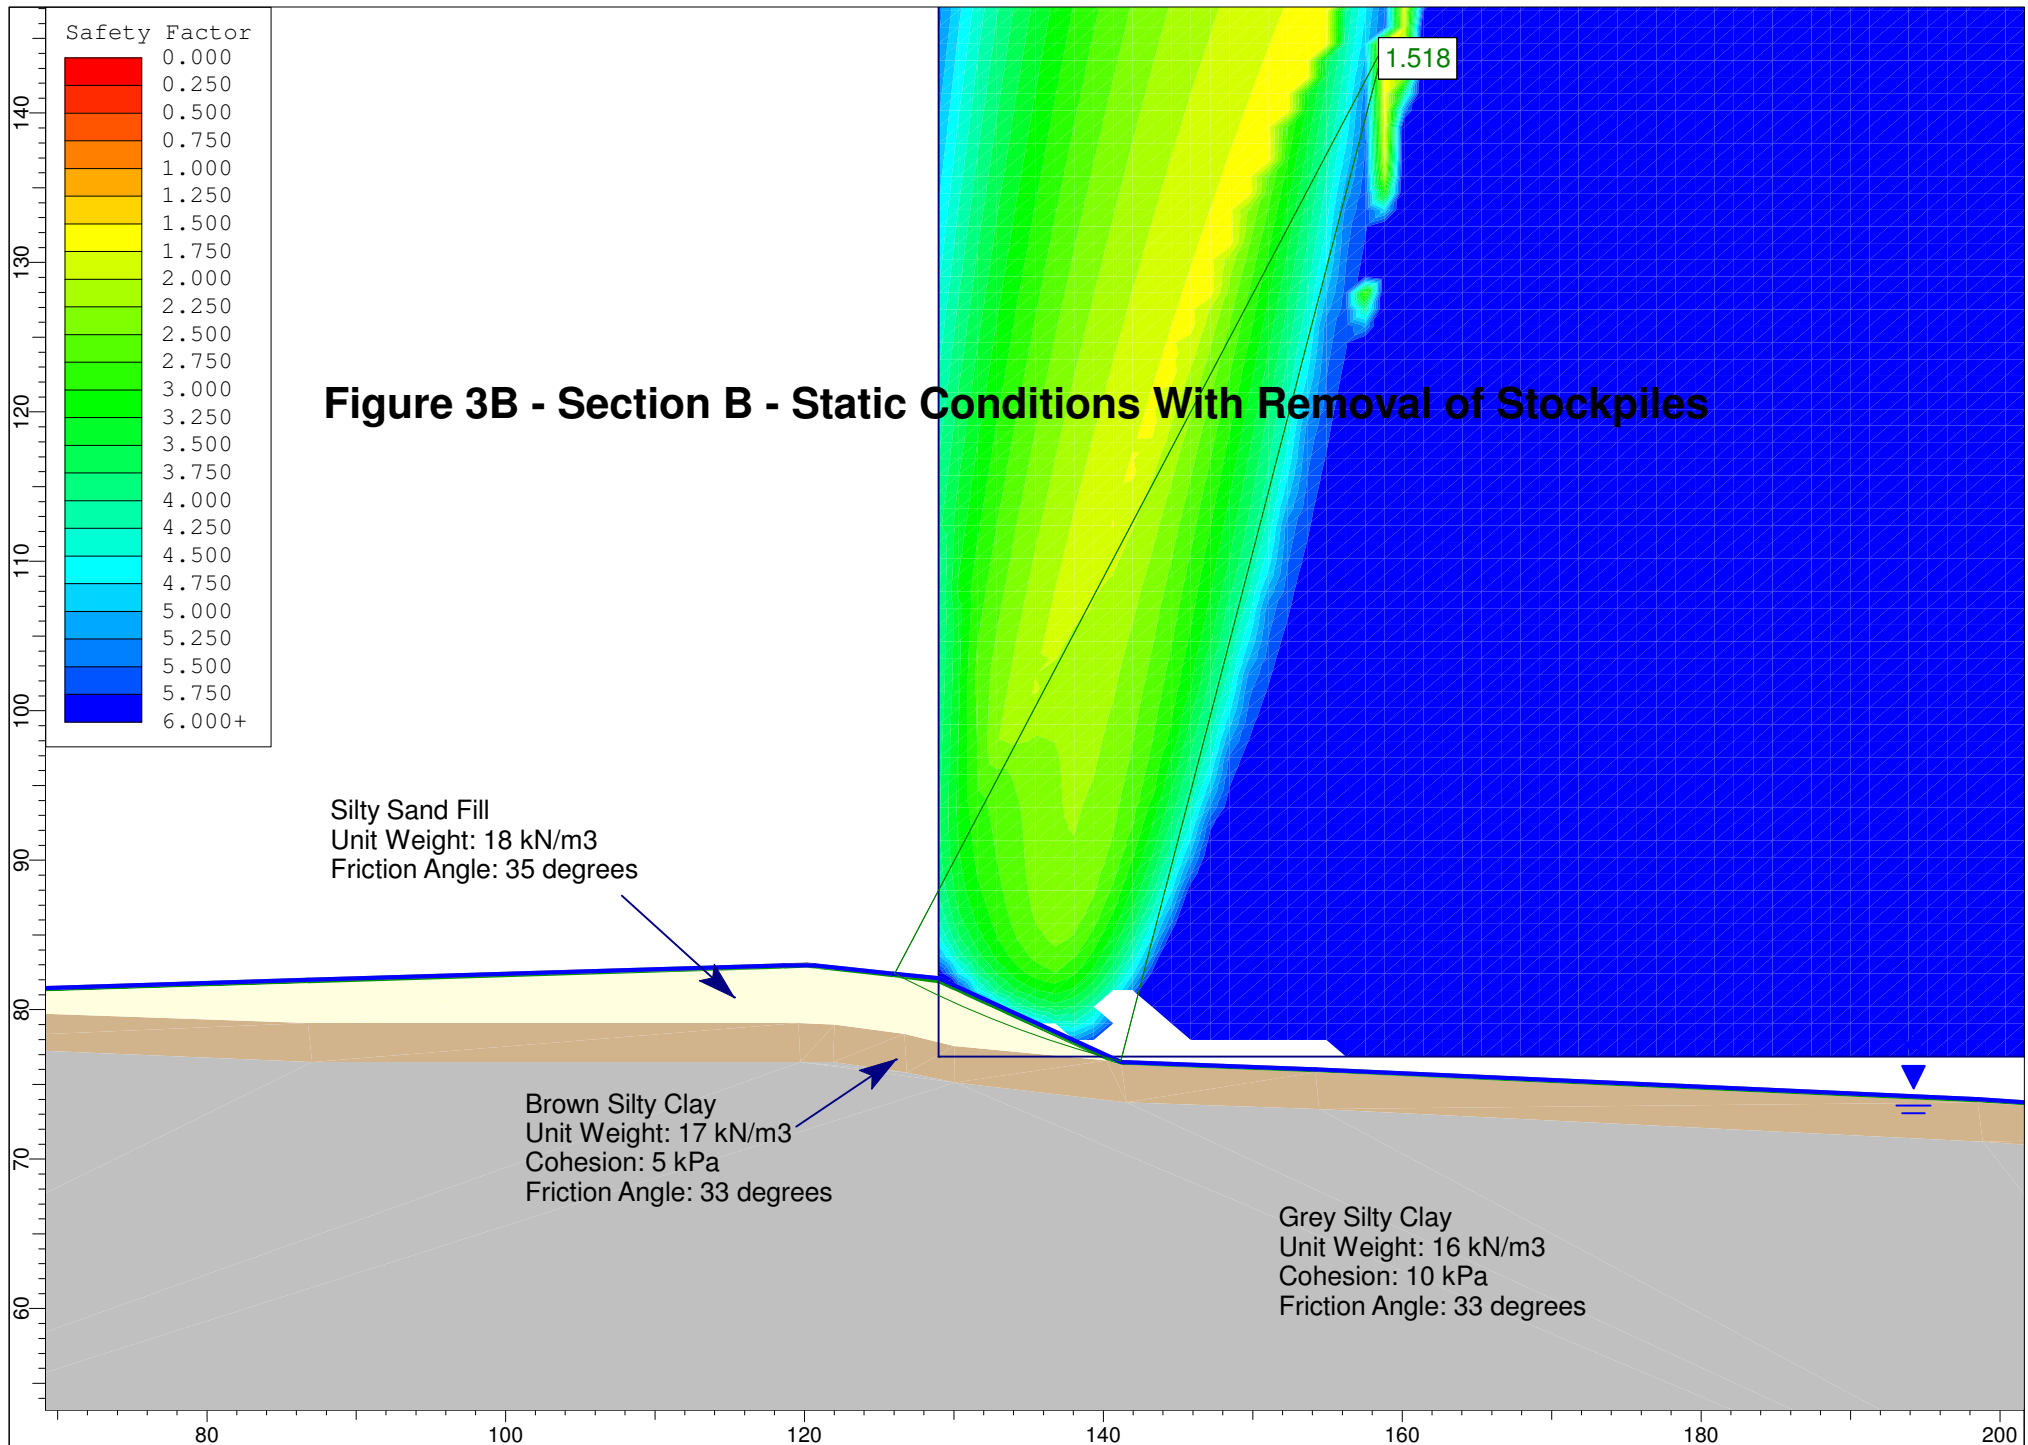


Figure 3B - Section B - Static Conditions With Removal of Stockpiles



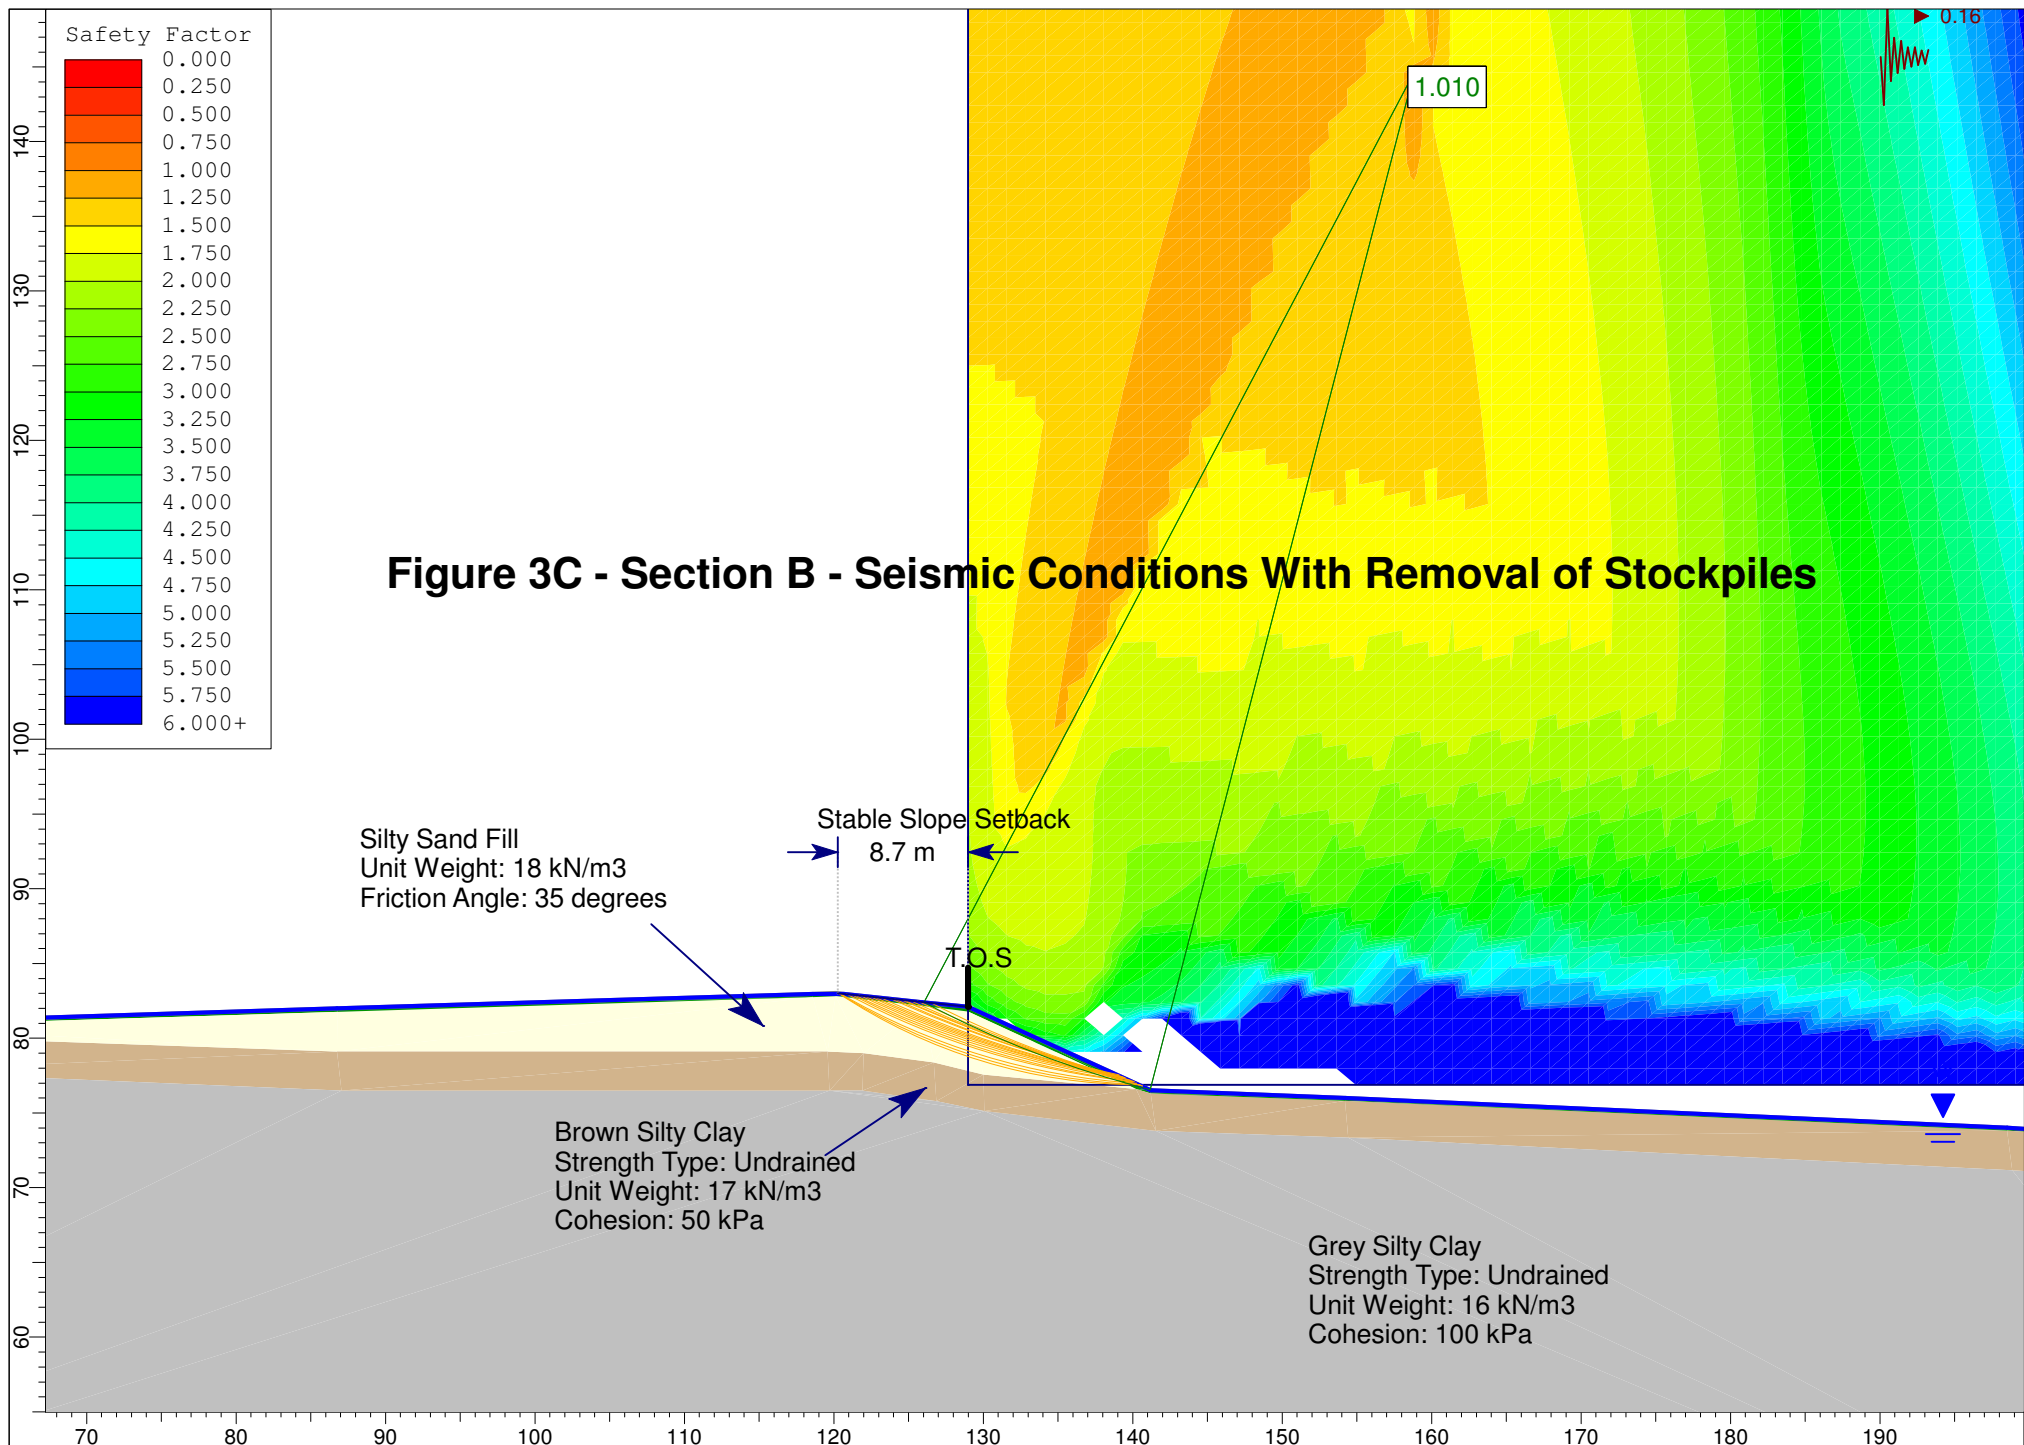


Figure 4A - Section C - Static Conditions

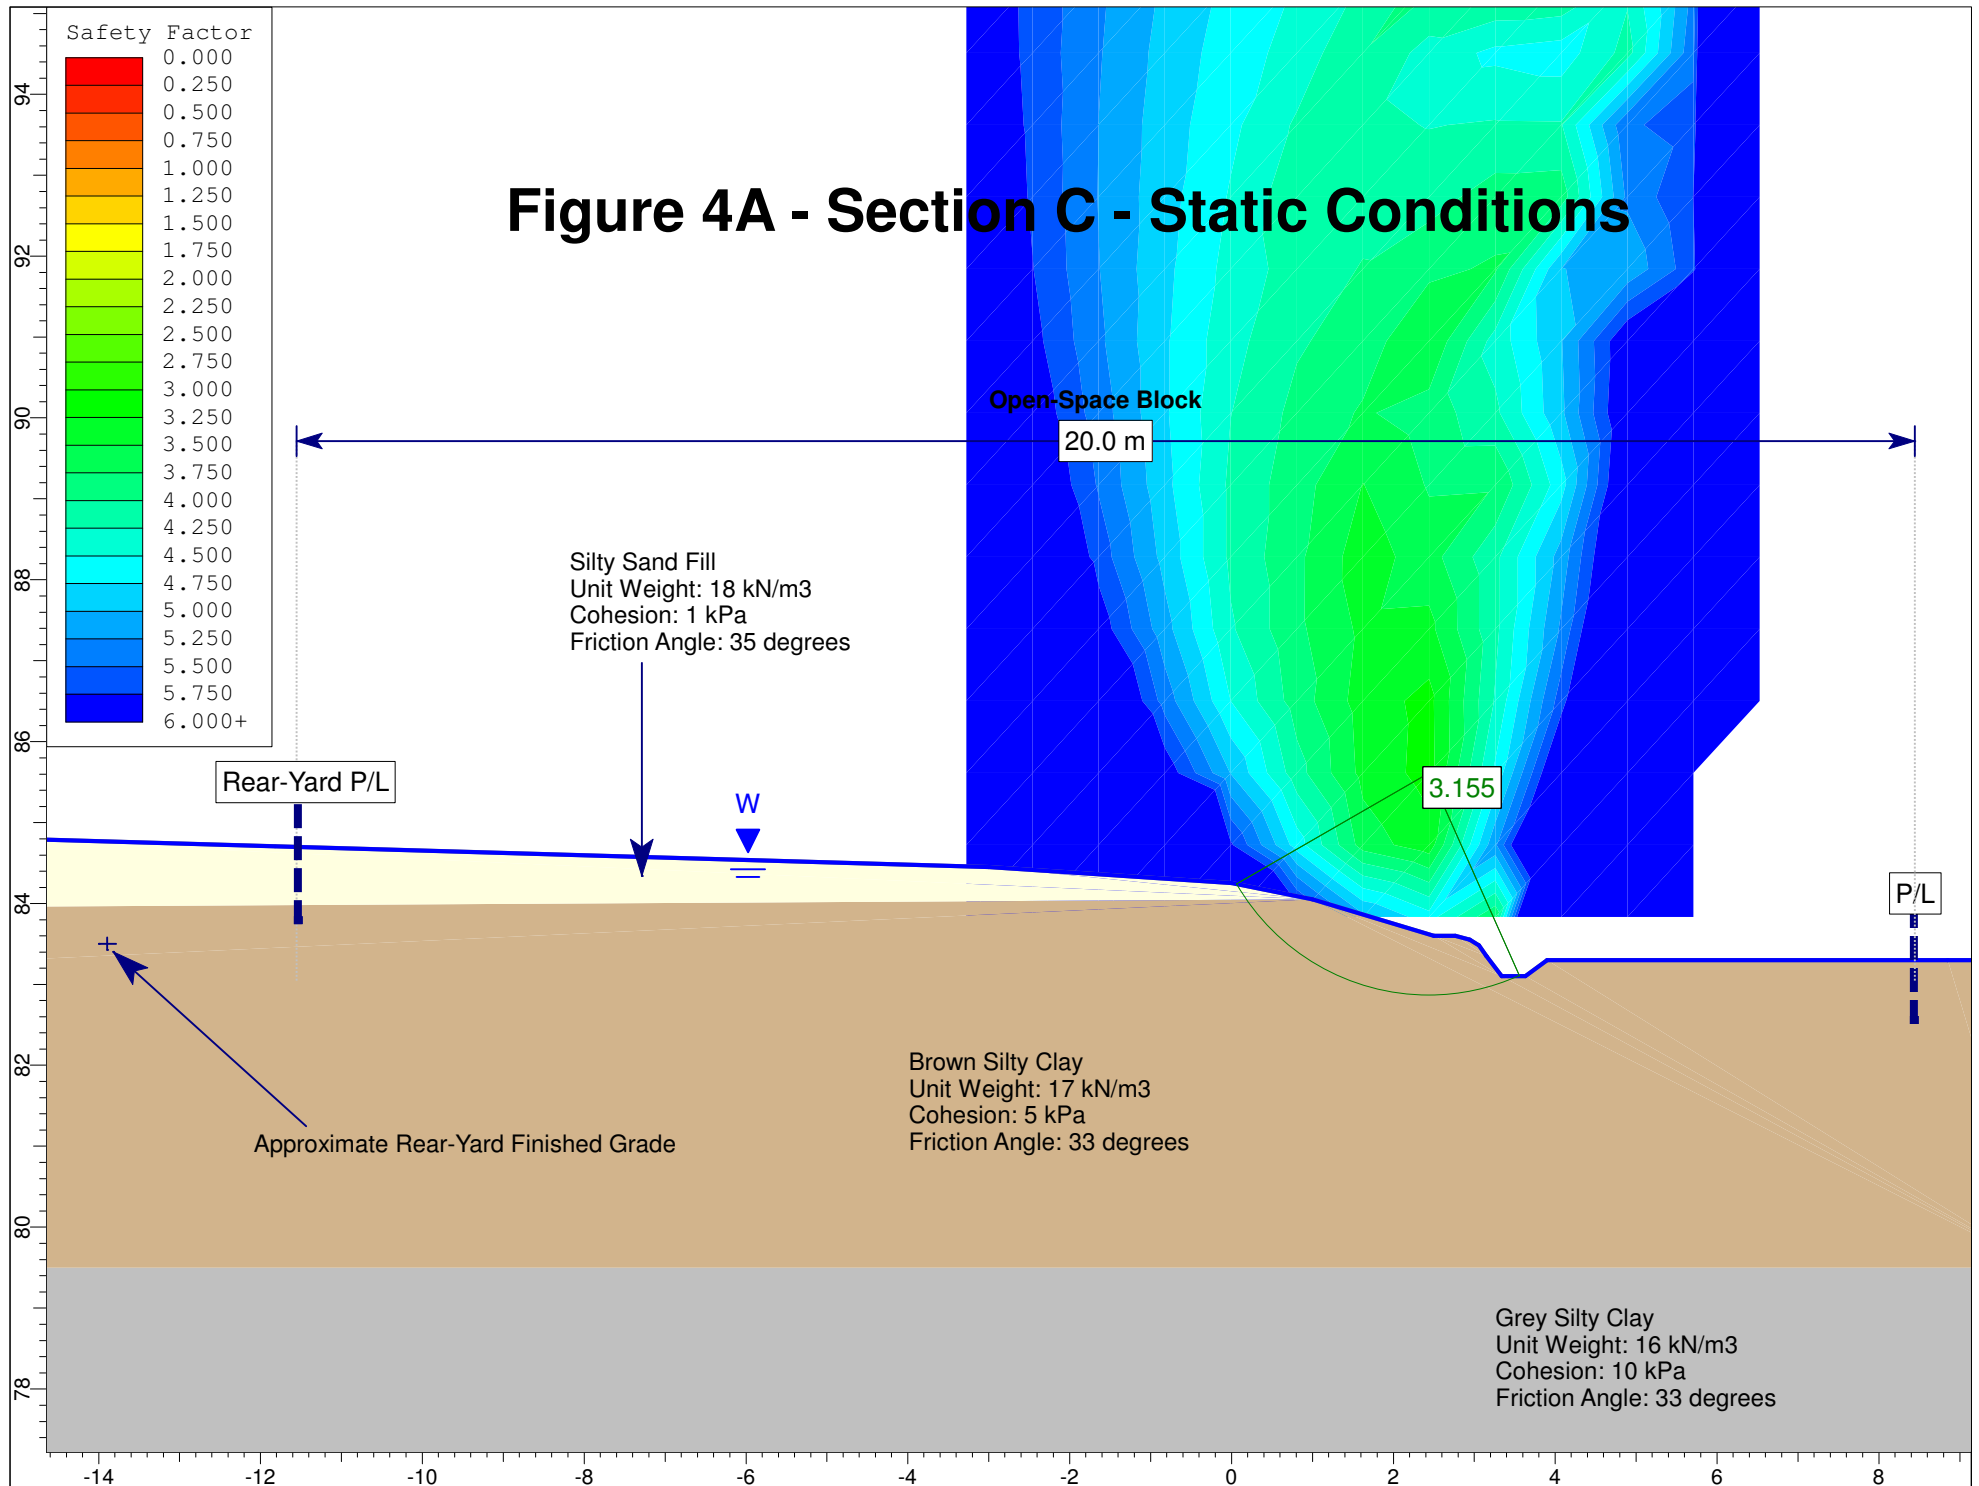


Figure 4B - Section C - Seismic Conditions

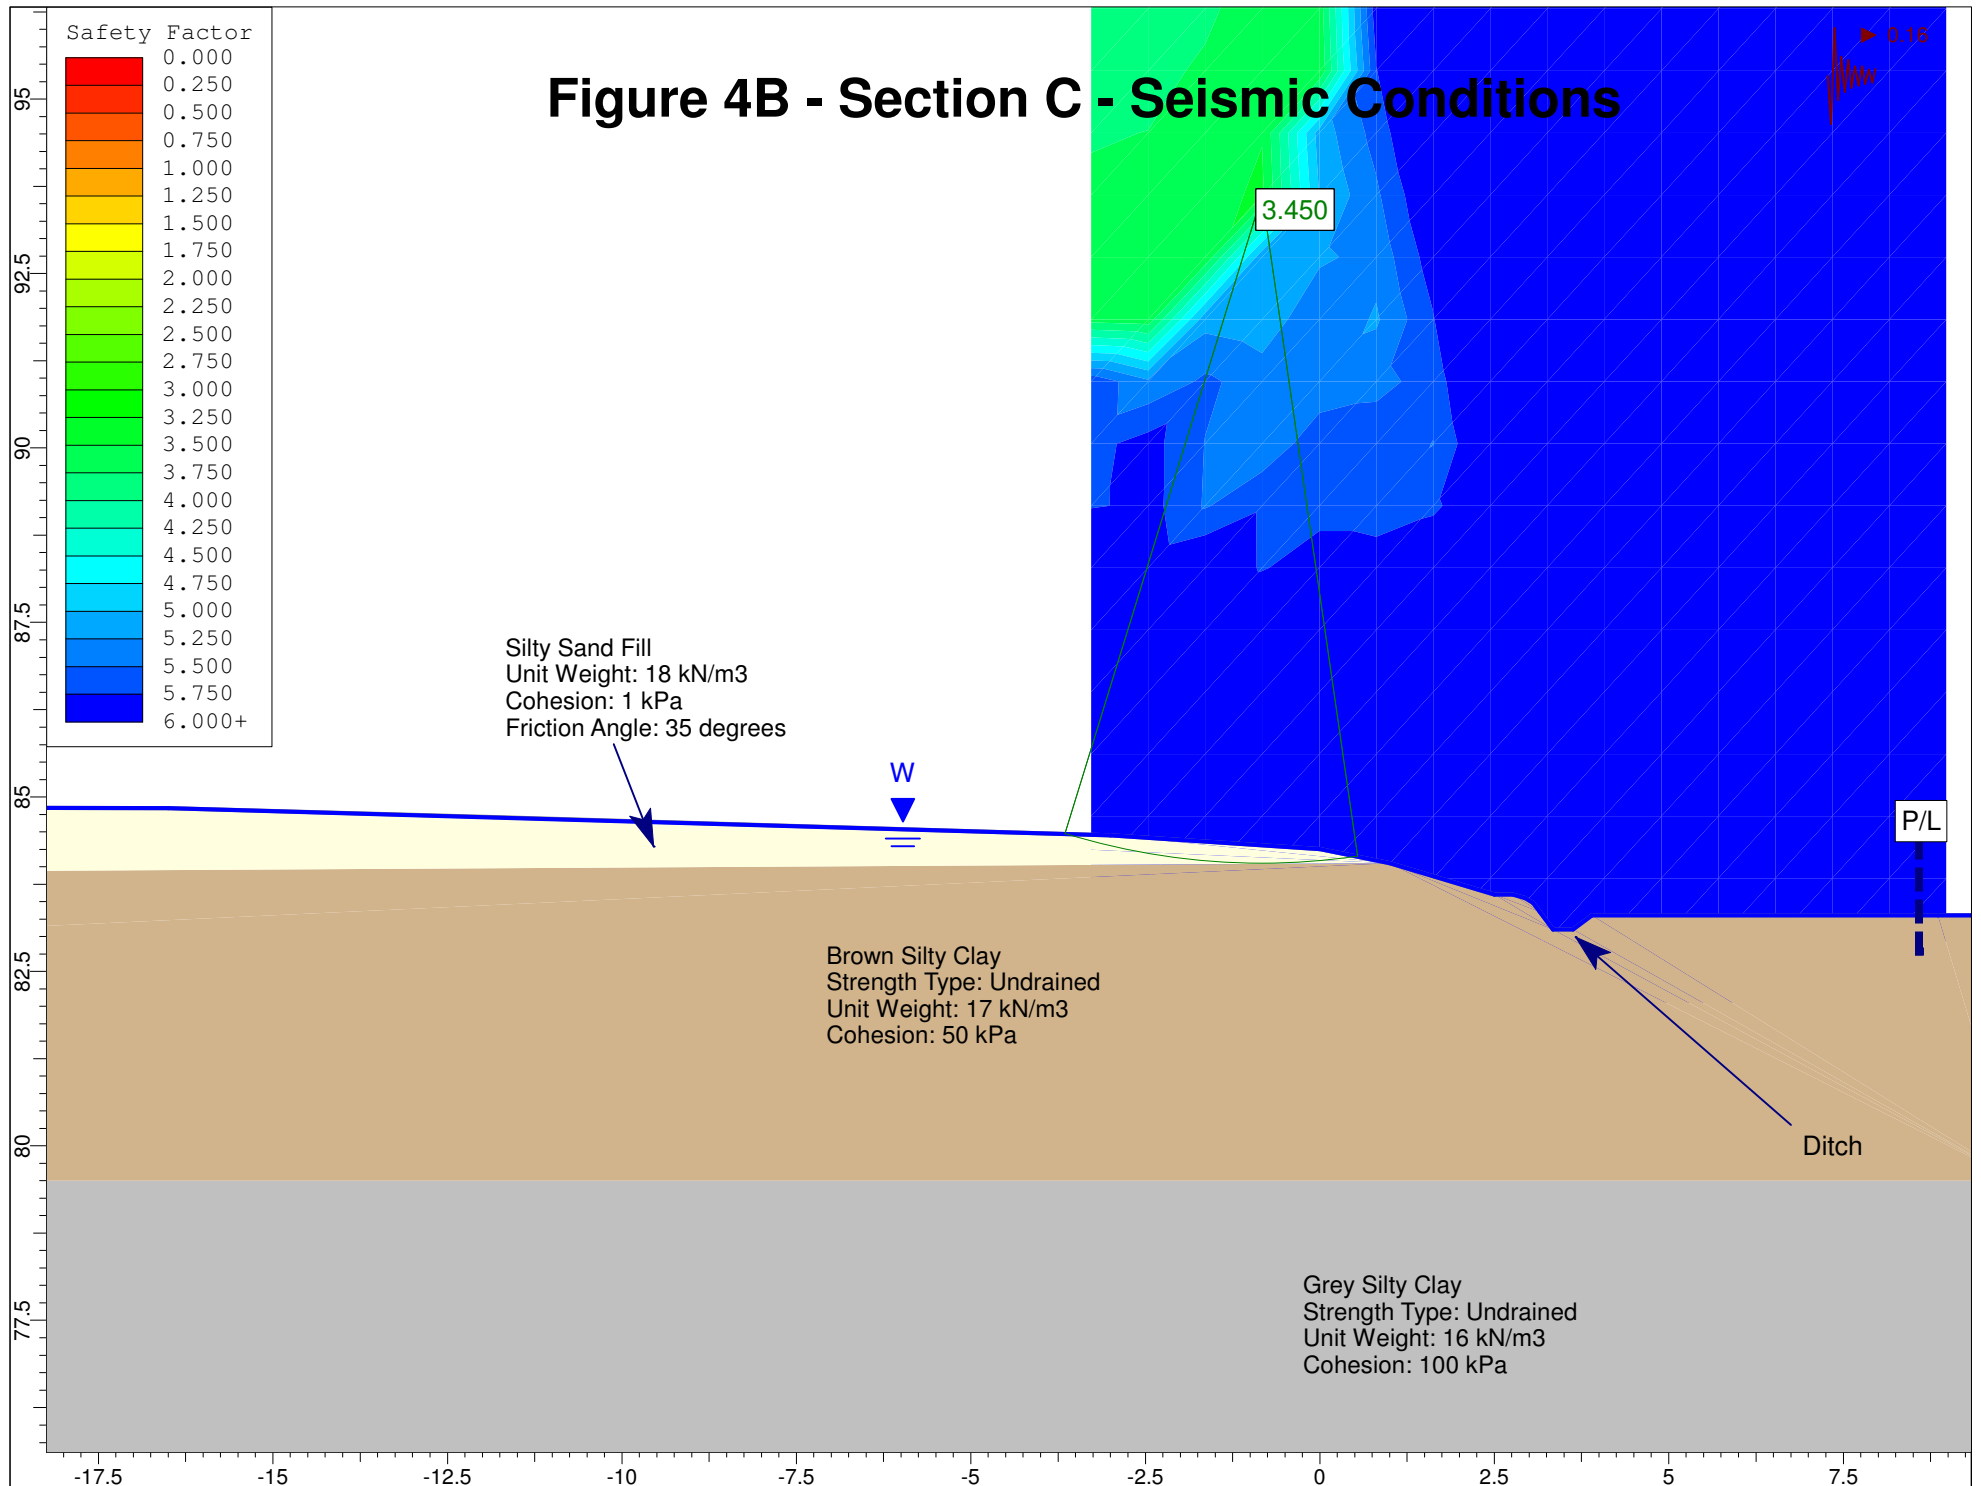
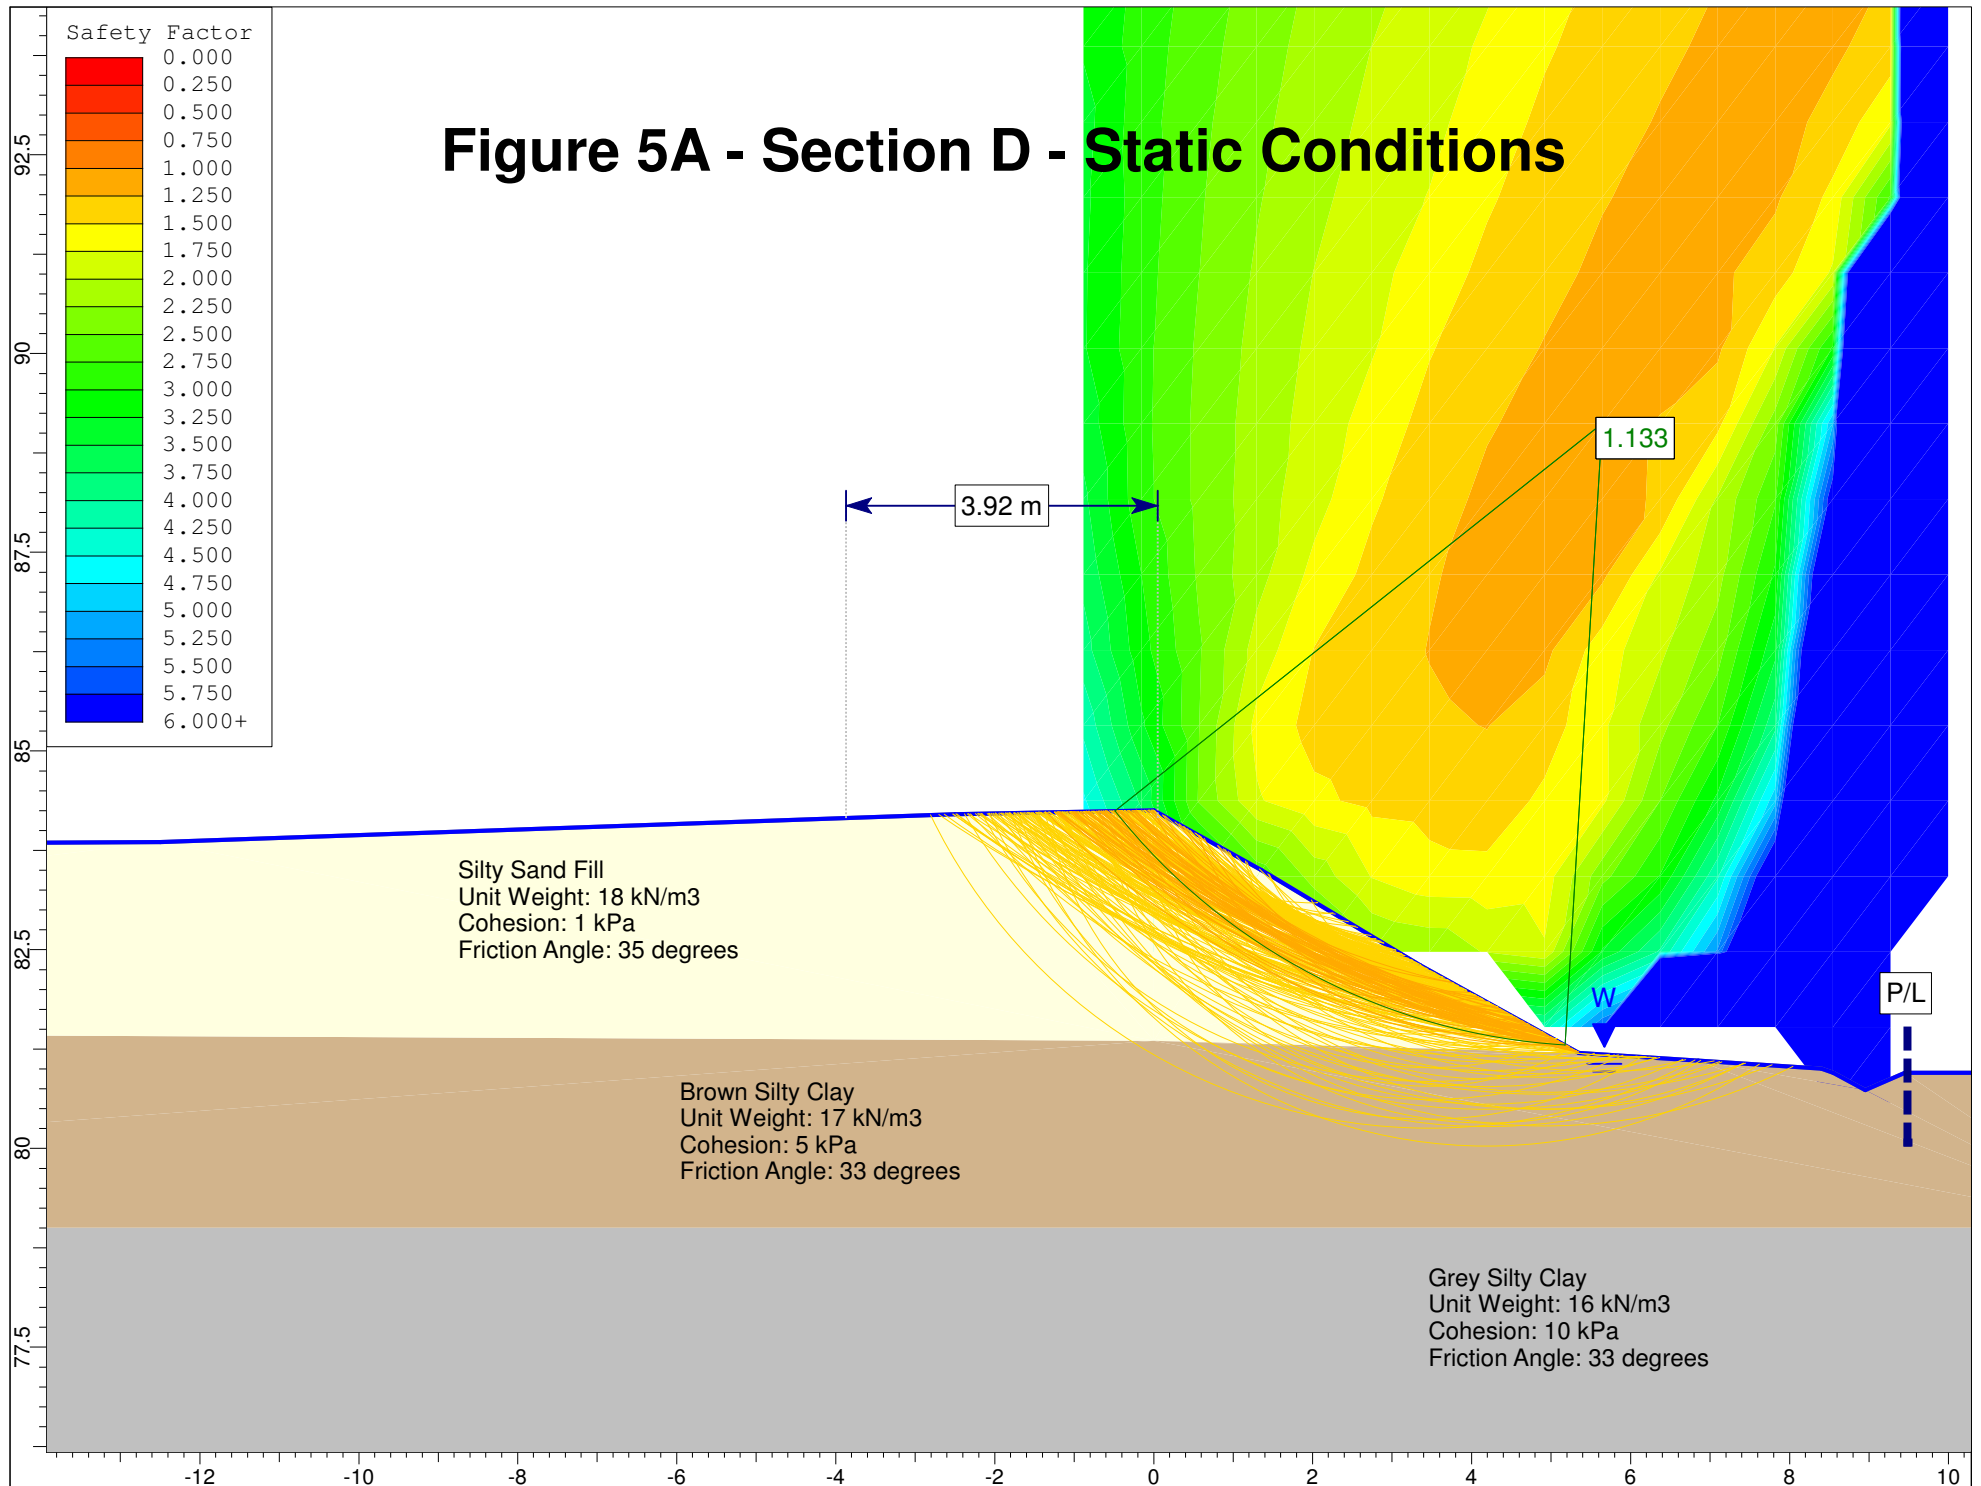


Figure 5A - Section D - Static Conditions



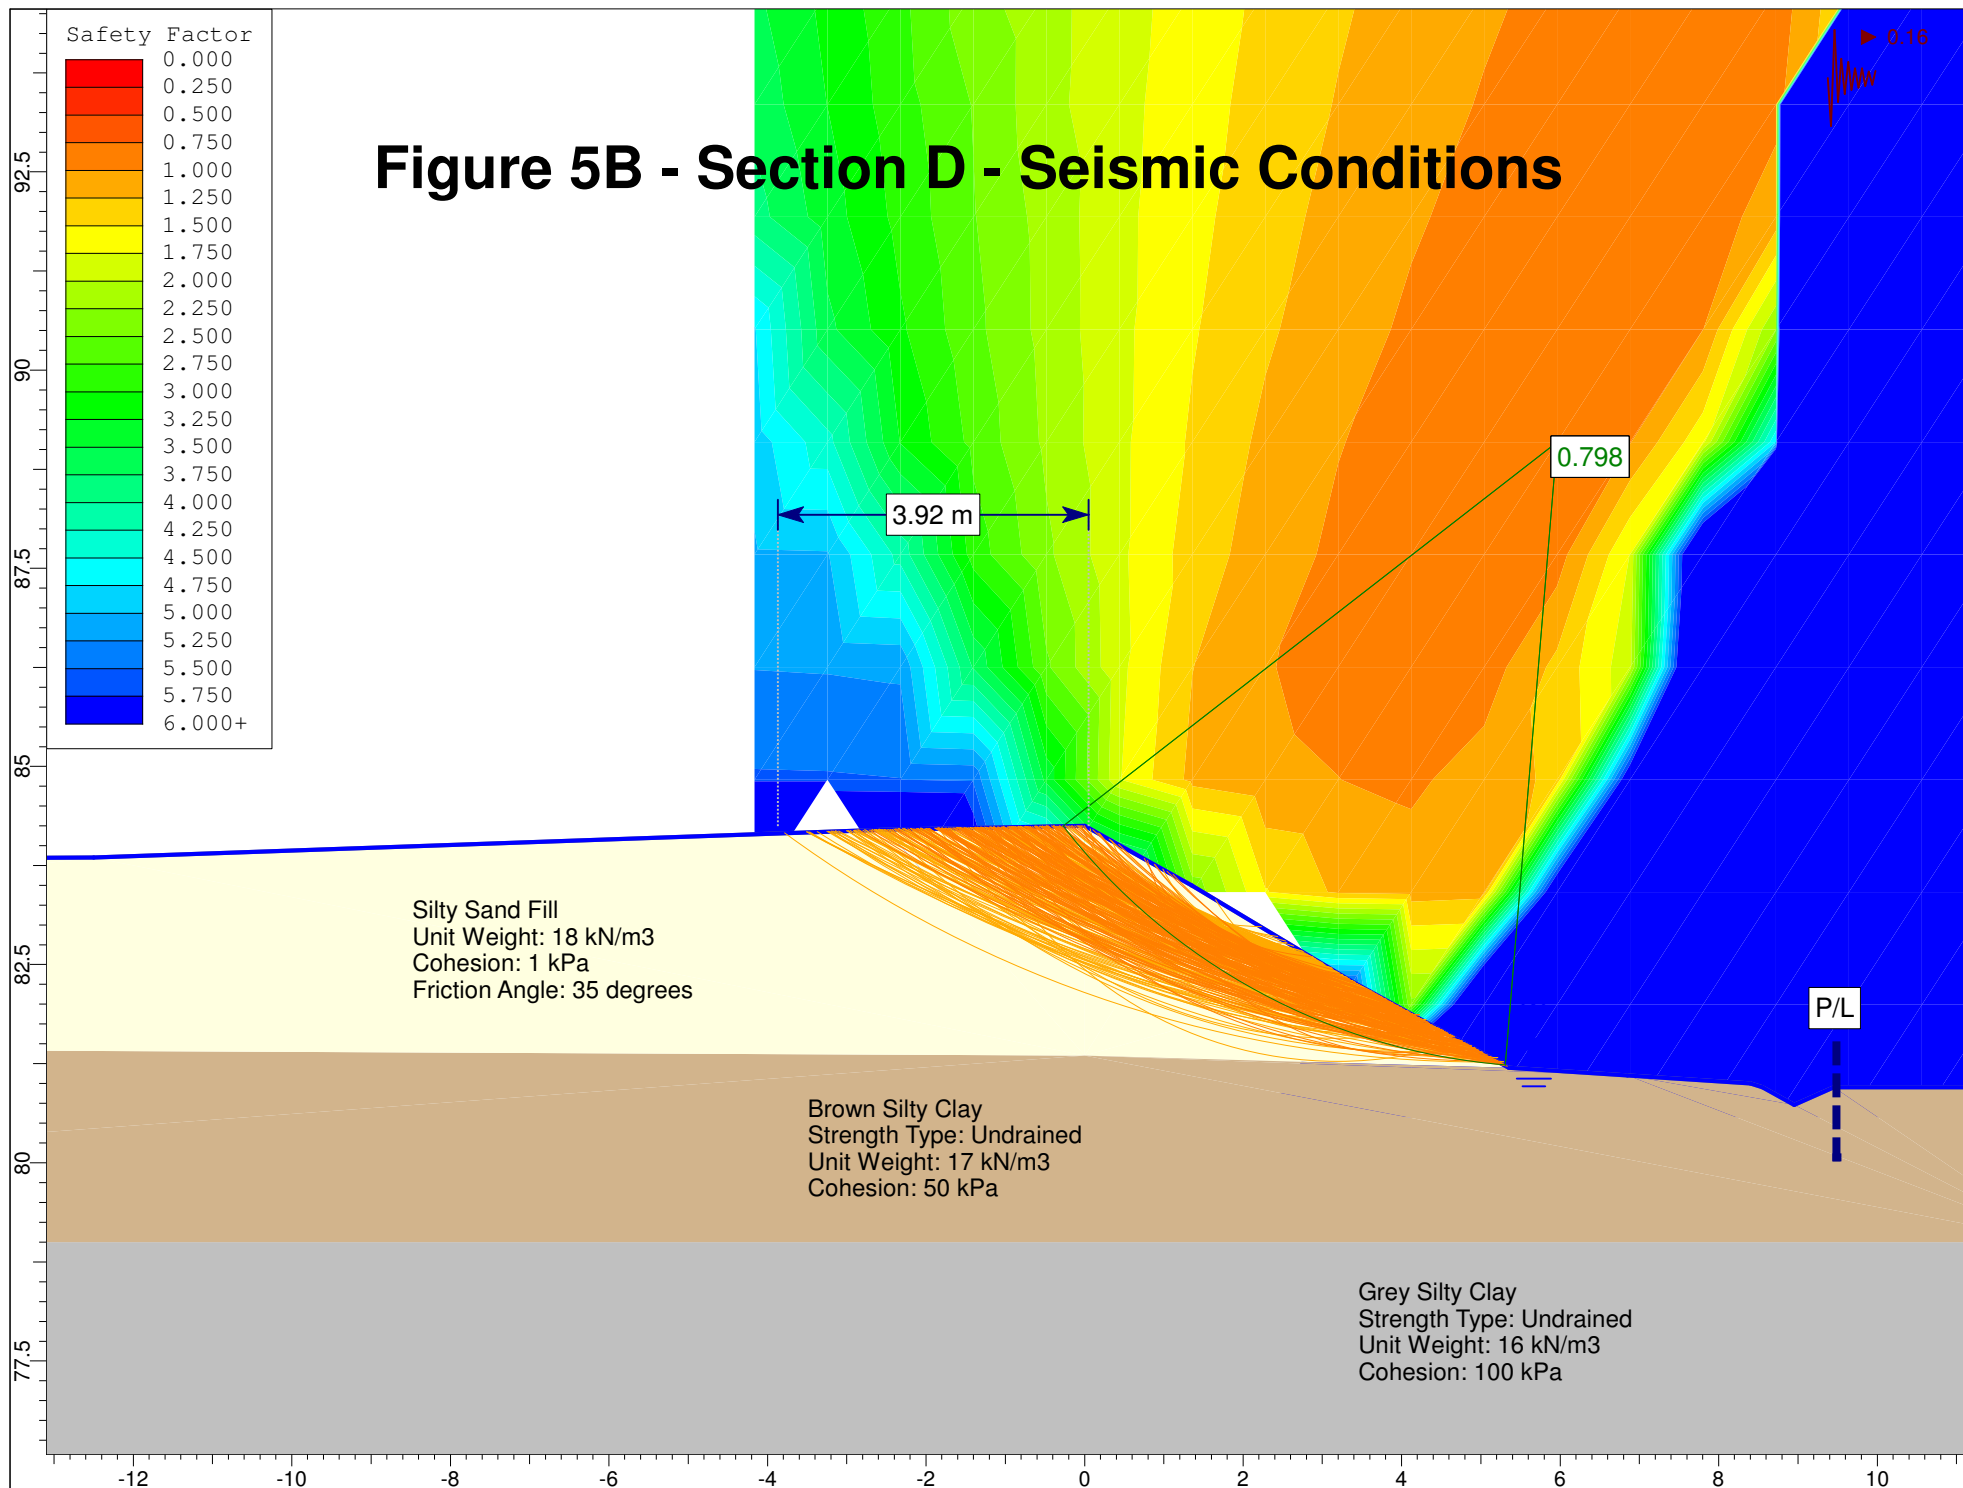
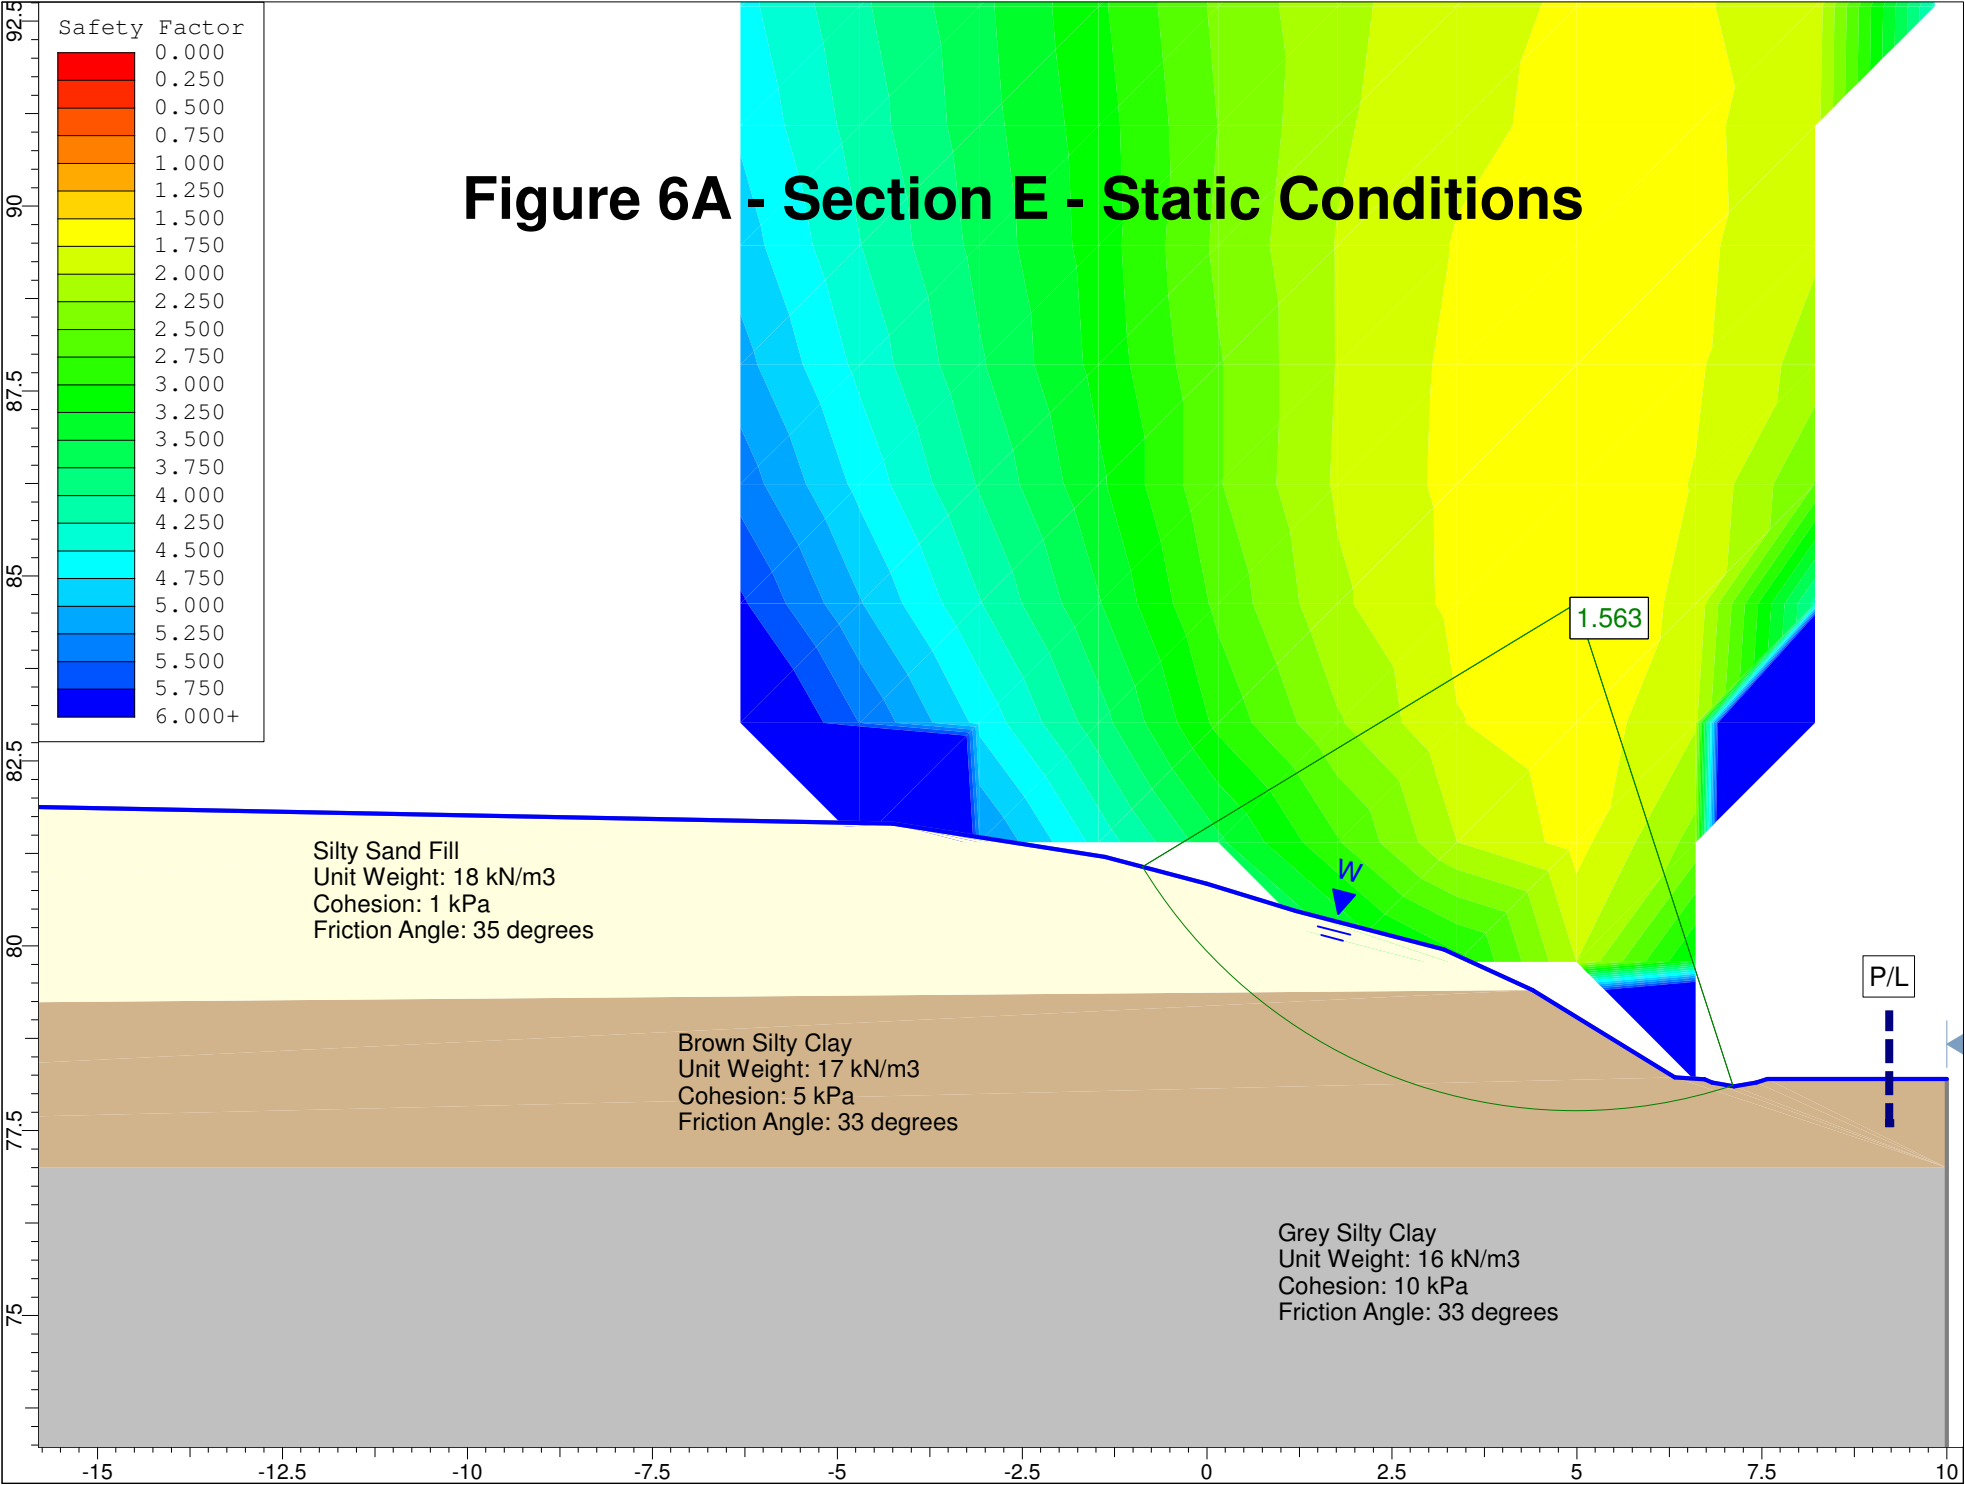


Figure 6A - Section E - Static Conditions





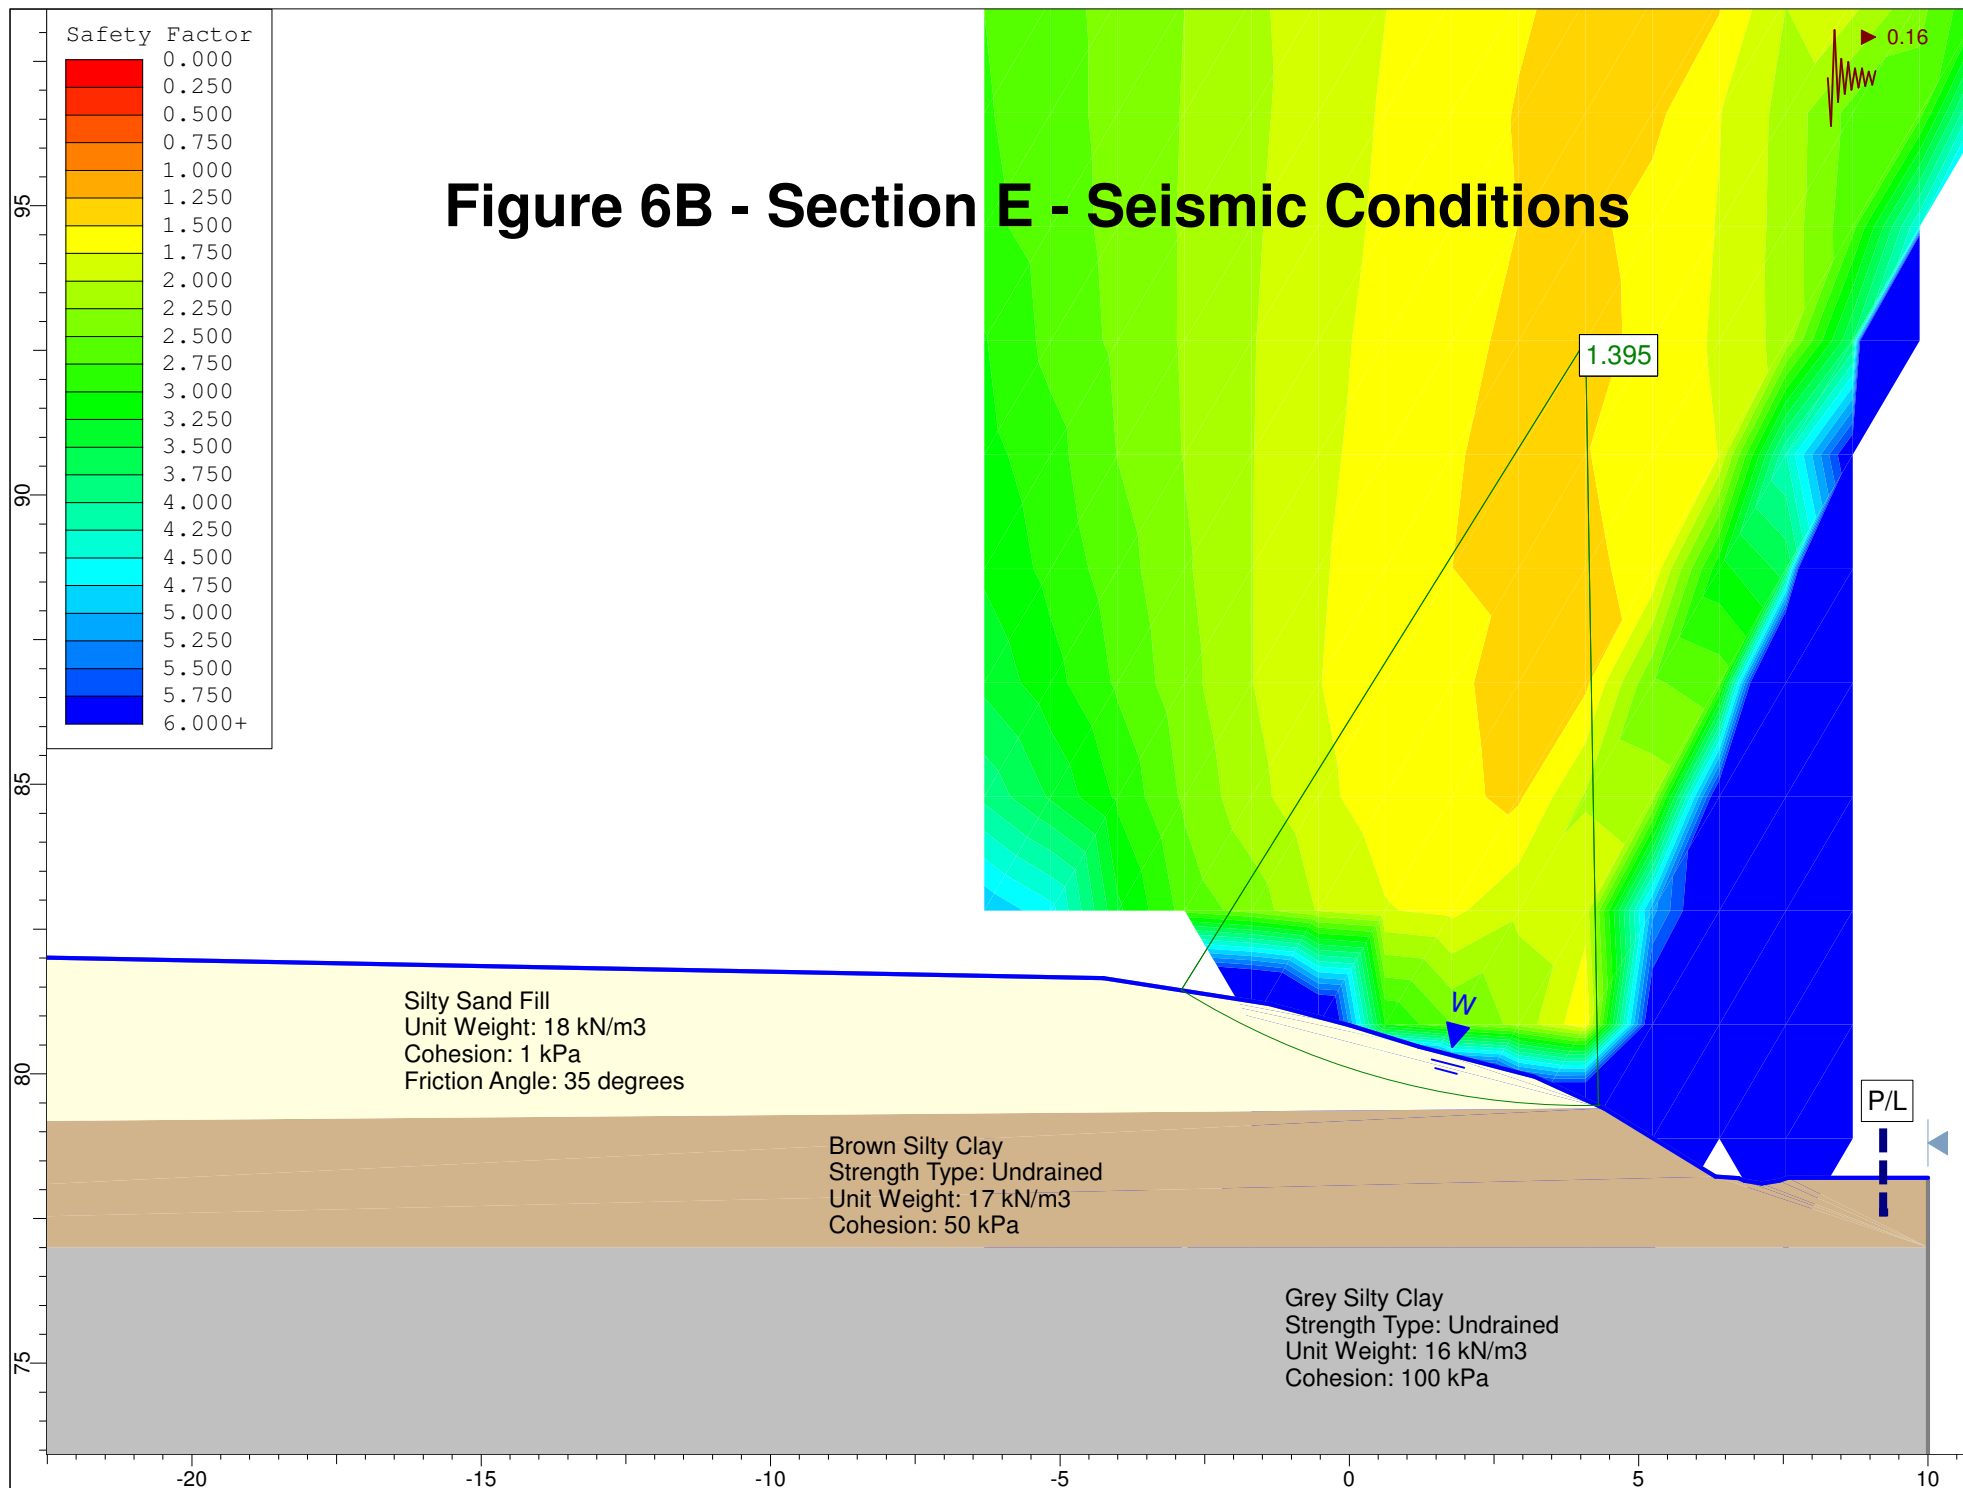


Figure 7A - Section F - Static Conditions

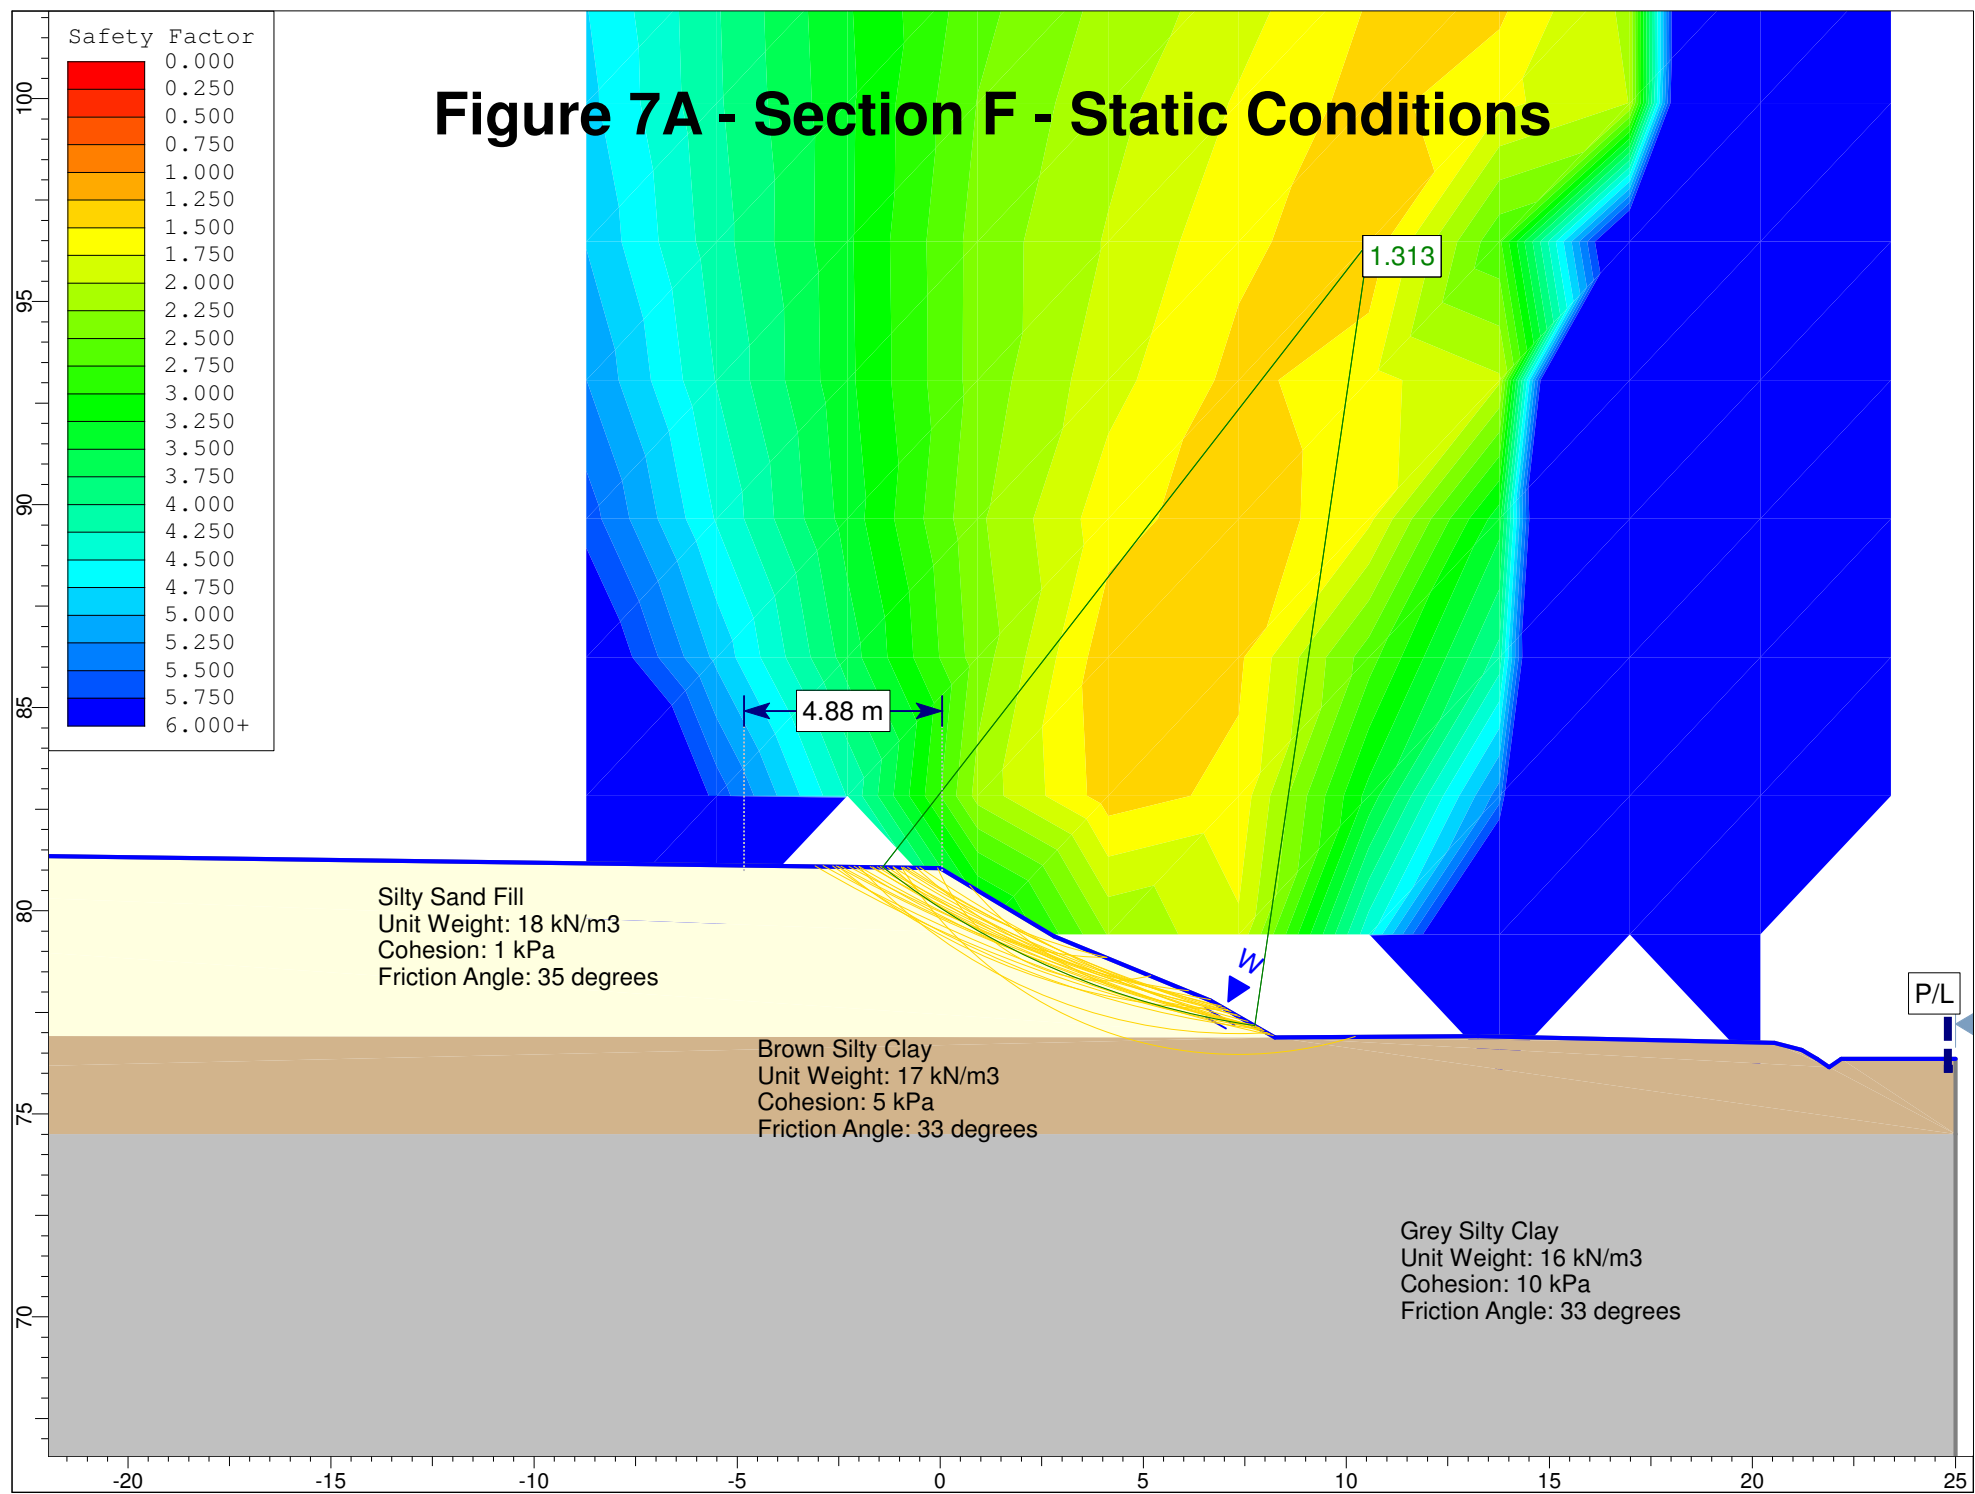

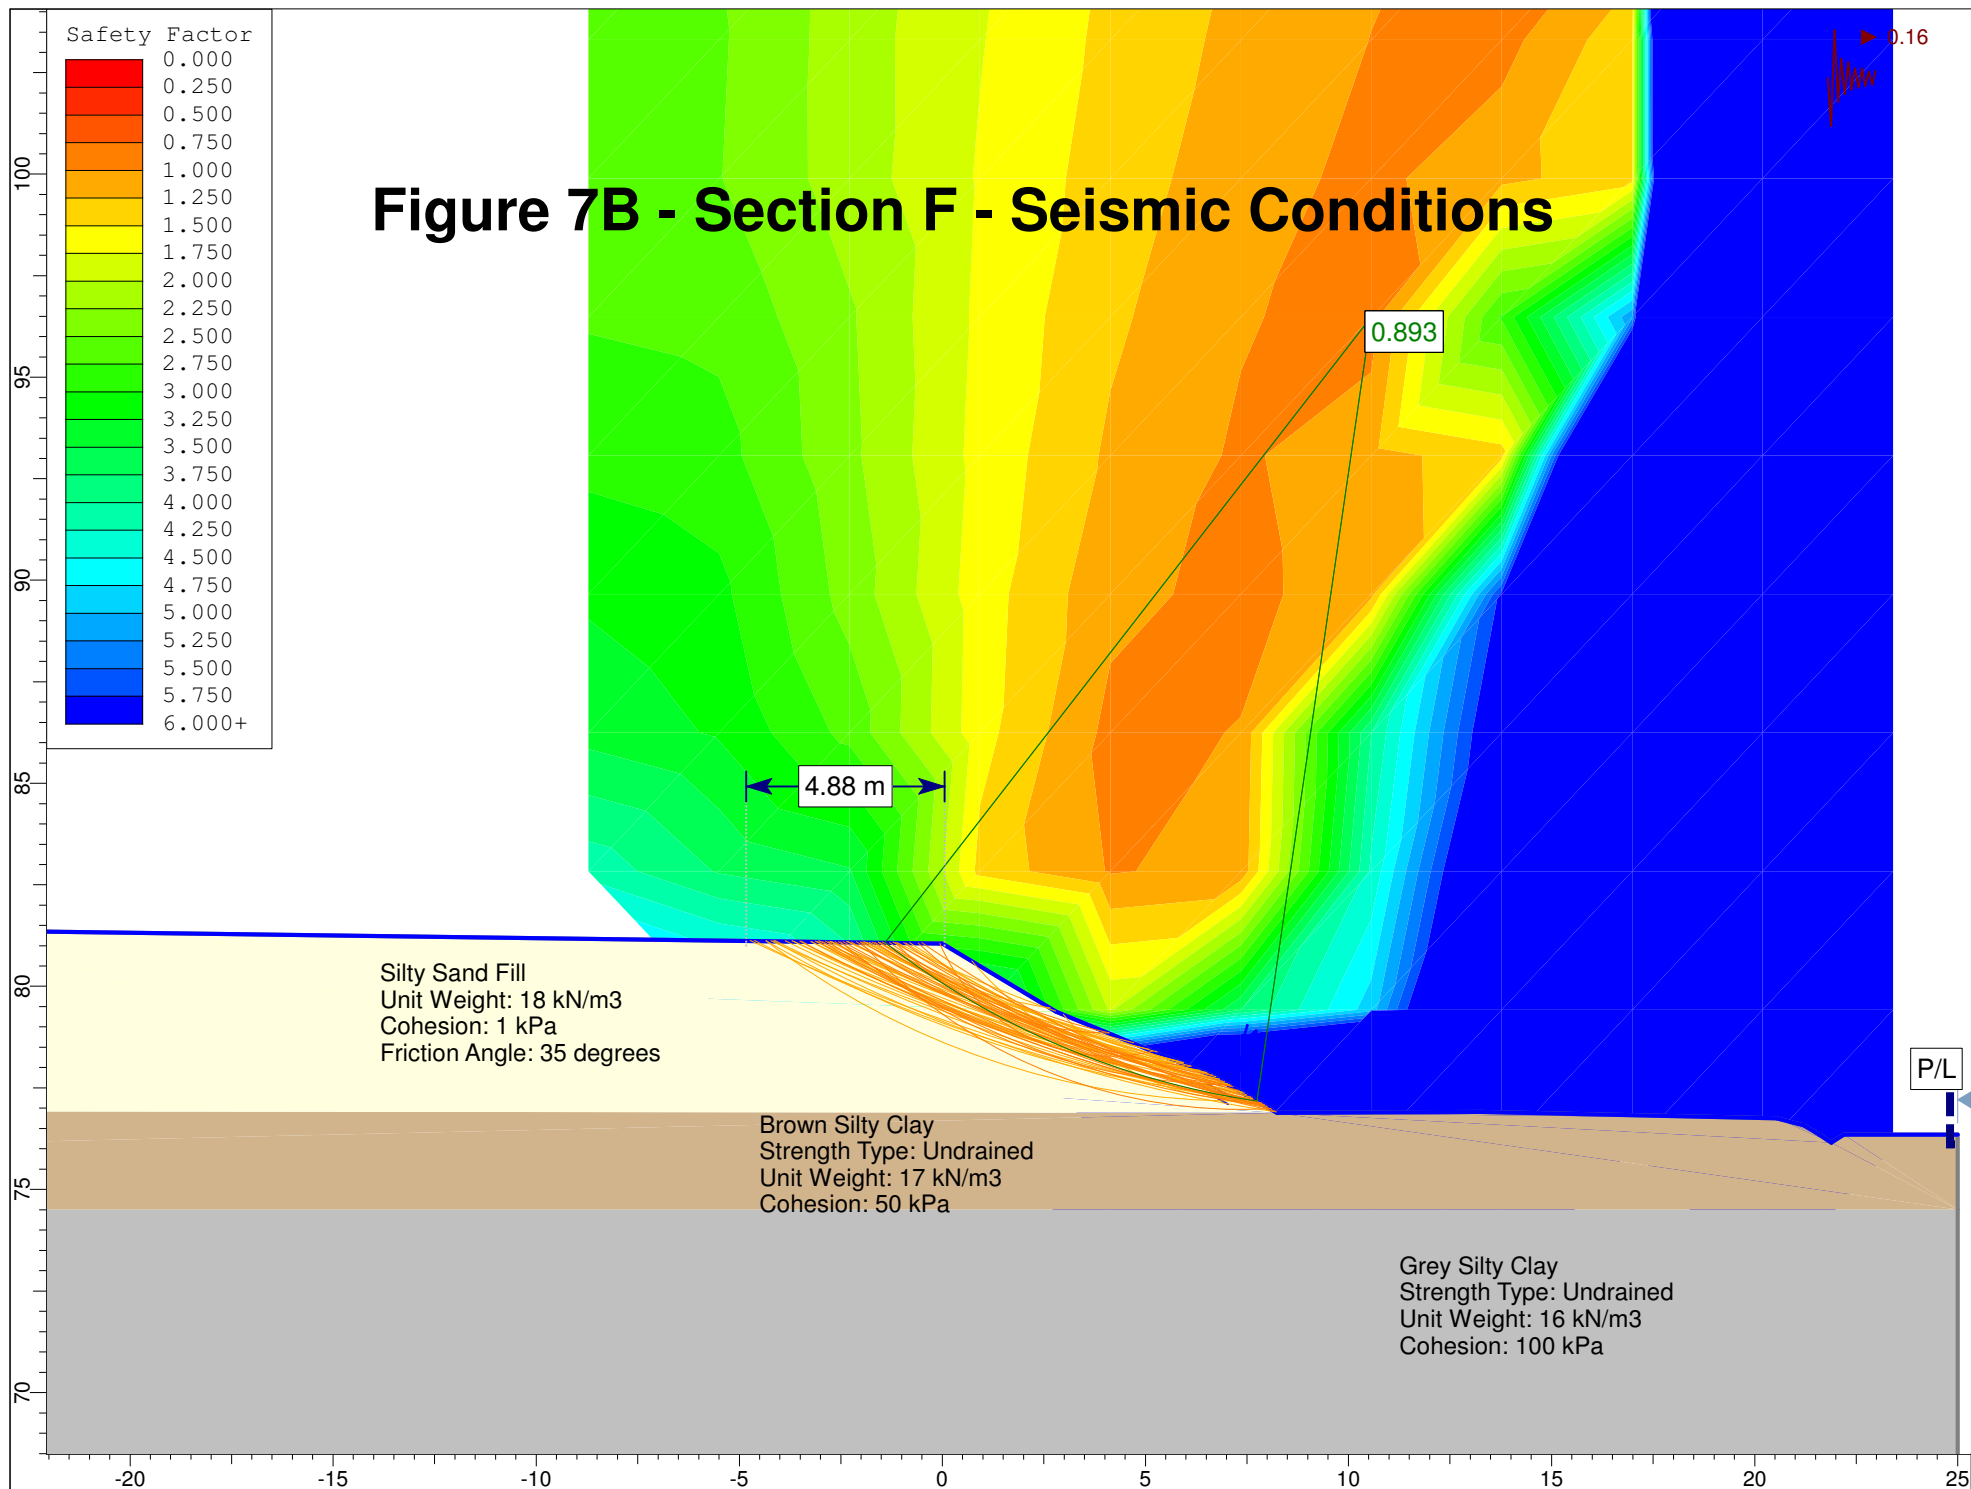

Photographs from Site Visit – September 30, 2020

Photo 1: Area of Section C facing north with subject site observed on left portion of photo. Area of ditch observed to be well-vegetated. Prior to our arrival a heavy-rainfall event had taken place which generated a gentle and low-volume flow close to Navan Road and Section C which further became negligible in flow downstream and beyond Section E.



Photo 2: Area of Section C facing north with subject site observed on left portion of photo. No signs of erosion, sloughing or distress noted throughout slope face and section.



Photographs from Site Visit – September 30, 2020

Photo 3: Area of Section D facing north with subject site to the left portion of photo. Area observed to be retaining majority of runoff and storm water and well vegetated. Slope face observed to generally consist of compacted sandy fill generated from subject site.



Photo 4: Area of Section E facing south with subject site to right portion of photo. Overburden throughout slope face generally observed to consist of an undisturbed, stiff brown silty clay with some vegetation covered by a thin layer of fill across the majority of the slope face. No notable signs of erosion, sloughing or distress throughout the slope section were observed.





Photographs from Site Visit – September 30, 2020

Photo 5: Area of Section E facing north with subject site to left portion of photo. Majority of ditch alignment observed to be well-vegetated. Water throughout ditch observed to be ponding with no flow, likely runoff from abutting portions of property.



Photo 6: Area of Section F facing south-east with photo taken from top of existing fill pile abutting towards the reviewed slope section. Existing fill side-slope observed to be well-vegetated with no signs of distress. Ground observed to be relatively flat beyond toe of fill pile and throughout valley surrounding the ditch alignment. Area of creek observed to be heavily vegetated with negligible amount of ponding water.

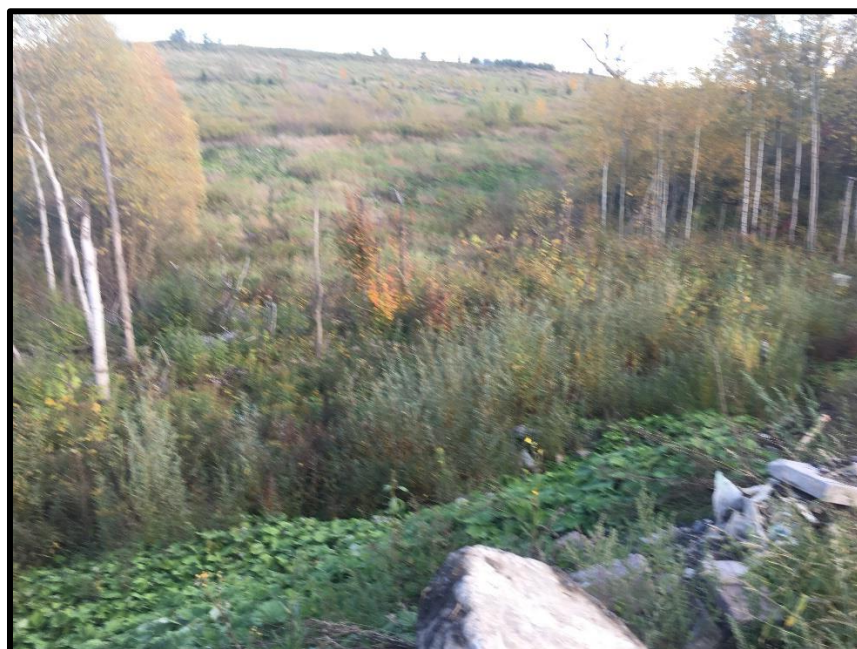

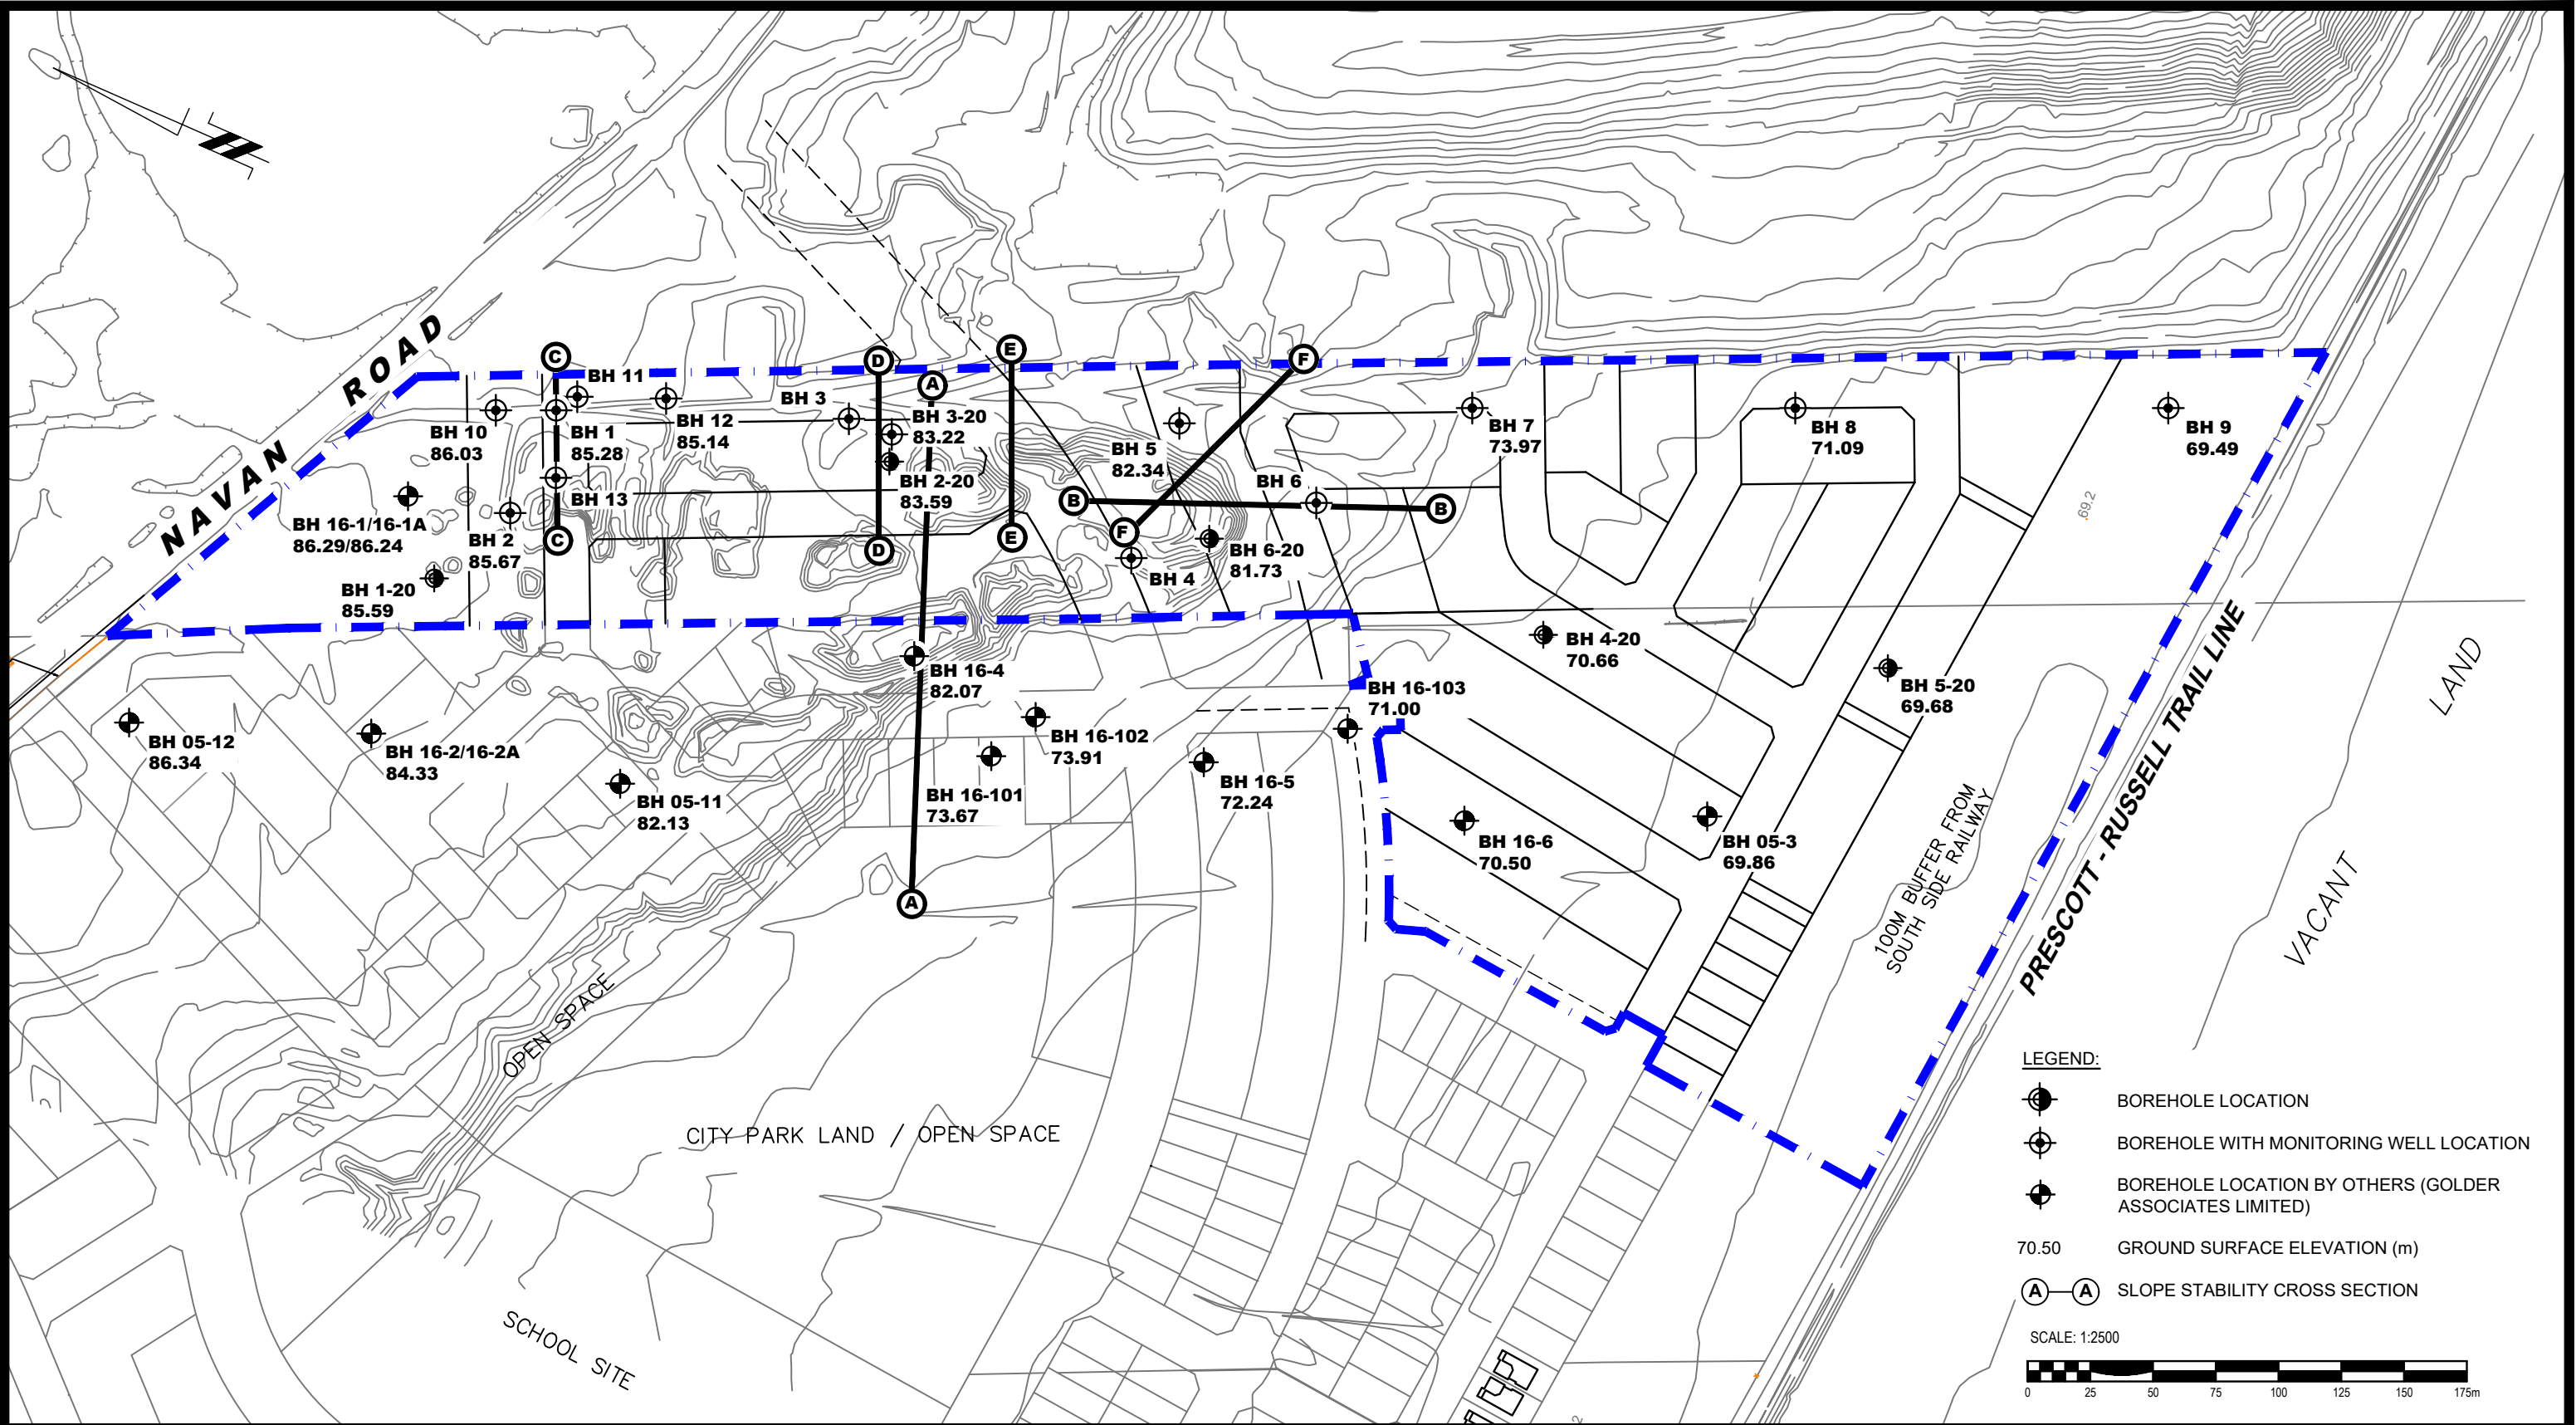

patersongroup
consulting engineers


154 Colonnade Road South
Ottawa, Ontario K2E 7J5
Tel: (613) 226-7381 Fax: (613) 226-6344

3	ADDED NEW SLOPE STABILITY CROSS SECTIONS	14/10/2020	DP
2	ADDED NEW BOREHOLES (BH 1-20 TO BH 6-20)	21/09/2020	JV
1	UPDATED TO NEW BASE PLAN	04/02/2020	JV
NO.	REVISIONS	DATE	INITIAL

CLARIDGE HOMES (GLADSTONE) INC.		ONTARIO
GEOTECHNICAL INVESTIGATION		
3252 NAVAN ROAD		
OTTAWA,	ONTARIO	
Title:	TEST HOLE LOCATION PLAN	

Scale:	1:2500	Date:	01/2020
Drawn by:	NFRV	Report No.:	PG5224-1
Checked by:	JV	Dwg. No.:	PG5224-1
Approved by:	DJG	Revision No.:	3

p:\autocad\drawings\geotechnical\pg52xx\pg524\pg5224-1.dwg (rev.03).dwg

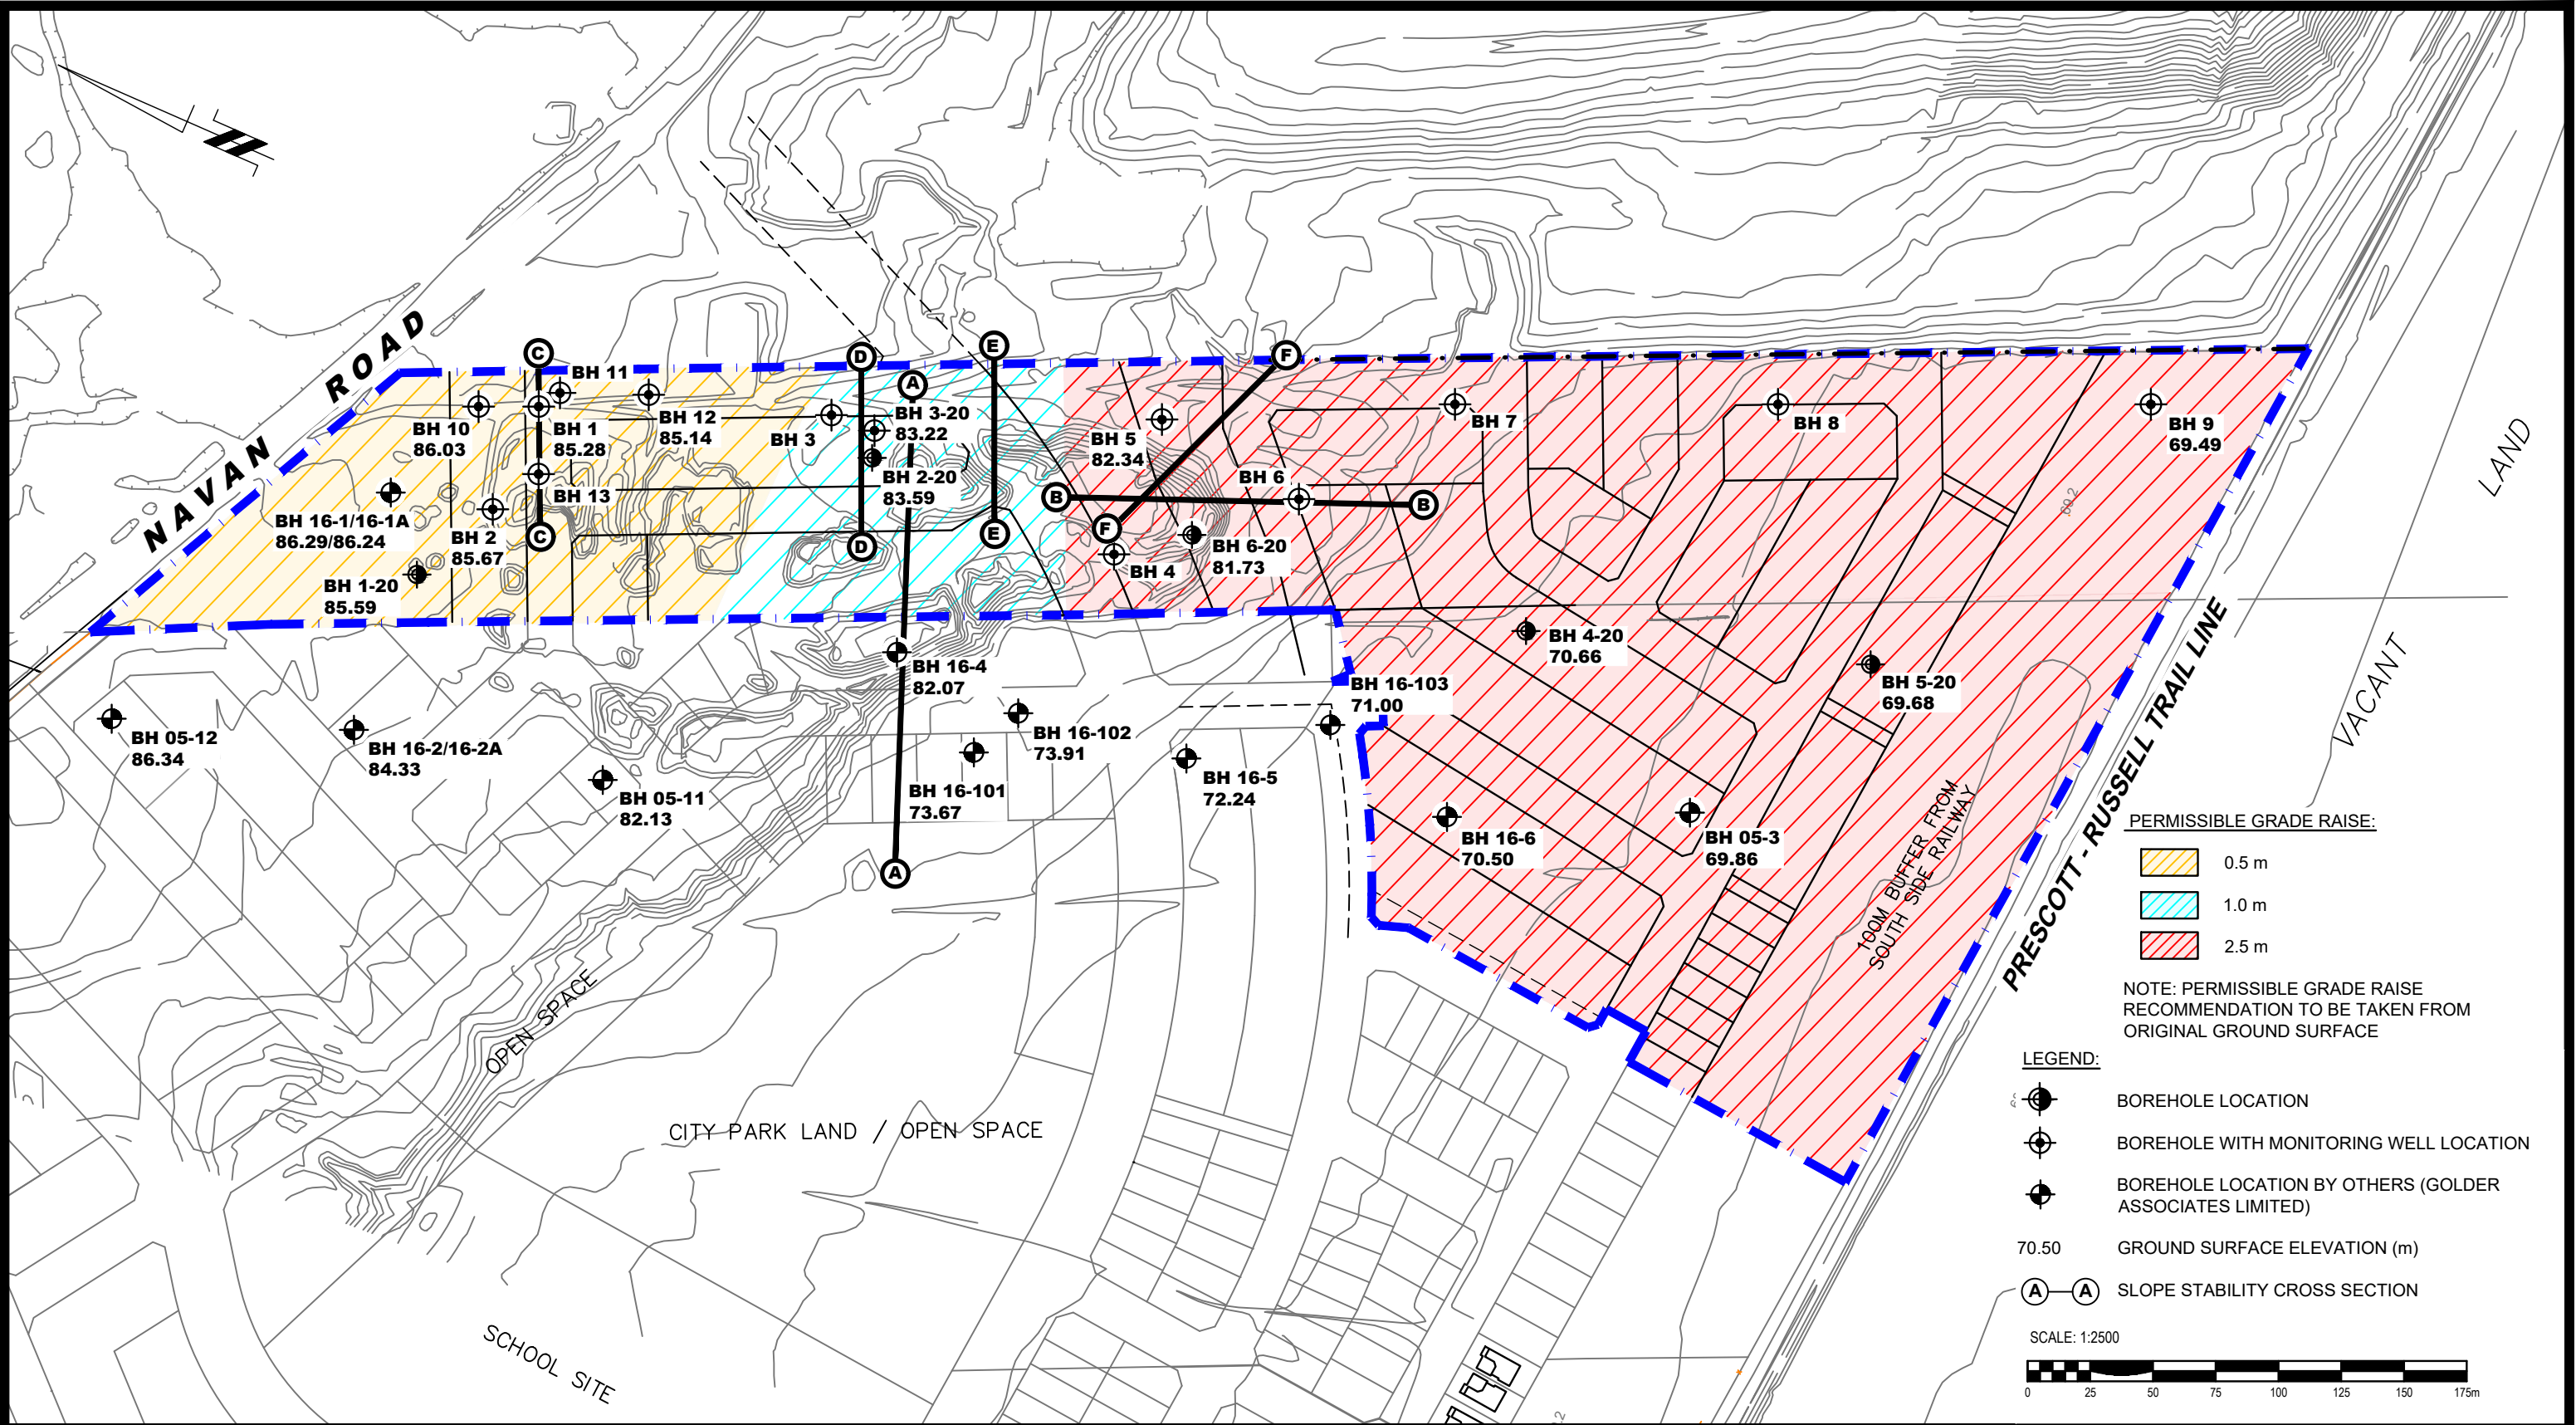

patersongroup
consulting engineers

154 Colonnade Road South
Ottawa, Ontario K2E 7J5
Tel: (613) 226-7381 Fax: (613) 226-6344

3	ADDED NEW SLOPE STABILITY CROSS SECTIONS	14/10/2020	DP
2	ADDED NEW BOREHOLES (BH 1-20 TO BH 6-20)	21/09/2020	JV
1	UPDATED TO NEW BASE PLAN	04/02/2020	JV
NO.	REVISIONS	DATE	INITIAL


CLARIDGE HOMES (GLADSTONE) INC.
GEOTECHNICAL INVESTIGATION
3252 NAVAN ROAD
ONTARIO

OTTAWA,
Title:
PERMISSIBLE GRADE RAISE PLAN

Scale:	1:2500	Date:	01/2020
Drawn by:	NFRV	Report No.:	PG5224-1
Checked by:	JV	Dwg. No.:	PG5224-2
Approved by:	DJG	Revision No.:	3

p:\autocad\drawings\geotechnical\pg52xx\pg5224\pg5224-1.dwg (rev.03).dwg

I:\133861_Symposium\7.0_Production\7.03_Design\04_LAND\Macro Grading\Figure 6.1_MACRO GRADING.dwg Layout Name: MACRO GRADING Plot Style: ----- Plot Scale: 1:4,328 Plotted At: 12/15/2025 2:08 PM Last Saved By: rdmsr072 Last Saved At: Dec 15, 2025

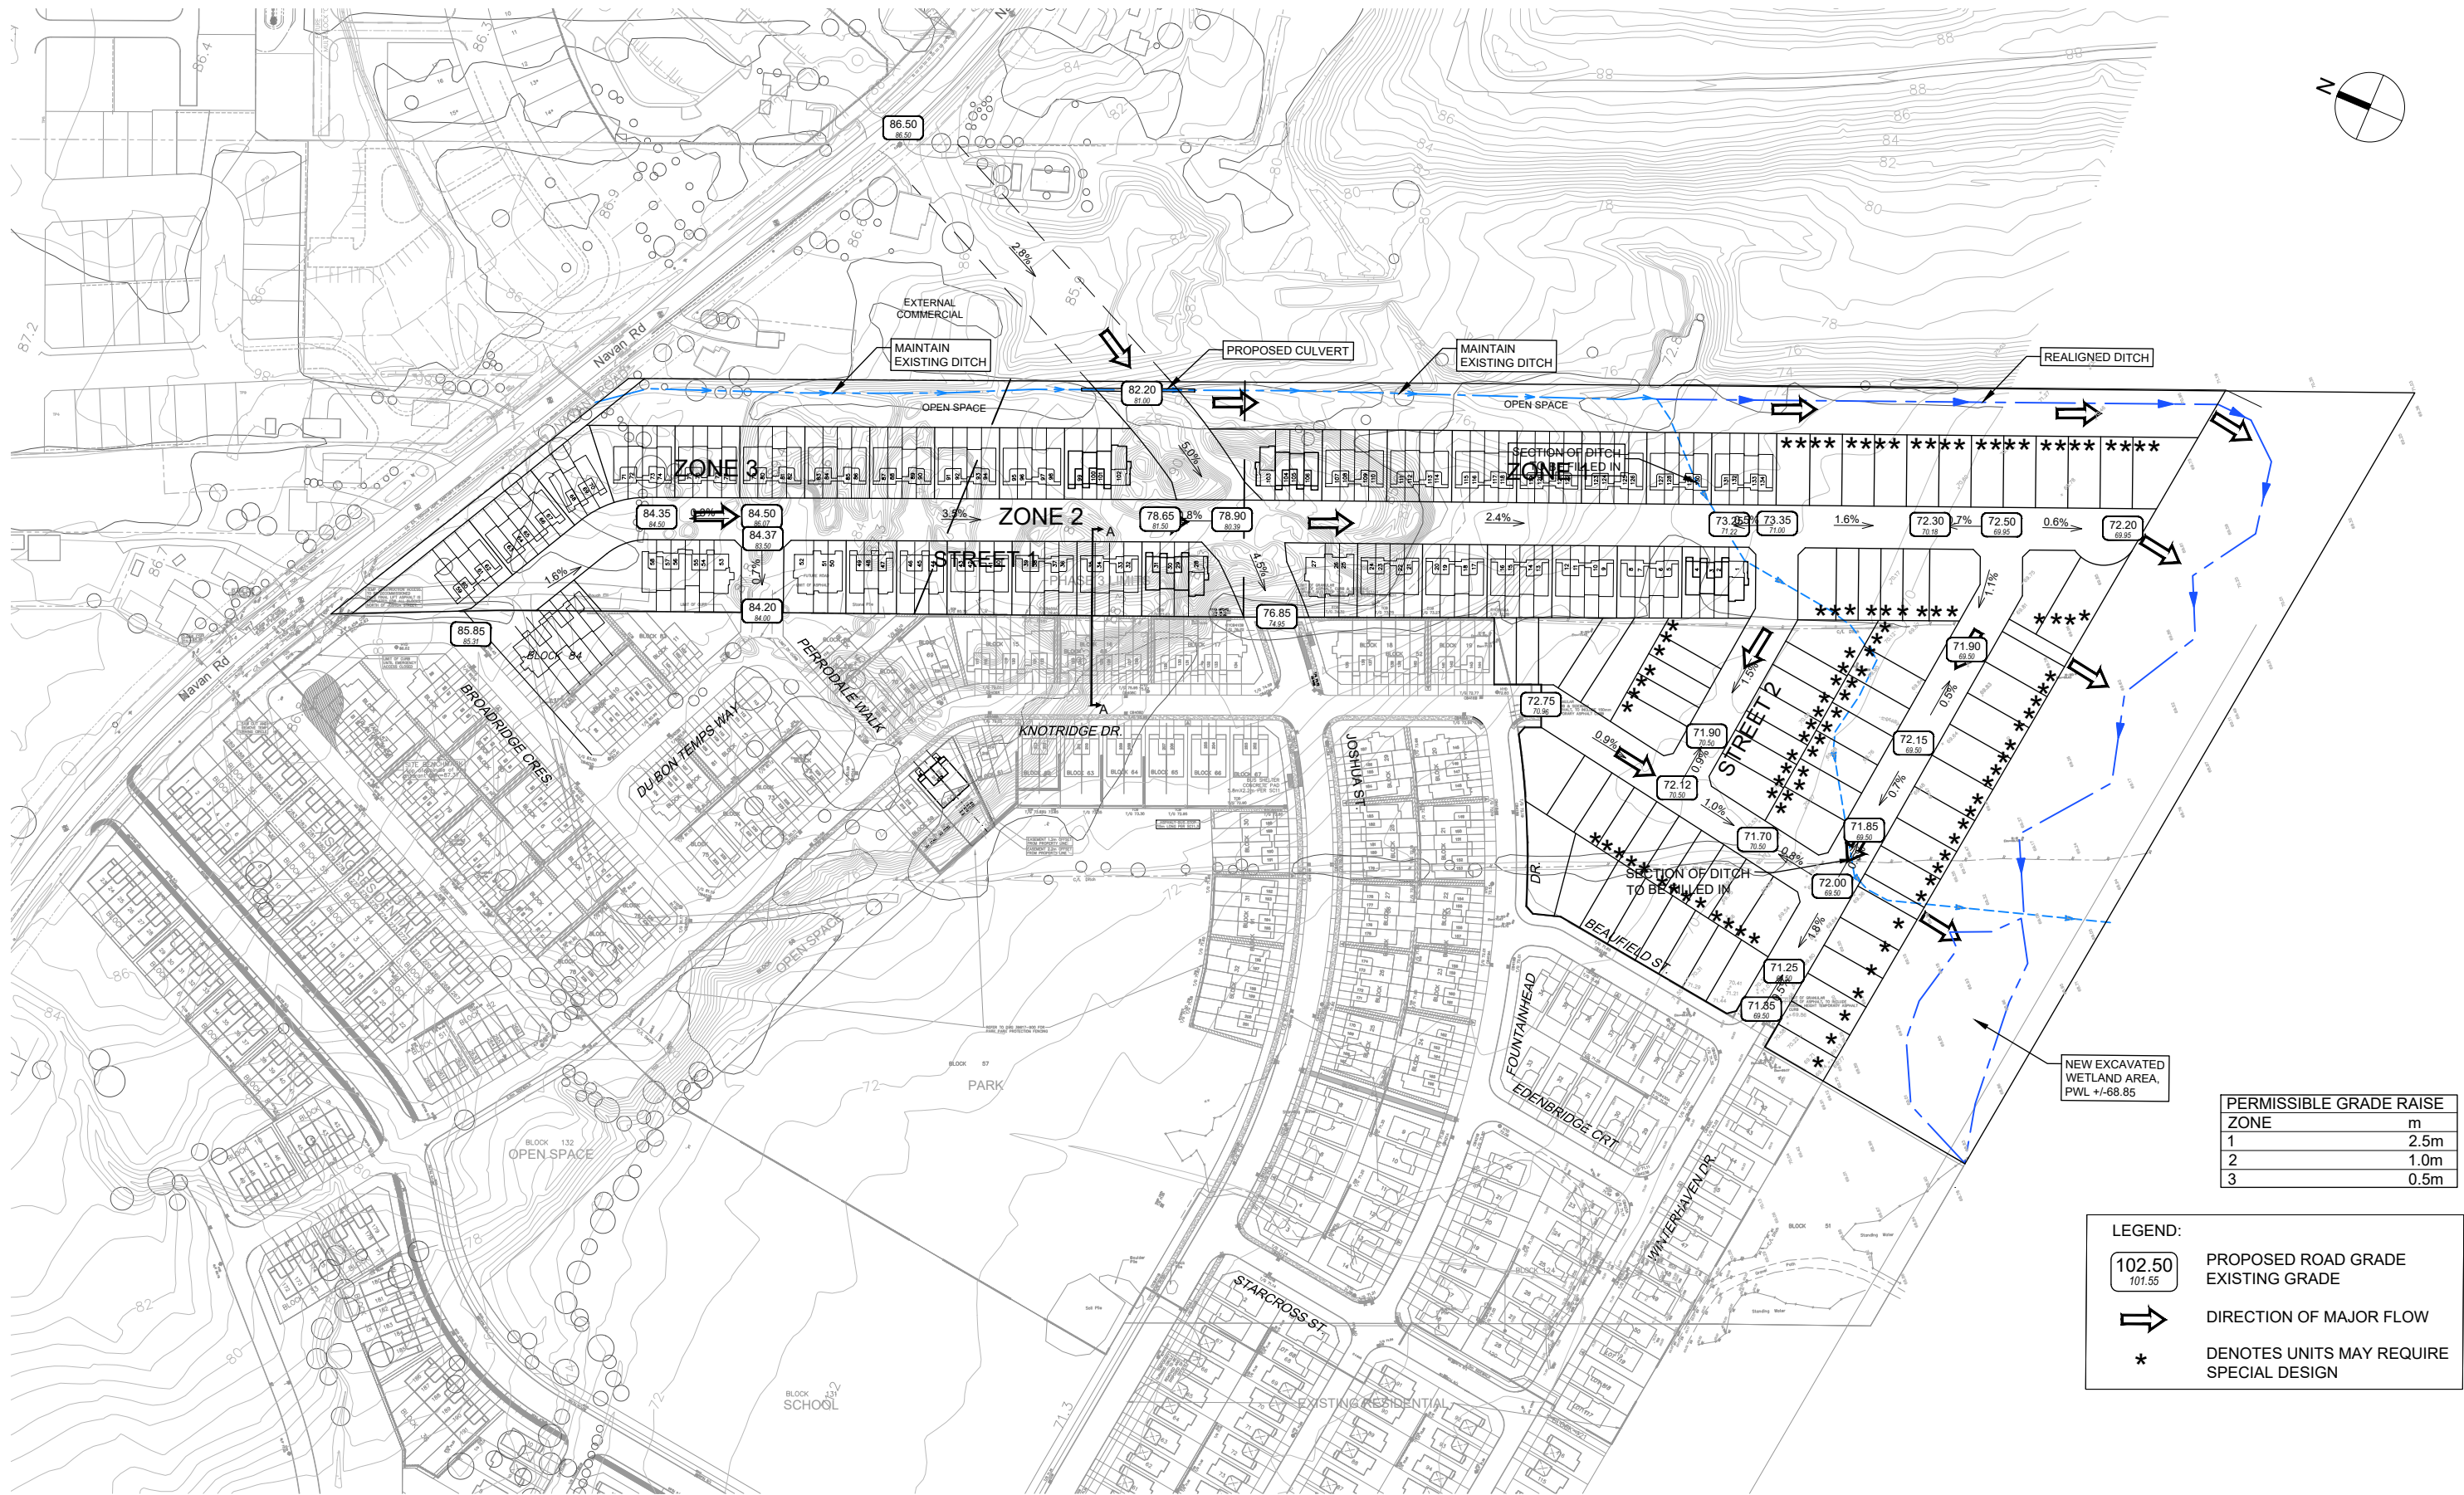

PERMISSIBLE GRADE RAISE	
ZONE	m
1	2.5m
2	1.0m
3	0.5m

LEGEND:

102.50

101.55

PROPOSED ROAD GRADE
EXISTING GRADE

DIRECTION OF MAJOR FLOW

*

DENOTES UNITS MAY REQUIRE
SPECIAL DESIGN

Scale

Project Title

Drawing Title

Sheet No.

General Content

ITEM DESCRIPTION		LOCATION
	Executive Summary (for larger reports only)	N/A
√	Date and revision number of the report	Front Cover
√	Location Map and plan showing municipal address, boundary, and layout of proposed development.	Figure 1
√	Plan showing the site and location of all existing services.	39617-100
√	Development statistics, land use, density, adherence to zoning and official plan, and reference to applicable subwatershed and watershed plans that provide context to which individual developments must adhere.	Sections 1, 2.1, 3, 3.3 and 4.1
√	Summary of Pre-consultation Meeting with City and other approval agencies.	Appendix E
√	Reference and confirm conformance to higher level studies and reports (Master Servicing Studies, Environmental Assessments, Community Design Plans), or in the case where it is not in conformance, the proponent must provide justification and develop a defensible design criteria.	Sections 2.1, 3, and 4.1
√	Statement of objectives and servicing criteria	Sections 2.2, 3.2, and 4.2
√	Identification of existing and proposed infrastructure available in the immediate area.	Figures 2.1, 3.1 and 4.1
√	Identification of Environmentally Significant Areas, Watercourses and Municipal Drains potentially impacted by the proposed development (Reference can be made to the Natural Heritage Studies, if available).	Sections 1, 7.4
√	<u>Concept level master grading plan</u> to confirm existing and proposed grades in the development. This is required to confirm the feasibility of proposed stormwater management and drainage, soil removal and fill constraints, and potential impacts to neighbouring properties. This is also required to confirm that the proposed grading will not impede existing major system flow paths.	Section 9, Figure 6.1
	Identification of potential impacts of proposed piped services on private services (such as wells and septic fields on adjacent lands) and mitigation required to address potential impacts.	N/A
	Proposed phasing of the development, if applicable.	N/A
√	Reference to geotechnical studies and recommendations concerning servicing.	Section 9

ITEM DESCRIPTION		LOCATION
	All preliminary and formal site plan submissions should have the following information: • Metric scale • North arrow (including construction North) • Key plan • Name and contact information of applicant and property owner • Property limits including bearings and dimensions • Existing and proposed structures and parking areas • Easements, road widening and rights-of-way • Adjacent street names	N/A

Development Servicing Report: Water

ITEM DESCRIPTION		LOCATION
√	Confirm consistency with Master Servicing Study, if available	Section 2.1
√	Availability of public infrastructure to service proposed development	Figure 2.1 and Section 2.1
√	Identification of system constraints – external water needed	Section 2.2.1
	Identify boundary conditions	N/A
	Confirmation of adequate domestic supply and pressure	N/A
	Confirmation of adequate fire flow protection and confirmation that fire flow is calculated as per the Fire Underwriter's Survey. Output should show available fire flow at locations throughout the development.	N/A
	Provide a check of high pressures. If pressure is found to be high, an assessment is required to confirm the application of pressure reducing valves.	N/A
	Definition of phasing constraints. Hydraulic modeling is required to confirm servicing for all defining phases of the project including the ultimate design.	N/A
	Address reliability requirements such as appropriate location of shut-off valves.	N/A
	Check on the necessity of a pressure zone boundary modification.	N/A

ITEM DESCRIPTION		LOCATION
√	Reference to water supply analysis to show that major infrastructure is capable of delivering sufficient water for the proposed land use. This includes data that shows that the expected demands under average day, peak hour and fire flow conditions provide water within the required pressure range.	Section 2.1
√	Description of the proposed water distribution network, including locations of proposed connections to the existing system, provisions for necessary looping, and appurtenances (valves, pressure reducing valves, valve chambers, and fire hydrants) including special metering provisions.	Figure 2.1
	Description of off-site required feeder mains, booster pumping stations, and other water infrastructure that will be ultimately required to service proposed development, including financing, interim facilities and timing of implementation.	N/A
√	Confirmation that water demands are calculated based on the City of Ottawa Design Guidelines.	Section 2.2.1
	Provision of a model schematic showing the boundary conditions locations, streets, parcels, and building locations for reference.	N/A

Development Servicing Report: Wastewater

ITEM DESCRIPTION		LOCATION
√	Summary of proposed design criteria (Note: Wet-weather flow criteria should not deviate from the City of Ottawa Sewer Design Guidelines. Monitored flow data from relatively new infrastructure cannot be used to justify capacity requirements for proposed infrastructure).	Section 3.2
√	Confirm consistency with Master Servicing Study and/or justifications for deviations.	Section 3.3
	Consideration of local conditions that may contribute to extraneous flows that are higher than the recommended flows in the guidelines. This includes groundwater and soil conditions, and age condition of sewers.	N/A
√	Description of existing sanitary sewer available for discharge of wastewater from proposed development.	Section 3.1 Figure 3.1

ITEM DESCRIPTION		LOCATION
√	Verify available capacity in downstream sanitary sewer and/or identification of upgrades necessary to service the proposed development. (Reference can be made to previously completed Master Servicing Study if applicable)	Section 3.3
	Calculations related to dry-weather and wet-weather flow rates from the development in standard MOE sanitary sewer design table (Appendix “C”) format.	N/A
√	Description of proposed sewer network including sewers, pumping stations and forcemains.	Section 3.3 Figure 3.1
	Discussion of previously identified environmental constraints and impact on servicing (environmental constraints are related to limitations imposed on the development in order to preserve the physical condition of watercourses, vegetation, soil cover, as well as protecting against water quantity and quality).	N/A
√	Pumping stations: impacts of proposed development on existing pumping stations or requirements for new pumping station to service development.	Section 3.3
	Forcemain capacity in terms of operational redundancy, surge pressure and maximum flow velocity.	N/A
√	Identification and implementation of the emergency overflow from sanitary pumping stations in relation to the hydraulic grade line to protect against basement flooding.	Section 3.3
	Special considerations such as contamination, corrosive environment, check soils, etc.	N/A

Development Servicing Report: Stormwater Checklist

ITEM DESCRIPTION		LOCATION
√	Description of drainage outlets and downstream constraints including legality of outlets (i.e. municipal drain, right-of-way, watercourse, or private property)	Section 4.1
√	Analysis of available capacity in existing public infrastructure.	Section 4.1
√	A drawing showing the subject lands, its surroundings, the receiving watercourse, existing drainage patterns, and proposed drainage pattern.	Figure 4.1

ITEM DESCRIPTION		LOCATION
√	Water quantity control objective (e.g. controlling post-development peak flows to pre-development level for storm events ranging from the 2 or 5 year event (dependent on the receiving sewer design) to 100 year return period); if other objectives are being applied, a rationale must be included with reference to hydrologic analyses of the potentially affected subwatersheds, taking into account long-term cumulative effects.	Sections 4.2, 4.3
√	Water quality control objective (basic, normal or enhanced level of protection based on the sensitivities of the receiving watercourse) and storage requirements.	Section 4.1
√	Description of the stormwater management concept with facility locations and descriptions with references and supporting information.	Section 4.1
	Set-back from private sewage disposal systems.	N/A
	Watercourse and hazard lands setbacks.	N/A
	Record of pre-consultation with the Ontario Ministry of Environment and the Conservation Authority that has jurisdiction on the affected watershed.	N/A
√	Confirm consistency with sub-watershed and Master Servicing Study, if applicable study exists.	Section 4.1
	Storage requirements (complete with calculations) and conveyance capacity for minor events (1:5 year return period) and major events (1:100 year return period).	N/A
	Identification of watercourses within the proposed development and how watercourses will be protected, or, if necessary, altered by the proposed development with applicable approvals.	N/A
	Calculate pre and post development peak flow rates including a description of existing site conditions and proposed impervious areas and drainage catchments in comparison to existing conditions.	N/A
	Any proposed diversion of drainage catchment areas from one outlet to another.	N/A
√	Proposed minor and major systems including locations and sizes of stormwater trunk sewers, and stormwater management facilities.	Section 4.1 Figure 4.1

ITEM DESCRIPTION		LOCATION
√	If quantity control is not proposed, demonstration that downstream system has adequate capacity for the post-development flows up to and including the 100-year return period storm event.	Section 4.4
	Identification of potential impacts to receiving watercourses	N/A
	Identification of municipal drains and related approval requirements.	N/A
√	Descriptions of how the conveyance and storage capacity will be achieved for the development.	Section 4.2
	100 year flood levels and major flow routing to protect proposed development from flooding for establishing minimum building elevations (MBE) and overall grading.	N/A
	Inclusion of hydraulic analysis including hydraulic grade line elevations.	N/A
√	Description of approach to erosion and sediment control during construction for the protection of receiving watercourse or drainage corridors.	Sections 6 & 7
	Identification of floodplains – proponent to obtain relevant floodplain information from the appropriate Conservation Authority. The proponent may be required to delineate floodplain elevations to the satisfaction of the Conservation Authority if such information is not available or if information does not match current conditions.	N/A
	Identification of fill constraints related to floodplain and geotechnical investigation.	N/A

Approval and Permit Requirements: Checklist

ITEM DESCRIPTION		LOCATION
√	Conservation Authority as the designated approval agency for modification of floodplain, potential impact on fish habitat, proposed works in or adjacent to a watercourse, cut/fill permits and Approval under Lakes and Rivers Improvement Act. The Conservation Authority is not the approval authority for the Lakes and Rivers Improvement Act. Where there are Conservation Authority regulations in place, approval under the Lakes and Rivers Improvement Act is not required, except in cases of dams as defined in the Act.	Section 10
√	Application for Certification of Approval (CofA) under the Ontario Water resources Act.	Section 10
	Changes to Municipal Drains	N/A
√	Other permits (National Capital Commission, Parks Canada, Public Works and Government Services Canada, Ministry of Transportation etc.)	Section 10

Conclusion Checklist

ITEM DESCRIPTION		LOCATION
√	Clearly stated conclusions and recommendations	Section 10
	Comments received from review agencies including the City of Ottawa and information on how the comments were addressed. Final sign-off from the responsible reviewing agency.	N/A
√	All draft and final reports shall be signed and stamped by professional Engineer registered in Ontario.	Done

Arcadis Professional Services (Canada) Inc.
333 Preston Street, Suite 500
Ottawa, Ontario K1S 5N4
Canada
Phone: 613 225 1311
www.arcadis.com